
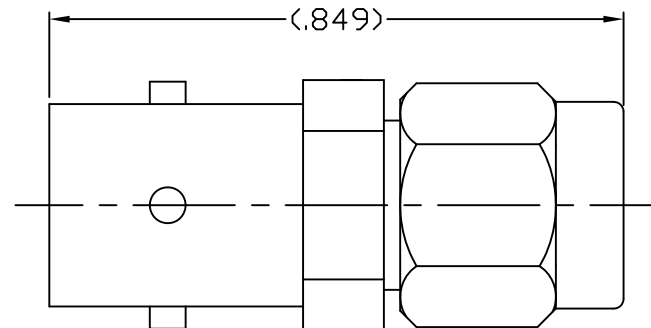


CONNECTOR SERIES: : SMA/ZMA  
 NOMINAL IMPEDANCE: (OHMS) : 50  
 FREQUENCY RANGE: : DC TO 18 GHz.

ELECTRICAL:  
 VSWR MAXIMUM : 1.15:1 TO 18 GHz  
 INSERTION LOSS MAXIMUM .05(SQRT(F(GHz)))

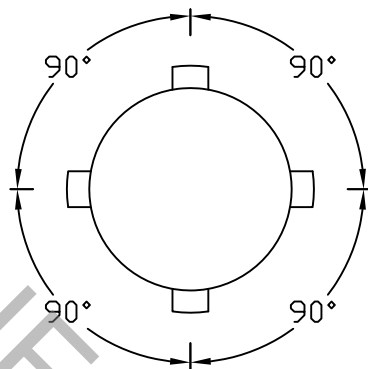


CONFIDENTIAL

ITEM	MATERIALS	FINISHES
BODY	: 303 STAINLESS PER ASTM A582	: PASSIVATE PER ASTM A380
INSULATOR	: PTFE PER ASTM-D-1710	: N/A
CONTACT	: COPPER, BERYLLIUM PER ASTM-B-196	: GOLD PER MIL-G-45204

REV.	DCN NUMBER	DATE	APP.
AA	15-2148	8/12/15	DC

SPECIFICATION CONTROL DRAWING		
DECIMALS .X ±.030 .XX ±.010 .XXX ±.005	TOLERANCES FRACTIONAL ± 1/16"	DEGREES X°±1°0' X°X'±15'
DRAWN: RMS      DATE: 8/12/15 APPROVED: DC      DATE: 8/12/15		
SCALE	CODE IDENT	SHEET
N/A	2J899	1 of 1



INCORPORATED  
 Haverhill, MA. 01835

---

TITLE  
**ZMA JACK TO  
 SMA PLUG**

---

DRAWING  
 NO. **1100-1498-6219**