


SPECIFICATION CONTROL DRAWING

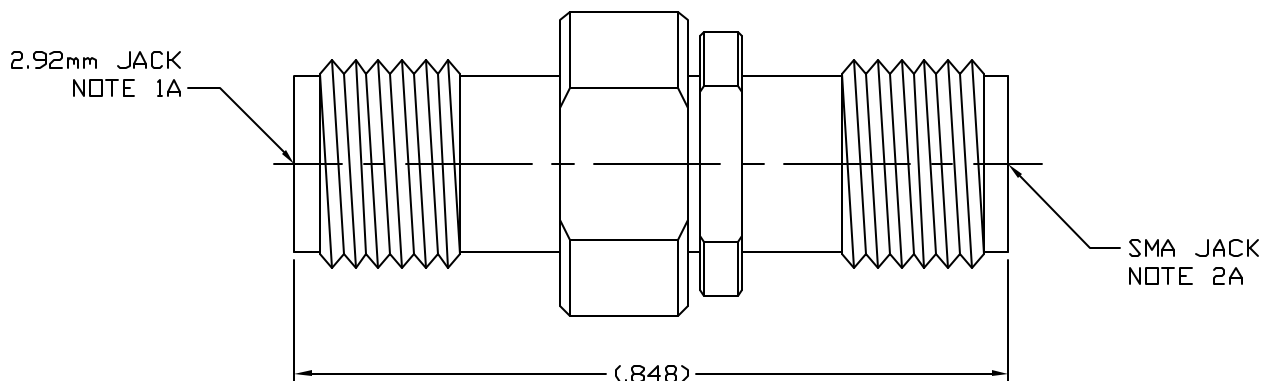


1. MATING
- 1A. INTERFACE DIMENSIONS PER DYNAWAVE MD-95.
 - 2A. INTERFACE DIMENSIONS PER MIL-STD-348, (Fig. 310-2)/SMA SERIES AND DYNAWAVE MD-99.

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 26.5 GHz.
VSWR (MAX) *	1.25:1 MAX.
INSERTION LOSS (dB MAX)	.035 dB x \sqrt{FGHz} .
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX VRMS)	335
RF LEAKAGE (MIN. dB DOWN)	100 dB - FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65°C TO +165°C
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,000
INSULATION RESISTANCE (MIN. MEGOHMS)	10,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			 INCORPORATED HAVERHILL, MA. 01836
AA	03-2432	11/12/03	DC	DECIMALS $X \pm .030$ $XX \pm .010$ $XXX \pm .005$	FRACTIONAL $\pm 1/64$	ANGULAR $X \pm 1'$ $X \cdot X \pm 15'$	
				SURFACE ROUGHNESS 63 $\sqrt{MIL-STD 10}$.			
				DRAWN DC	DATE 11/12/03		
				APPROVED DC	DATE 11/12/03		
				CODE IDENT.	SHEET 1 OF 2	DWG. NO.	1100-9599-6200
				2J899			

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE _____ 6.0 LBS.
- MIN. RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) _____ 32.0
- WITHDRAWAL (MIN. OUNCES) _____ 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX IN. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE (SMA, JACK) _____ 7 - 10 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-85 °c TO + 165 °c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 108, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (250 VRMS)

5. MATERIAL

BODY _____ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A

CONTACT _____ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND. H.T.

INSULATOR _____ TEFLON PER MIL-P-19463 AND I-P-403, TYPE 1.

6. FINISH

BODY _____ PASSIVATE PER QQ-P-35A, TYPE 1.

CONTACT _____ GOLD PER ATSM B 488, TYPE I, CODE C, CLASS 2.5
(.000100 MIN.) OVER NICKEL PER QQ-N-290 OVER
COPPER PER MIL-C-14660 (.000010 MIN. THK.)

INSULATOR _____ N/A