


# SPECIFICATION CONTROL DRAWING

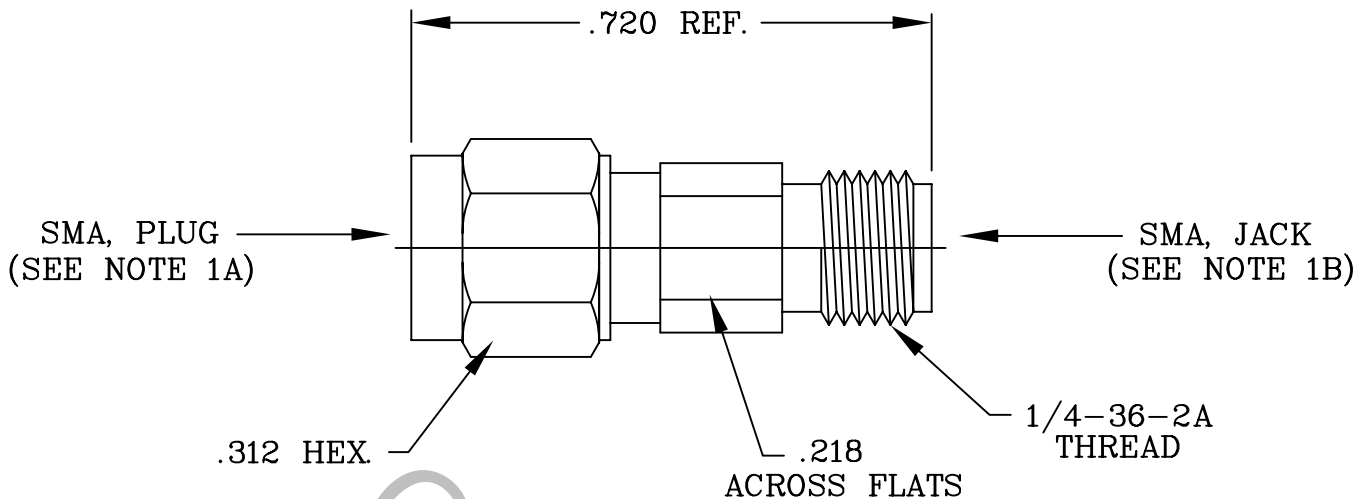

1. MATING
  - 1A. INTERFACE DIMENSIONS PER MIL-STD-348, (Fig. 310-1)/SMA SERIES AND DYNAWAVE MD-98.
  - 2A. INTERFACE DIMENSIONS PER MIL-STD-348, (Fig. 310-2)/SMA SERIES AND DYNAWAVE MD-99.

## 2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 27.0 GHz.
VSWR (MAX) *	_____	1.04 + .005 x FGHz.
INSERTION LOSS (dB MAX)	_____	.035 dB x $\sqrt{\text{FGHz}}$ .
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX VRMS)	_____	335
RF LEAKAGE (MIN. dB DOWN)	_____	100 dB - FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65°C TO +165°C
DIELECTRIC WITHSTANDING VOLTAGE (MAX VRMS)	_____	1,000
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	10,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

\* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			dynawave INCORPORATED HAVERHILL, MA 01835
AA	00-0681	5/18/00	AJH	DECIMALS .X + .030 .XX ± .010 .XXX ± .005	FRACTIONAL ± 1/64	ANGULAR X ° ± 1' 0" X ° X' ± 15"	
AB	01-0986	10/22/01	TS	SURFACE ROUGHNESS 63 $\sqrt{\text{MIL-STD 10}}$ .			
				DRAWN KLF	DATE 5/18/00	TITLE SMA, PLUG TO SMA, JACK ADAPTER	
				APPROVED AJH	DATE 5/18/00		
				CODE IDENT. 2J899	SHEET 1 OF 2	DWG. NO. 1100-9899-6201	

# SPECIFICATION CONTROL DRAWING

## 3. MECHANICAL

### CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE \_\_\_\_\_ 6.0 LBS.
- MIN. RADIAL TORQUE \_\_\_\_\_ N/A

### CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) \_\_\_\_\_ 48.0
- WITHDRAWAL (MIN. OUNCES) \_\_\_\_\_ 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. IN. LBS.) \_\_\_\_\_ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) \_\_\_\_\_ 1,000

RECOMMENDED MATING TORQUE (SMA, PLUG) \_\_\_\_\_ 7 - 10 IN. LBS.

## 4. ENVIRONMENTAL

TEMPERATURE CYCLING \_\_\_\_\_ MIL-STD-202, METHOD 102, COND. C ( -65 ° c TO + 165 ° c )

SHOCK \_\_\_\_\_ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION \_\_\_\_\_ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE \_\_\_\_\_ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION \_\_\_\_\_ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) \_\_\_\_\_ MIL-STD-202, METHOD 105, COND. C ( 70,000 FT. ) ( 250 VRMS )

## 5. MATERIAL

BODY AND COUPLING NUT \_\_\_\_\_ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A

CONTACT AND RETAINING RING \_\_\_\_\_ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND. H.T.

INSULATOR \_\_\_\_\_ TEFLON PER MIL-P-19463 AND L-P-403, TYPE 1.

GASKET \_\_\_\_\_ SILICON RUBBER PER ZZ-R-765, CLASS IIB, GRADE 50 OR 60.

## 6. FINISH

BODY AND COUPLING NUT \_\_\_\_\_ PASSIVATE PER QQ-P-35A, TYPE 1.

CONTACT \_\_\_\_\_ GOLD PER MIL-G-45204, TYPE 1, GRADE C, CLASS 2.  
(.000010 MIN.) OVER NICKEL PER QQ-N-290, CLASS 1  
(.00010 MIN.) OVER COPPER PER MIL-C-14550 (.000010 MIN.)

GASKET \_\_\_\_\_ N/A

INSULATOR \_\_\_\_\_ N/A