


SPECIFICATION CONTROL DRAWING

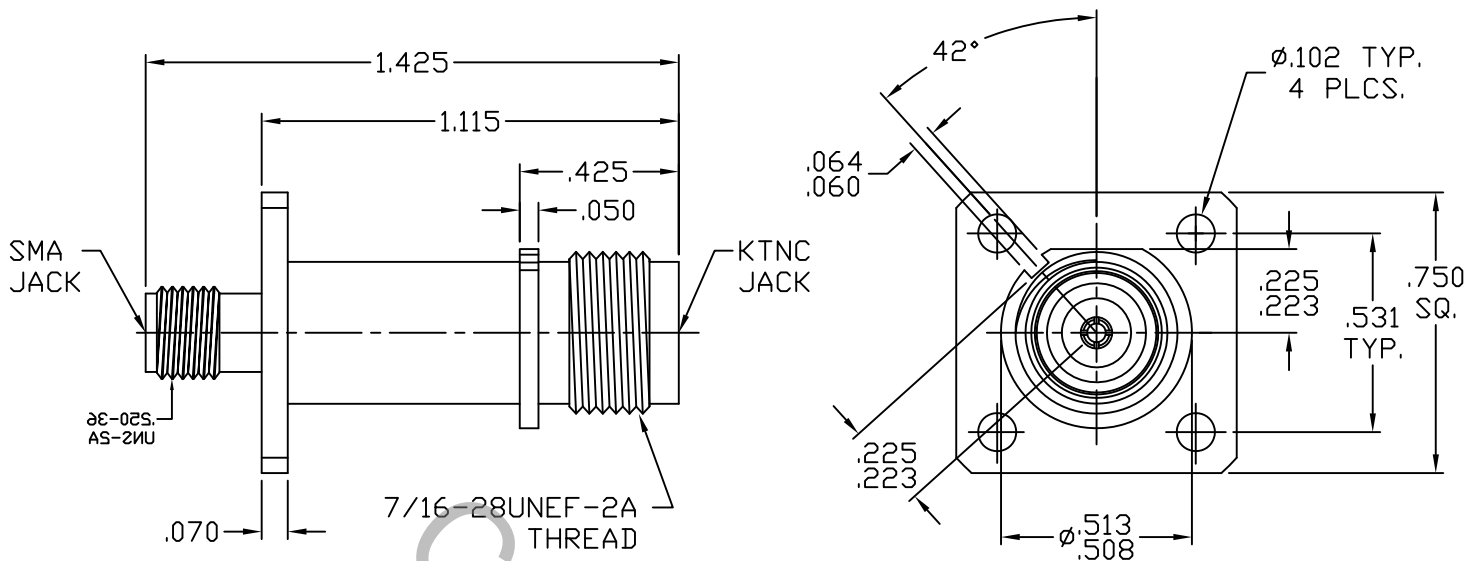


1. MATING INTERFACE DIMENSIONS Per MIL-STD-348
Fig. 313.2 (TNC JACK) AND 310.2 (SMA JACK).

2. ELECTRICAL

| | | |
|---|-------|--------------------------------|
| FREQUENCY RANGE GHz | _____ | DC TO 18.0 GHz |
| VSWR (MAX.) * | _____ | 1.10 + .010 x FGHz |
| INSERTION LOSS (dB MAX.) * | _____ | 0.45 dB x $\sqrt{\text{FGHz}}$ |
| NOMINAL IMPEDANCE (OHMS) | _____ | 50 |
| VOLTAGE RATING (MAX. VRMS) | _____ | 500 |
| RF LEAKAGE (MIN. dB DOWN) | _____ | -100 dB - FGHz |
| TEMPERATURE RATING (DEGREES CENTIGRADE) | _____ | -65°C TO + 165°C |
| DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS) | _____ | 1,500 |
| INSULATION RESISTANCE (MIN. MEGOHMS) | _____ | 5,000 |
| CONTACT RESISTANCE | | |
| • CENTER CONTACT (MAX. MILLIOHMS) | _____ | 3.0 |
| • OUTER CONTACT (MAX. MILLIOHMS) | _____ | 2.0 |

* TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

| REV. | DCN NO. | DATE | APP. | DIMENSIONS ARE IN INCHES TOLERANCES |  HAVERHILL, MA 01835 |
|------|---------|---------|------|--|--|
| AA | 09-1211 | 3/6/09 | TS | DECIMALS .X ± .030 .XX ± .010 .XXX ± .005 | TITLE KTNC JACK (KEYED) 4 HOLE FLANGE MOUNT TO SMA JACK ADAPTER |
| AB | 09-1222 | 3/11/09 | TS | FRACTIONAL ± 1/64 | |
| | | | | DRAWN TS DATE 3/6/09 | DWG. NO. 1154-8799-6201 |
| | | | | APPROVED DGG DATE 3/6/09 | |
| | | | | CODE IDENT. 2J899 | SHEET 1 OF 2 |

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

MAX AXIAL FORCE _____ 6.0 LBS.

MAX RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

● INSERTION (MAX. OUNCES) _____ INTERFACE 32.0

● WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE _____ SMA 7 - 10 IN. LBS.
TNC 30 - 35 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65° c TO + 165° c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

5. MATERIAL

BODY, HEX NUT & LOCKWASHER _____ STAINLESS STEEL PER ASTM-A-582, TYPE 303, COND. A

CONTACT _____ BERYLLIUM COPPER PER ASTM-B-196/B, 196M-03, COPPER ALLOY No. UNS-C17300, TEMPER TD04.

INSULATOR _____ TEFLON PER ASTM D 1710-02, TYPE 1, GRADE 1, CLASS B.

6. FINISH

BODY _____ PASSIVATE PER AMS QQ-P-35, TYPE 2.

CONTACT _____ GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 2.5
(.000100 MIN. THK.) OVER NICKEL per QQ-N-290
(.000050 MIN. THK.) OVER COPPER per MIL-C-14550
(.000010 MIN. THK.)

INSULATOR _____ N/A