


SPECIFICATION CONTROL DRAWING

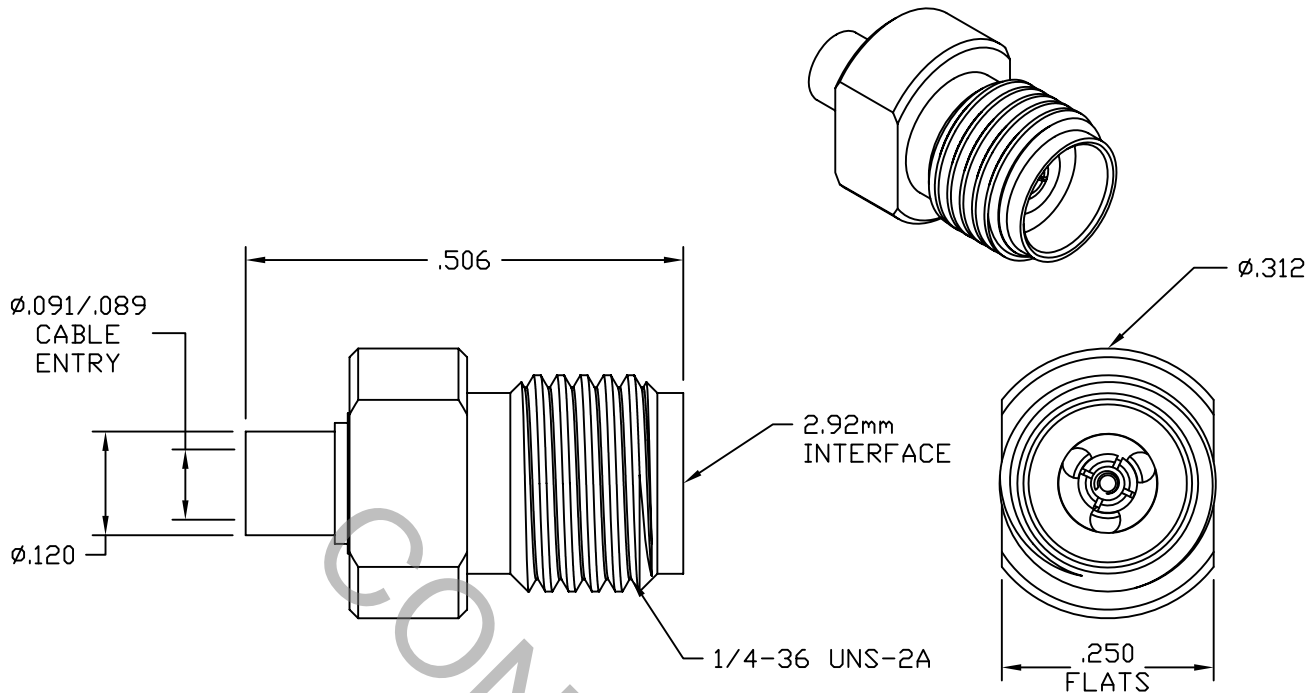


1. MATING INTERFACE DIMENSIONS FOR 2.92mm, JACK per MD-95.

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 40.0 GHz
VSWR (MAX.) *	_____	1.05 + .01 x FGHz
INSERTION LOSS (dB MAX.)	_____	.03 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	250
RF LEAKAGE (MIN. dB DOWN)	_____	100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-25 ° c TO + 100 ° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	750
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	10,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			 INCORPORATED HAVERHILL, MA. 01835
				DECIMALS	FRACTIONAL	ANGULAR	
AA	03-2587	12/18/03	DC	.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1° 0' X° X' ± 15'	
AB	06-1587	5/4/06	DC				
AC	13-1801	6/3/13	DC	DRAWN: BN DATE: 12/17/03			TITLE 2.92mm, JACK, DIRECT SOLDER ATTACHMENT FOR RG405
				APP.: DC DATE: 12/18/03			
				CODE IDENT.	SHEET 1 OF 2	DWG. NO.	9500-8525-6200
				2J899			

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

MAX. AXIAL FORCE _____ 6.0 LBS.

MAX. RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

● INSERTION (MAX. OUNCES) _____ INTERFACE 48.0

● WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT(MAX. IN. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE _____ 7 - 10 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-25° c TO +100° c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

CONNECTOR BODY & SLEEVE _____ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A

CONTACTS _____ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND. H.T.

FILLER INSULATOR _____ TEFLON PER ASTM-D-1710-02, TYPE 1, GRADE 1, CLASS B.

INSULATOR BEAD _____ POLYSTYRENE

6. FINISH

CONNECTOR BODY _____ PASSIVATE PER AMS-2700, TYPE 2, CLASS 4.

CONTACTS & SLEEVE _____ GOLD per ASTM B488 TYPE II, GRADE C, CLASS 2
(.000100 Minimum Thickness) OVER NICKEL per
QQ-N-290, CLASS 1 (.000100 Minimum Thickness) OVER
COPPER per MIL-C-14550 (.000010 Minimum Thickness).

INSULATORS _____ N/A