


# SPECIFICATION CONTROL DRAWING

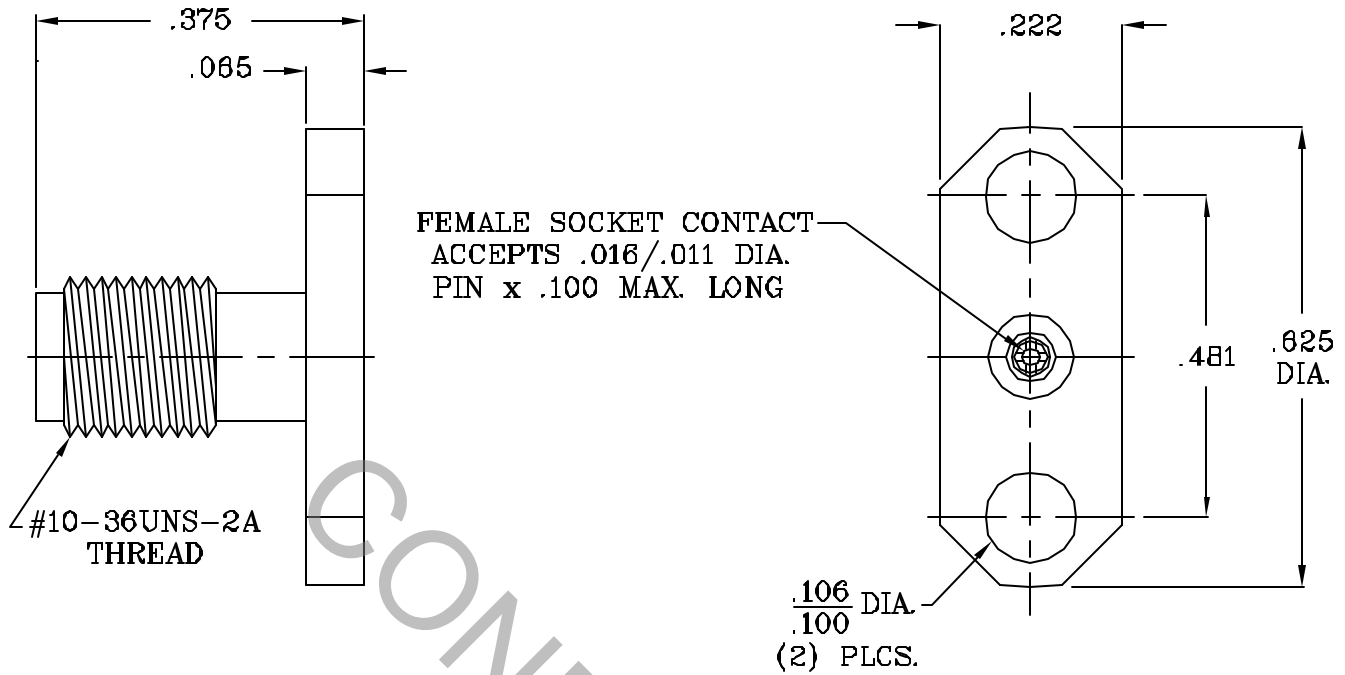


1. MATING INTERFACE DIMENSIONS SSMA JACK per DYNAWAVE MD-93

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 26.5 GHz.
VSWR (MAX) *	_____	1.05 + .008 x FGHz
INSERTION LOSS (dB MAX.)	_____	.035 dB x $\sqrt{\text{FGHz}}$ .
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	250
RF LEAKAGE (MIN. dB DOWN)	_____	100 dB - FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65° c TO +165° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	750
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	5,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	3.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

\* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS      FRACTIONAL      ANGULAR .X ± .050                      ± 1/64                      X° ± 9' .XX ± .010                                                           XX' ± 15' .XXX ± .005 SURFACE ROUGHNESS 63 √ MIL-STD 10.	 HAVERHILL, MA. 01830
AA	03-1376	3/24/03	DC	DRAWN DC      DATE 3/24/03 APPROVED DC      DATE 3/24/03	TITLE FIELD REPLACEABLE SSMA, JACK 2 HOLE FLANGE MOUNT .481 HOLE SPACING
BA	03-1612	5/8/03	DC		
				CODE IDENT. 2J899	DWG. NO. 9752-0081-6200
				SHEET 1 OF 2	

# SPECIFICATION CONTROL DRAWING

## 3. MECHANICAL

### CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE \_\_\_\_\_ 6.0 LBS.
- MIN. RADIAL TORQUE \_\_\_\_\_ N/A

### CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) \_\_\_\_\_ INTERFACE: 48.0; REAR 32.0
- WITHDRAWAL (MIN. OUNCES) \_\_\_\_\_ INTERFACE: 2.0; REAR 1.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX IN. LBS.) \_\_\_\_\_ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) \_\_\_\_\_ 500

RECOMMENDED MATING TORQUE \_\_\_\_\_ 6 - 8 IN. LBS.

## 4. ENVIRONMENTAL

TEMPERATURE CYCLING \_\_\_\_\_ MIL-STD-202, METHOD 102, COND. C ( -85 ° c TO + 200 ° c )

SHOCK \_\_\_\_\_ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION \_\_\_\_\_ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE \_\_\_\_\_ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION \_\_\_\_\_ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) \_\_\_\_\_ MIL-STD-202, METHOD 105, COND. C ( 70,000 FT. ) ( 190 VRMS )

## 5. MATERIAL

BODY \_\_\_\_\_ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A.

CONTACT \_\_\_\_\_ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND .H.T.

INSULATOR \_\_\_\_\_ TEFLON PER MIL-P-18466 AND L-P-403, TYPE I

## 6. FINISH

BODY \_\_\_\_\_ PASSIVATE PER QQ-P-35A, TYPE 1

CONTACT \_\_\_\_\_ GOLD PER MIL-G-45204, TYPE II, GRADE C, CLASS 2  
(.000100 MINIMUM THICKNESS) OVER NICKEL, PER  
QQ-N-290, CLASS 1 (.000100 MINIMUM THICKNESS) OVER  
COPPER PER MIL-C-14650 (.000010 MINIMUM THICKNESS).

INSULATOR \_\_\_\_\_ N/A