


SPECIFICATION

CONTROL

DRAWING

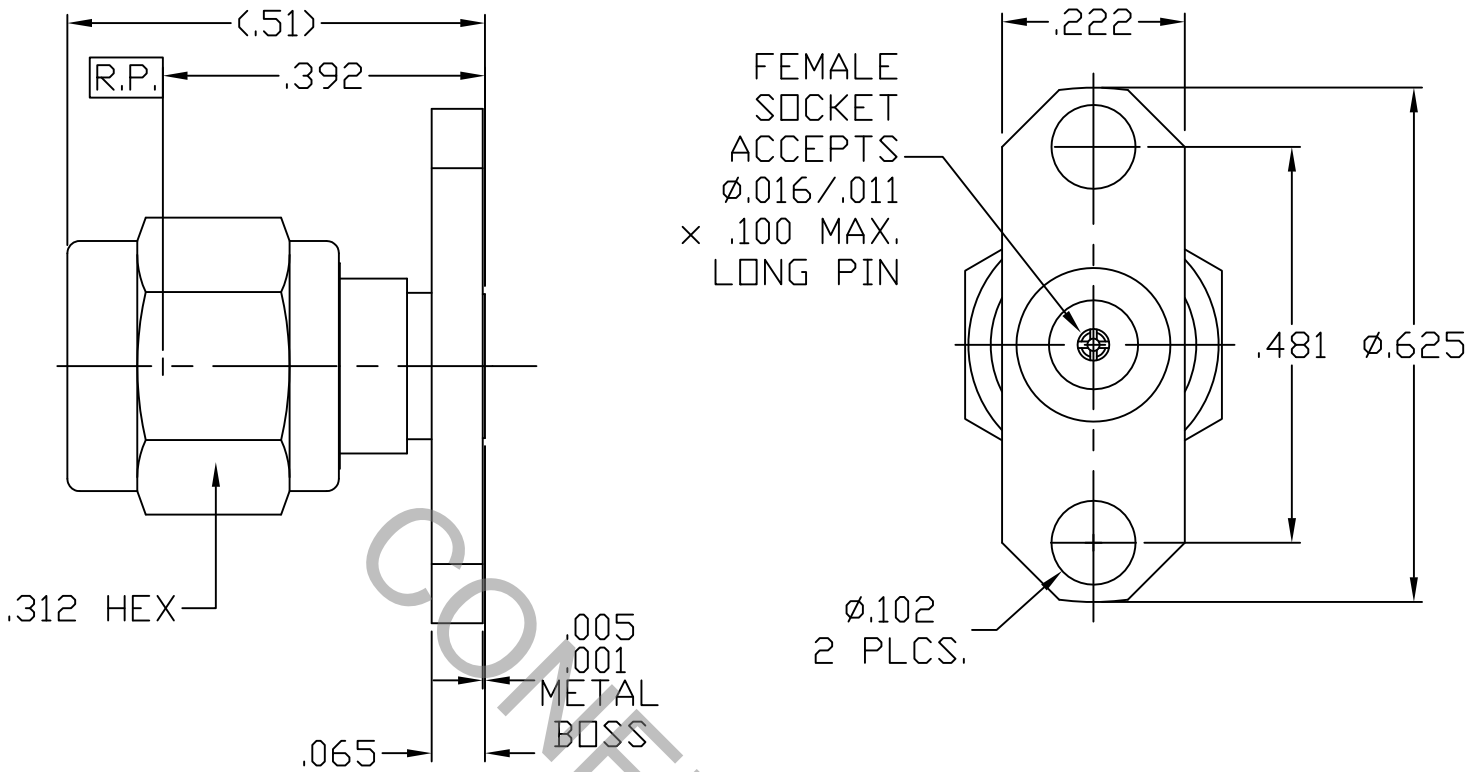

1. MATING INTERFACE DIMENSIONS PER MIL-STD-348A Fig. 310.1 (SMA PLUG).


2. ELECTRICAL

| | |
|---|--------------------|
| FREQUENCY RANGE GHz | DC TO 26.5 GHz |
| VSWR (MAX) * | 1.05 + .006 x FGHz |
| INSERTION LOSS (dB MAX) * | .04 dB x √FGHz |
| NOMINAL IMPEDANCE (OHMS) | 50 |
| VOLTAGE RATING (MAX. VRMS) | 250 |
| RF LEAKAGE (MIN. dB DOWN) | -100 dB - FGHz |
| TEMPERATURE RATING (DEGREES CENTIGRADE) | -65°C TO + 165°C |
| DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS) | 750 |
| INSULATION RESISTANCE (MIN. MEGOHMS) | 10,000 |
| CONTACT RESISTANCE | |
| • CENTER CONTACT (MAX. MILLIOHMS) | 6.0 |
| • OUTER CONTACT (MAX. MILLIOHMS) | 2.0 |

* TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

This Document contains proprietary and confidential information.

| REV. | DCN NO. | DATE | APP. | DIMENSIONS ARE IN INCHES TOLERANCES | | |  HAVERHILL, MA 01835 |
|------|---------|---------|------|--|--------------|--------------|--|
| | | | | DECIMALS | FRACTIONAL | ANGULAR | |
| - | 947 | 4/93 | MB | .X ± .030 | | X ° ± 1° 0' | TITLE SMA PLUG 2 HOLE FLANGE FIELD REPLACEABLE ACCEPTS Ø.016/.011 PIN |
| AA | 08-1665 | 7/22/08 | DC | .XX ± .010 | ± 1/64 | X ° X' ± 15' | |
| AB | 16-1779 | 6/24/16 | TS | .XXX ± .005 | | | DWG. NO. 9852-0881-6215 |
| | | | | DRAWN M.B. | DATE 4/93 | | |
| | | | | APPROVED DGG | DATE 4/93 | | |
| | | | | CODE IDENT. | SHEET 1 OF 2 | | |
| | | | | 2J899 | | | |

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

MAX AXIAL FORCE _____ 4.5 LBS.

MAX RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

● INSERTION (MAX OUNCES) _____ REAR 32.0

● WITHDRAWAL (MIN. OUNCES) _____ REAR 1.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE _____ 7 - 10 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 107, COND. C (-65° c TO + 165° c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

BODY & COUPLING NUT _____ STAINLESS STEEL PER ASTM-A-582, TYPE 303, COND. A

CONTACT & RETAINING RING _____ BERYLLIUM COPPER PER ASTM B 196/B, 196M-03, COPPER ALLOY No. UNS-C17300, TEMPER TD04.

INSULATOR _____ TEFLON PER ASTM D-1710-02, TYPE 1, GRADE 1, CLASS B.

6. FINISH

BODY & COUPLING NUT _____ PASSIVATE PER AMS 2700, TYPE 2, CLASS 4.

CONTACT _____ GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 1.27
(.000050 MIN. THK.) OVER NICKEL PER SAE AMS QQ-N-290, CLASS 1
(.000050 MIN. THK.) OVER COPPER PER AMS 2418 (.000010 MIN. THK.)

INSULATOR, GASKET & RETAINING RING _____ N/A