


SPECIFICATION CONTROL DRAWING

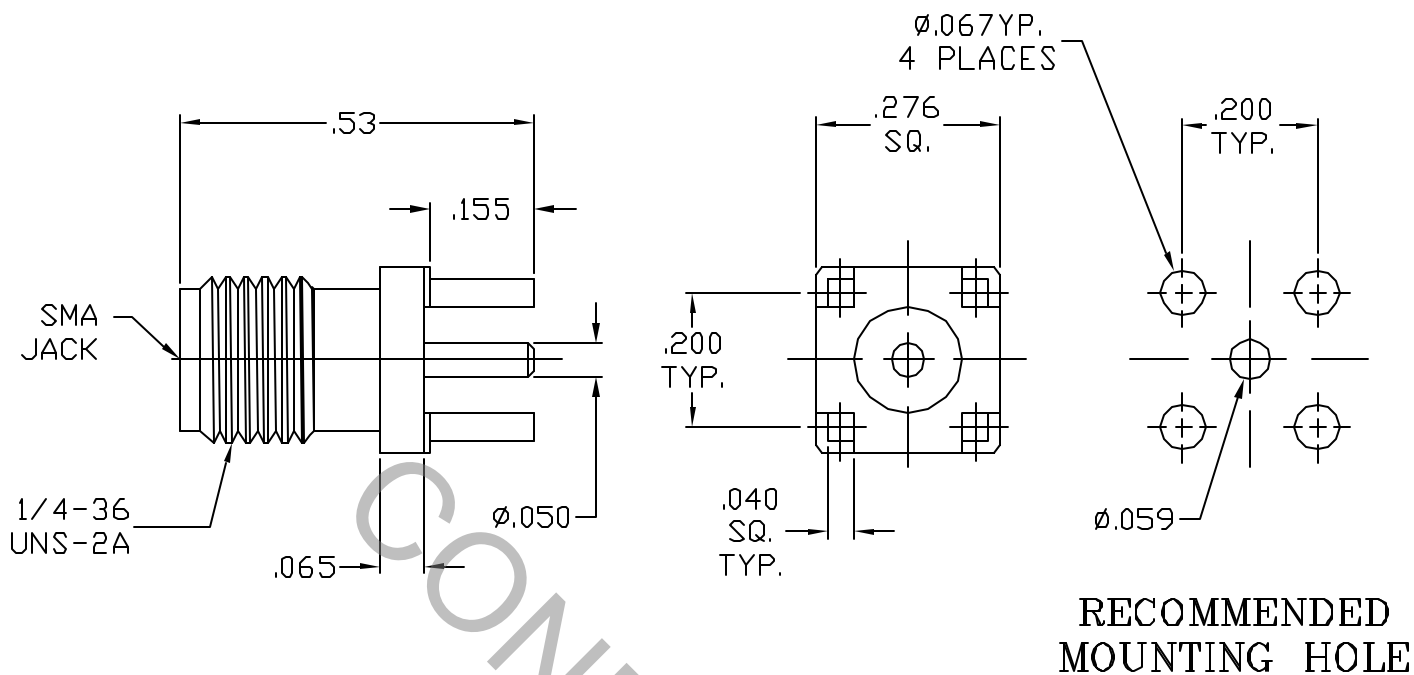

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348A, Fig. 310.2 (SMA JACK)

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz.
VSWR (MAX) *	N/A
INSERTION LOSS (dB MAX) *	N/A
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	335
RF LEAKAGE (MIN. dB DOWN)	N/A
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65° c TO +165° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,000
INSULATION RESISTANCE (MIN. MEGOHMS)	10,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	3.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			HAVERHILL, MA 01835
AA	07-1010			DECIMALS .X ± .030 .XX ± .010 .XXX ± .006	FRACTIONAL ± 1/64	ANGULAR X° ± 1° X' ± 15'	
				SURFACE ROUGHNESS 63 √ MIL-BYD 10.			TITLE SMA, JACK STRAIGHT, 4 POST THRU HOLE MOUNT
				DRAWN TS	DATE 1/3/07		
				APPROVED DC	DATE 1/3/07		
				CODE IDENT. 2J899	SHEET 1 OF 2		DWG. NO. 9920-0031-2724

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE _____ 6.0 LBS.
- MIN. RADIAL TORQUE _____ N/A

CONNECTOR ENGAGEMENT FORCES

- INSERTION (MAX. OUNCES) _____ 48.0
- WITHDRAWAL (MIN. OUNCES) _____ 2.0

CONNECTOR DURABILITY (MIN. MATING) _____ 500

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-85 °c TO + 200 °c)
SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)
VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b
CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 106, COND. C (70,000 FT.) (250 VRMS)

5. MATERIAL

CONNECTOR BODY _____ BRASS PER ASTM B36, TEMPER H02, ALLOY C36000
CENTER CONTACT _____ BERYLLIUM COPPER PER ASTM B 193/B 196M-03, COPPER ALLOY
No. UNS C17300, TEMPER T004
INSULATOR _____ TEFLON PER ASTM D1710-02, TYPE 1, GRADE 1, CLASS B

6. FINISH

CONNECTOR BODY _____ NICKEL PER QQ-N-290, CLASS 1 (.000200 MIN. THK.)
CENTER CONTACT _____ GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 2.5
(.000100 MIN.) OVER NICKEL PER QQ-N-290, CLASS 1
(.000050 MIN.) OVER COPPER PER ML-C-14550 (.000010 MIN.)
INSULATOR _____ N/A