


SPECIFICATION CONTROL DRAWING

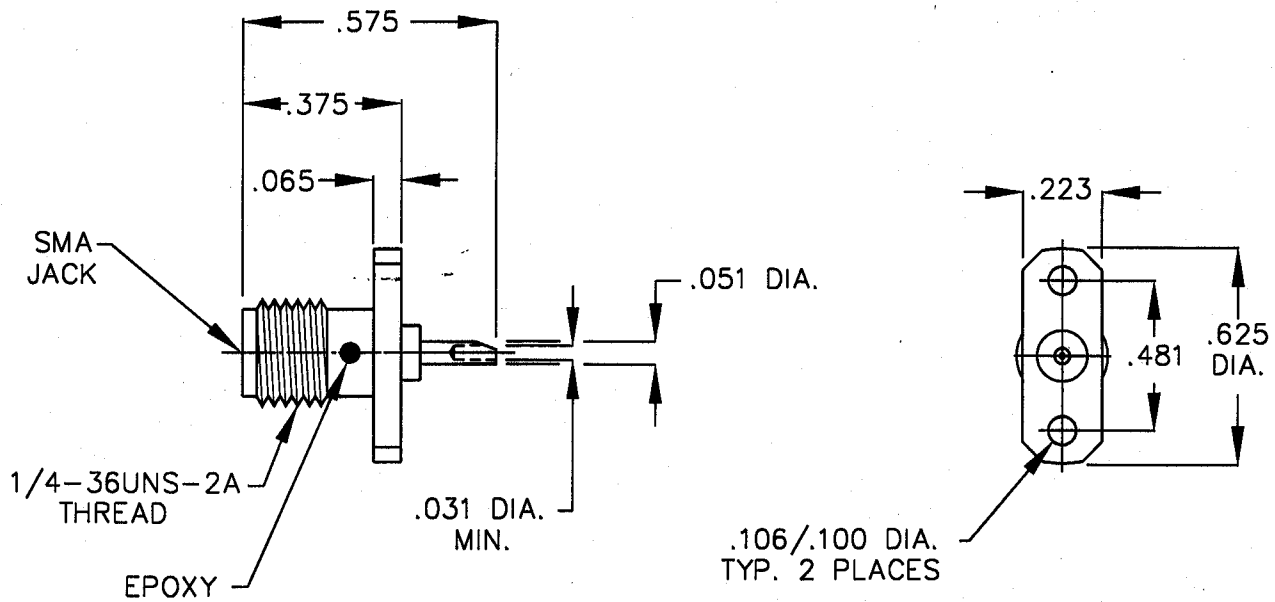


1. MATING INTERFACE DIMENSIONS PER MIL-STD-348A, (Fig. 310.2), SMA, JACK AND DYNAWAVE SPECIFICATION MD-99.

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 18.0 GHz.
VSWR (MAX.) *	_____	1.05 + .008 x FGHz.
INSERTION LOSS (dB MAX.) *	_____	.040 dB x $\sqrt{\text{FGHz}}$.
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	335
RF LEAKAGE (MIN. dB DOWN)	_____	80 dB - FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65 ° c TO + 150 ° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	1,000
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	10,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

*TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			 GEORGETOWN MA. 01833
AA	02-0946	11/14/02	BA	DECIMALS .X ± .030 .XX ± .010 .XXX ± .005	FRACTIONAL ±/64	ANGULAR X ° ± 1 0' X ° X' ± 15'	
				DRAWN	G.E.	DATE 11/8/02	TITLE SMA, JACK 2 HOLE FLG. MOUNT EPOXY CAPTIVATED SOLDER POT TERMINAL
				APPROVED	BA	DATE 11/14/02	
				CODE IDENT.		SHEET 1 OF 2	DWG. NO. 9952-0022-2452
				2J899			

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

MAX. AXIAL FORCE _____ 10.0 LBS.

MAX. RADIAL TORQUE _____ 4.0 IN. LBS.

CENTER CONTACT AXIAL FORCES

● INSERTION (MAX. OUNCES) _____ 48.0

● WITHDRAWAL (MIN. OUNCES) _____ 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. IN. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE _____ 7 - 10 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65 °c TO + 165 c°)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (250 VRMS)

5. MATERIAL

BODY _____ BRASS PER ASTM B16, TEMPER H02, ALLOY C3600

CONTACT _____ BERYLLIUM COPPER PER ASTM B196-90, COPPER ALLOY
No. UNS-C17300, TEMPER TD04.

INSULATOR _____ TEFLON PER ASTM D 4894-91.

6. FINISH

BODY _____ GOLD PER ATSM B 488, TYPE I, CODE C, CLASS 1.25
(.000050/.000100 Thk.) OVER NICKEL per QQ-N-290
(LOW STRESS) CLASS I (.000100/.000150 Thk.) OVER
COPPER per MIL-C-14550 (.000040 Minimum Thickness).

CONTACT _____ GOLD PER ATSM B 488, TYPE I, CODE C, CLASS 2.5
(.000100 Minimum Thickness) OVER NICKEL per
QQ-N-290 (.000050 Minimum Thickness) OVER
COPPER per MIL-C-14550 (.000010 Minimum Thickness).

INSULATOR _____ N/A

dynamwave
INCORPORATED

SHEET 2 OF 2

DWG.
NO.

9952-0022-2452

REV.

AA