INFORMATION CONTAINED WITHIN THIS DYNAWAVE CABLE INC. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF DYNAWAVE CABLE INC. HAVERHILL, MA. 01835

SPECIFICATION CONTROL DRAWING

DWG. NO. DTHD-SS-XXX

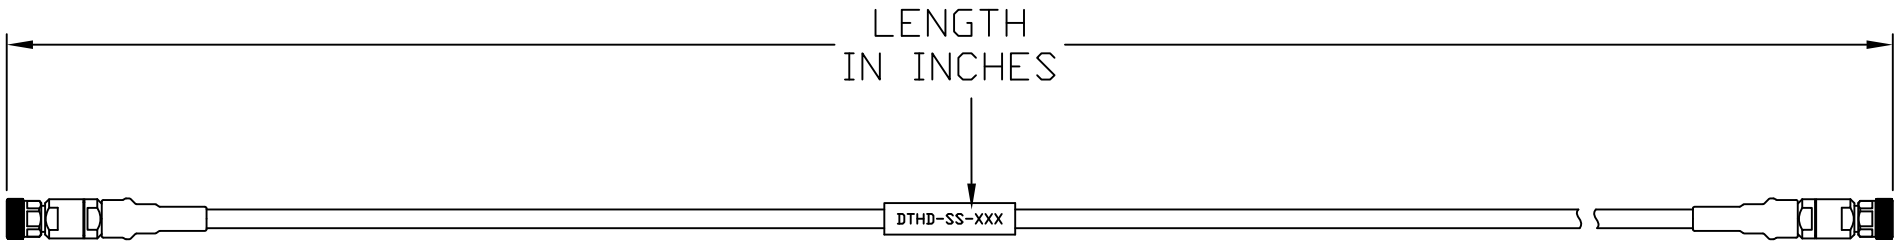

TABLE

PART NUMBER	LENGTH	LOSS dB
DTHD-SS-324	324"	-30.80
DTHD-SS-144	144"	-14.00
DTHD-SS-120	120"	-11.70
DTHD-SS-108	108"	-10.60
DTHD-SS-096	96"	-9.50
DTHD-SS-084	84"	-8.40
DTHD-SS-072	72"	-7.20
DTHD-SS-060	60"	-6.10
DTHD-SS-048	48"	-5.00
DTHD-SS-039	39"	-4.20
DTHD-SS-036	36"	-3.90
DTHD-SS-024	24"	-2.70

CONFIDENTIAL

NOTES:
1) ASSEMBLE CONNECTORS PER MANUFACTURERS INSTRUCTIONS.
2) TESTED 100%, DC - 26.5 GHz., VSWR 1.30:1, LOSS -X.XXdB (SEE TABLE).
3) TEST DATA SUPPLIED WITH ASSEMBLY.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	2	75 DUROMETER PVC	PROTECTIVE CAP (NOT SHOWN)
4	A/R	M23053/5	MARKER, WHITE
3	A/R	STRAIN RELIEF	SUMITUBE B2(3X)
2	A/R	DF440W	Ø.180 LOW LOSS CABLE
1	2	9800-440W-6201	SMA(P)STR, SO/CL, DF440W

REV.	DCN NUMBER	DATE	APP.
AA	16-1289	2/29/16	DC
BA	16-1590	5/11/16	DC

REV. 10/13

PACKAGE MARKING

CUST. CAGE: N/A
CUST. P/N: N/A
DYNA. CAGE: 6DZL5
DYNA. P/N: DTHD-SS-XXX
LOT NO.: XXXXXX
DATE CODE: XXXX

TOLERANCES

DECIMALS	FRACTIONAL	DEGREES
.X ±.250 .XX ±.125 .XXX ±.060	± 1/16"	X°±1°O' X°X' ±15'

A. DIMENSIONS ARE IN INCHES.

CUSTOMER

CATALOG ITEM

DRAWN: DC DATE: 2/29/16

APPROVED: DC DATE: 2/29/16

SCALE	CODE IDENT	SHEET
N/A	6DZL5	1 of 1

dynawave® CABLE INCORPORATED
Haverhill, MA. 01835

TITLE

DynaTest™ ASSEMBLY

DRAWING NO. DTHD-SS-XXX