INFORMATION CONTAINED WITHIN THIS DYNAWAVE CABLE INC. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF DYNAWAVE CABLE INC. HAVERHILL, MA. 01835

SPECIFICATION CONTROL DRAWING

DWG. NO. EMEM-E9WH-XXX

TABLE

EMEM-E9WH-120	120"	1.20"	-6.40
EMEM-E9WH-118	118"	1.18"	-6.30
EMEM-E9WH-108	108"	1.08"	-5.81
EMEM-E9WH-098	98"	.98"	-5.32
EMEM-E9WH-096	96"	.96"	-5.22
EMEM-E9WH-084	84"	.84"	-4.63
EMEM-E9WH-079	79"	.79"	-4.39
EMEM-E9WH-072	72"	.72"	-4.04
EMEM-E9WH-060	60"	.60"	-3.45
EMEM-E9WH-059	59"	.59"	-3.40
EMEM-E9WH-054	54"	.54"	-3.16
EMEM-E9WH-048	48"	.48"	-2.86
EMEM-E9WH-042	42"	.42"	-2.57
EMEM-E9WH-040	40"	.40"	-2.47
EMEM-E9WH-039	39"	.39"	-2.42
EMEM-E9WH-036	36"	.36"	-2.27
EMEM-E9WH-030	30"	.30"	-1.98
EMEM-E9WH-024	24"	.25"	-1.68
EMEM-E9WH-018	18"	.25"	-1.39
EMEM-E9WH-012	12"	.25"	-1.10
EMEM-E9WH-006	6"	.25"	-0.80
PART NUMBER	LENGTH	+ / -	LOSS dB

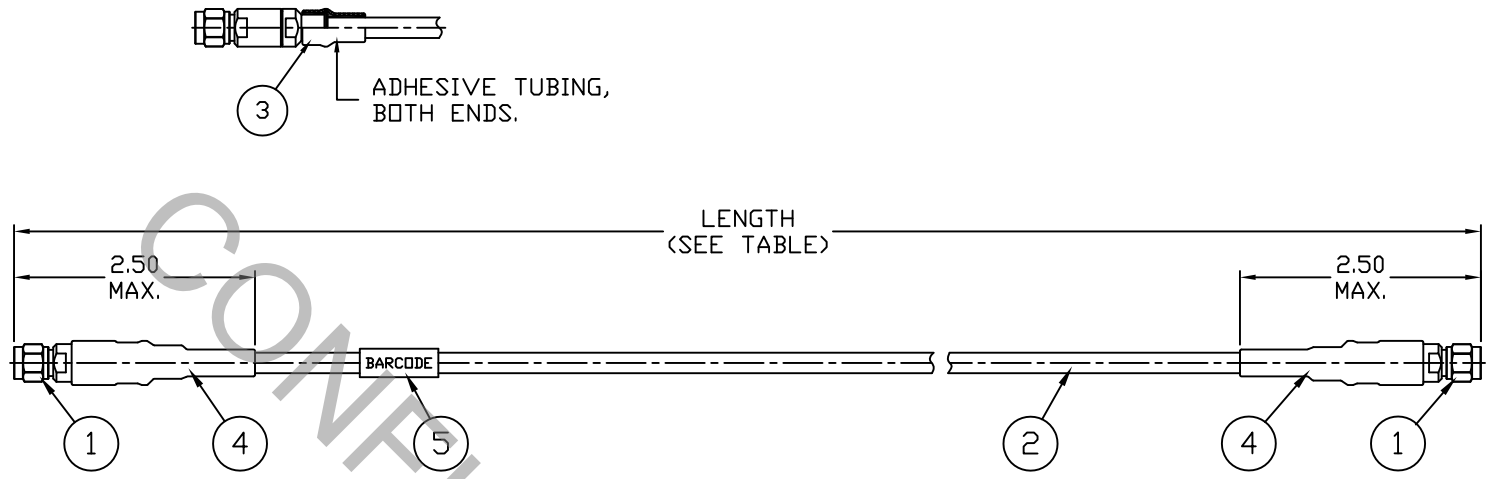

CONFIDENTIAL

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) TESTED 100%, DC - 32.0 GHz., VSWR 1.50:1, LOSS -X.XXdB (SEE TABLE).
3) TEST DATA SUPPLIED WITH ASSEMBLY.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	1	PDL-2	PANDUIT LABEL (BARCODE)
4	A/R	B2(3X)9/3	SUMITUBE, BLACK
3	A/R	M23053/4-303-0	TUBING, ADHESIVE
2	A/R	DF232	Ø.185 LOW LOSS CABLE
1	2	1200-232H-6240	2.4mm(P)STR, SO/CL, DF232

REV.	DCN NUMBER	DATE	APP.
AA	15-2261	9/4/15	DC

REV. 10/13

PACKAGE MARKING

CUST. CAGE: N/A
CUST. P/N: N/A
DYNA. CAGE: 6DZL5
DYNA. P/N: EMEM-E9WH-XXX
LOT NO.: XXXXXX
DATE CODE: XXXX

TOLERANCES

DECIMALS	FRACTIONAL	DEGREES
.X ±.250 .XX ±.125 .XXX ±.060	± 1/16"	X°±1°O' X°X' ±15'

A. DIMENSIONS ARE IN INCHES.

CUSTOMER

CATALOG ITEM

DRAWN: DC DATE: 9/1/15

APPROVED: DC DATE: 9/1/15

SCALE	CODE IDENT	SHEET
N/A	6DZL5	1 of 1

dynawave® CABLE INCORPORATED
Haverhill, MA. 01835

TITLE

DynaFlex® ASSEMBLY

DRAWING NO. EMEM-E9WH-XXX