INFORMATION CONTAINED WITHIN THIS DYNAWAVE CABLE INC. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF DYNAWAVE CABLE INC. HAVERHILL, MA. 01835

SPECIFICATION CONTROL DRAWING

DWG. NO. NMNR-A9PH-XXX

TABLE

NMNR-A9PH-120	120"	1.20"	-2.55
NMNR-A9PH-118	118"	1.18"	-2.51
NMNR-A9PH-108	108"	1.08"	-2.32
NMNR-A9PH-098	98"	.98"	-2.13
NMNR-A9PH-096	96"	.96"	-2.10
NMNR-A9PH-084	84"	.84"	-1.87
NMNR-A9PH-079	79"	.79"	-1.78
NMNR-A9PH-072	72"	.72"	-1.64
NMNR-A9PH-067	67"	.67"	-1.55
NMNR-A9PH-060	60"	.60"	-1.42
NMNR-A9PH-059	59"	.59"	-1.40
NMNR-A9PH-054	54"	.54"	-1.31
NMNR-A9PH-048	48"	.48"	-1.19
NMNR-A9PH-042	42"	.42"	-1.08
NMNR-A9PH-040	40"	.40"	-1.04
NMNR-A9PH-039	39"	.39"	-1.03
NMNR-A9PH-036	36"	.36"	-0.97
NMNR-A9PH-030	30"	.30"	-0.86
NMNR-A9PH-024	24"	.25"	-0.74
NMNR-A9PH-018	18"	.25"	-0.63
NMNR-A9PH-012	12"	.25"	-0.52
PART NUMBER	LENGTH	+ / -	LOSS dB

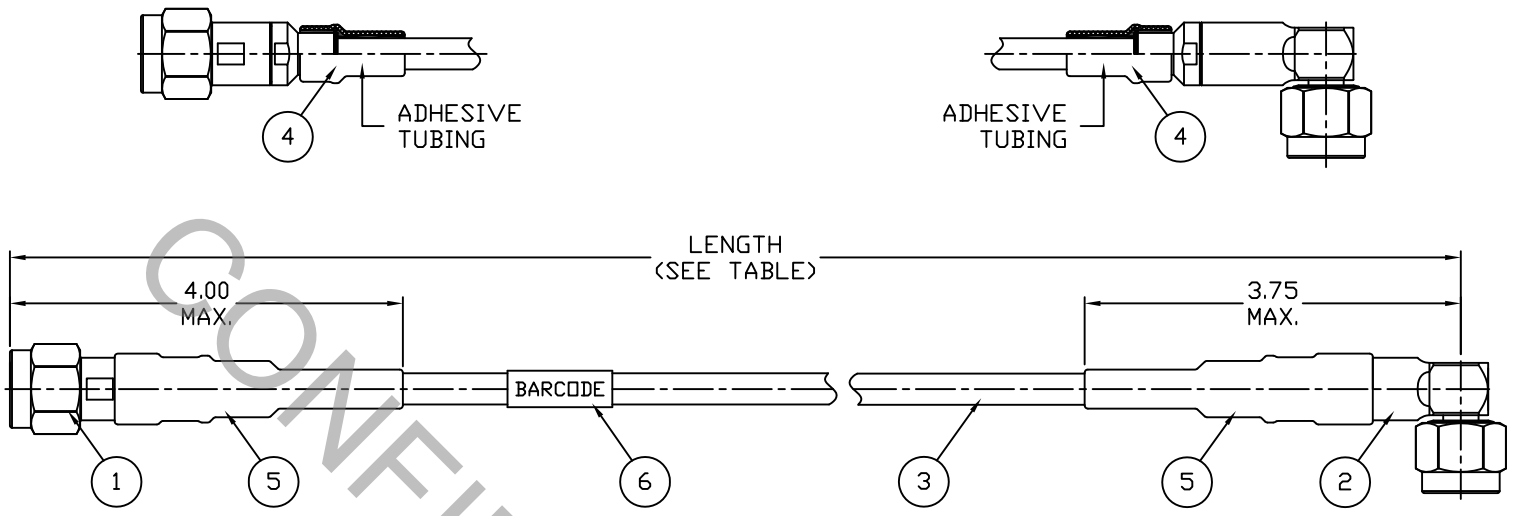

CONFIDENTIAL

ITEM	QTY	PART NUMBER	DESCRIPTION
6	1	PDL-2	PANDUIT LABEL (BARCODE)
5	A/R	B2(3X)18/9	SUMITUBE, BLACK
4	A/R	M23053/4-303-0	TUBING, ADHESIVE
3	A/R	DF218	Ø.295 LOW LOSS CABLE
2	1	7401-218H-6240	N(P)R/A, SO/CL, DF218
1	1	7400-218H-6240	N(P)STR, SO/CL, DF218

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) TESTED 100%, DC - 18.0 GHz., VSWR 1.35:1, LOSS -X.XXdB (SEE TABLE).
3) TEST DATA SUPPLIED WITH ASSEMBLY.

REV.	DCN NUMBER	DATE	APP.
AA	15-2694	11/20/15	DC

Ⓓ REV. 10/13

PACKAGE MARKING

CUST. CAGE: N/A
CUST. P/N: N/A
DYNA. CAGE: 6DZL5
DYNA. P/N: NMNR-A9PH-XXX
LOT NO.: XXXXXX
DATE CODE: XXXX

TOLERANCES

DECIMALS	FRACTIONAL	DEGREES
.X ±.250 .XX ±.125 .XXX ±.060	± 1/16"	X°±1°O' X°X' ±15'

A. DIMENSIONS ARE IN INCHES.

CUSTOMER

CATALOG ITEM

DRAWN: DC DATE: 9/3/15

APPROVED: DC DATE: 9/3/15

SCALE	CODE IDENT	SHEET
N/A	6DZL5	1 of 1

dynawave® CABLE INCORPORATED
Haverhill, MA. 01835

TITLE

DynaFlex® ASSEMBLY

DRAWING NO. NMNR-A9PH-XXX