INFORMATION CONTAINED WITHIN THIS DYNAWAVE CABLE INC. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF DYNAWAVE CABLE INC. HAVERHILL, MA. 01835

SPECIFICATION CONTROL DRAWING

DWG. NO. NMNR-B7PW-XXX

TABLE

NMNR-B7PW-120	120"	1.20"	-4.10
NMNR-B7PW-118	118"	1.18"	-4.03
NMNR-B7PW-108	108"	1.08"	-3.72
NMNR-B7PW-098	98"	.98"	-3.40
NMNR-B7PW-096	96"	.96"	-3.34
NMNR-B7PW-084	84"	.84"	-2.96
NMNR-B7PW-079	79"	.79"	-2.80
NMNR-B7PW-072	72"	.72"	-2.58
NMNR-B7PW-060	60"	.60"	-2.21
NMNR-B7PW-059	59"	.59"	-2.17
NMNR-B7PW-054	54"	.54"	-2.02
NMNR-B7PW-048	48"	.48"	-1.83
NMNR-B7PW-042	42"	.42"	-1.64
NMNR-B7PW-040	40"	.40"	-1.57
NMNR-B7PW-039	39"	.39"	-1.54
NMNR-B7PW-036	36"	.36"	-1.45
NMNR-B7PW-030	30"	.30"	-1.26
NMNR-B7PW-024	24"	.25"	-1.07
NMNR-B7PW-018	18"	.25"	-0.88
NMNR-B7PW-012	12"	.25"	-0.69
PART NUMBER	LENGTH	+ / -	LOSS dB

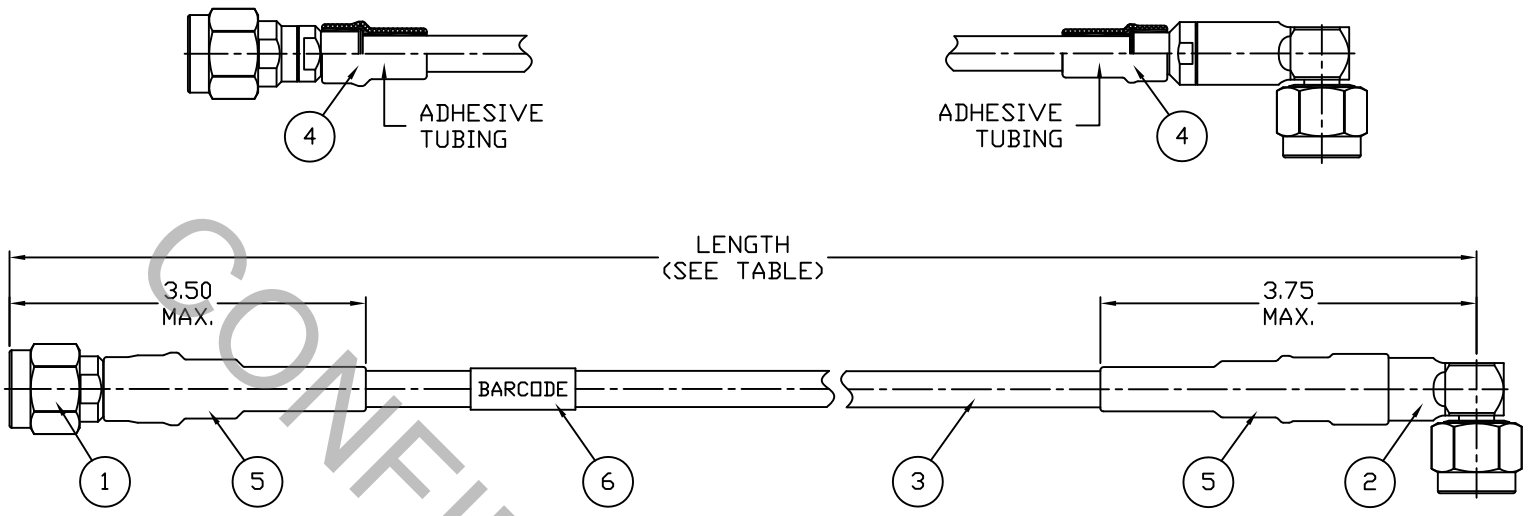

CONFIDENTIAL

ITEM	QTY	PART NUMBER	DESCRIPTION
6	1	PDL-2	PANDUIT LABEL (BARCODE)
5	A/R	B2(3X)18/9	SUMITUBE, BLACK
4	A/R	M23053/4-303-0	TUBING, ADHESIVE
3	A/R	DF418W	Ø.345 LOW LOSS CABLE
2	1	7401-418W-6200	N(P)R/A, SO/CL, DF418W
1	1	7400-418W-6200	N(P)STR, SO/CL, DF418W

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) TESTED 100%, DC - 18.0 GHz., VSWR 1.35:1, LOSS -X.XXdB (SEE TABLE).
3) TEST DATA SUPPLIED WITH ASSEMBLY.

REV.	DCN NUMBER	DATE	APP.
AA	15-2547	10/29/15	DC

Ⓓ REV. 10/13

PACKAGE MARKING

CUST. CAGE: N/A
CUST. P/N: N/A
DYNA. CAGE: 6DZL5
DYNA. P/N: NMNR-B7PW-XXX
LOT NO.: XXXXXX
DATE CODE: XXXX

TOLERANCES

DECIMALS	FRACTIONAL	DEGREES
.X ±.250 .XX ±.125 .XXX ±.060	± 1/16"	X°±1°O' X°X' ±15'

A. DIMENSIONS ARE IN INCHES.

CUSTOMER

CATALOG ITEM

DRAWN: DC DATE: 9/17/15

APPROVED: DC DATE: 9/17/15

SCALE	CODE IDENT	SHEET
N/A	6DZL5	1 of 1

dynawave® CABLE INCORPORATED
Haverhill, MA. 01835

TITLE

DynaFlex® ASSEMBLY

DRAWING NO. NMNR-B7PW-XXX