SPECIFICATION CONTROL DRAWING

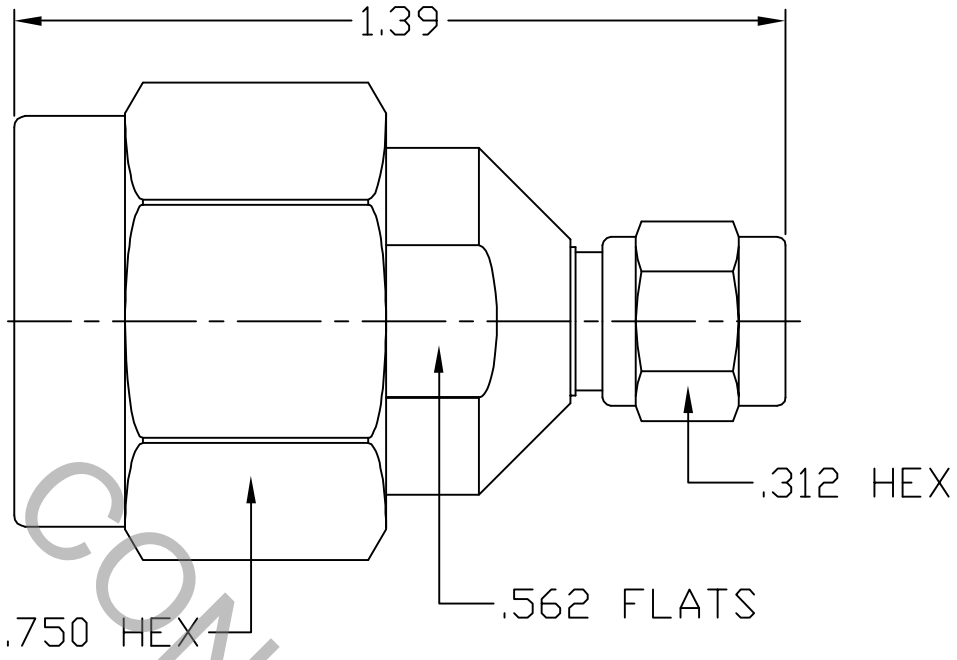

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348
Fig. 304.1 (N PLUG) WITH SOLID OUTER & Fig. 310.1 (SMA PLUG).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.07 + .007 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	410
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,250
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.
AA	05-1781	8/8/05	DC
AB	07-1478	5/2/07	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	± 1/64	X °±1°0' X ° X' ±15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN DC DATE 8/8/05

APPROVED DC DATE 8/8/05

TITLE
N PLUG TO SMA PLUG ADAPTER

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 1100-7498-6251

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX. AXIAL FORCE	6.0 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	N/A
● WITHDRAWAL (MIN. OUNCES)	N/A
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	N, 30 – 35 IN. LBS. SMA, 7 – 10 IN. LBS.

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (310 VRMS)

5. MATERIAL

BODIES & COUPLING NUTS	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACT & RETAINING RINGS	BERYLLIUM COPPER PER ASTM–B–196–90, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATORS	TEFLON PER ASTM–D–1710.
GASKETS	SILICONE RUBBER PER ZZ–R–765.

6. FINISH

BODIES & COUPLING NUTS	PASSIVATE PER AMS QQ–P–35, TYPE 2.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 2.5 (.000100 MIN. THK.) OVER NICKEL per QQ–N–290 (.000050 MIN. THK.) OVER COPPER per MIL–C–14550 (.000010 MIN. THK.)
INSULATORS, RETAINING RINGS & GASKETS	N/A