SPECIFICATION CONTROL DRAWING

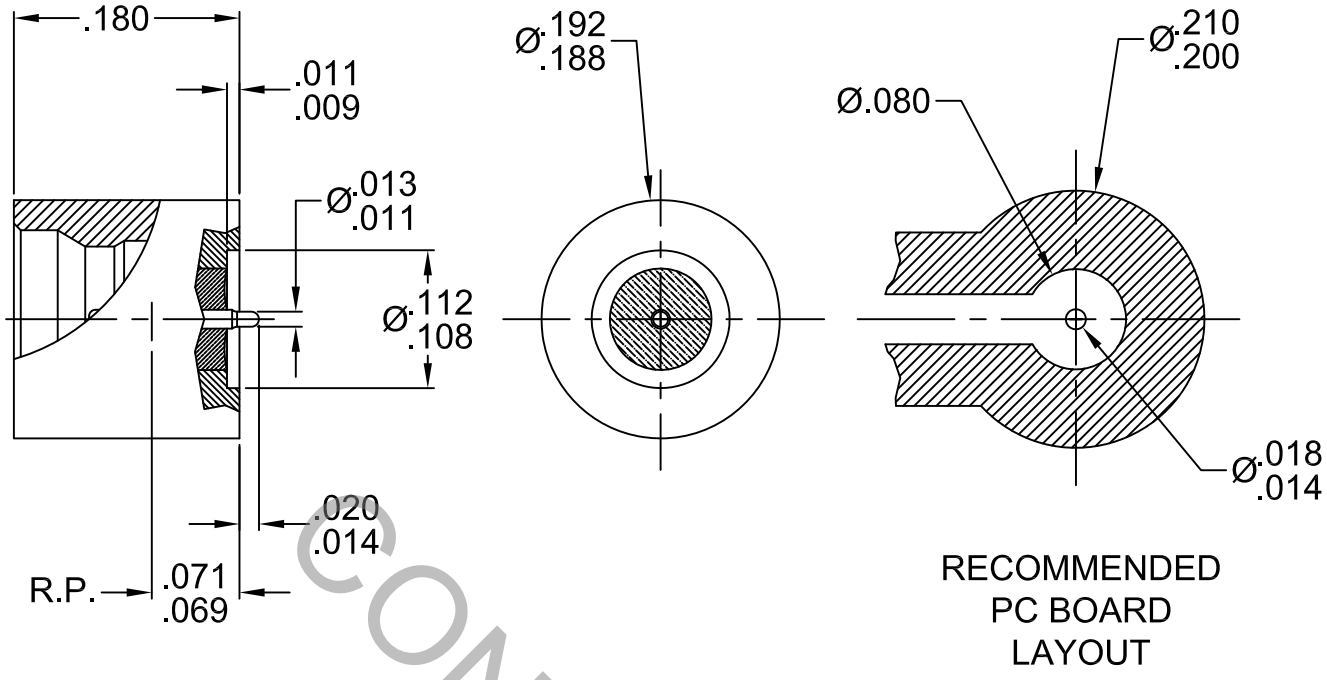

RECOMMENDED
PC BOARD
LAYOUT

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS PER MIL-STD-348A, Fig. 326.2 (SMP MALE)

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz.
VSWR (MAX.) ❋	1.10 + .005 x FGHz.
INSERTION LOSS (dB MAX.) ❋	.040 dB x $\sqrt{\text{FGHz}}$.
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	335
RF LEAKAGE (MIN. dB DOWN)	N/A
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65 ° c TO +165 ° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	4.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	13-1232	2/14/13	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	±1/64	X °±1 °0' X ° X' ±15'

SURFACE ROUGHNESS 63 √ MIL-STD 10.

dynawave INCORPORATED
HAVERHILL, MA. 01835

DRAWN TS DATE 2/14/13

APPROVED DC DATE 2/14/13

TITLE SMP, PLUG
(FULL DETENT)
HERMETICALLY SEALED SHROUD
SOLDER MOUNT

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 2140-0434-6401

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT

- MIN. AXIAL FORCE ——— 4.5 LBS.
- MIN. RADIAL TORQUE ——— 2.5 IN. OZ.

CONNECTOR ENGAGEMENT FORCES

- INSERTION (MAX. OUNCES) ——— 15.0 LBS.
- WITHDRAWAL (MIN. OUNCES) ——— 5.0 LBS.

CONNECTOR DURABILITY (MIN. MATING) ——— N/A

4. ENVIRONMENTAL

TEMPERATURE CYCLING ——— MIL–STD–202, METHOD 102, COND. C (–65 ° c TO + 200 °c)
SHOCK ——— MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION ——— MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE ——— MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION ——— MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE) ——— MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)
HERMETICITY ——— 1 x 10^{-8} cc/SEC.

CONFIDENTIAL

5. MATERIAL

CONNECTOR BODY ——— STAINLESS STEEL PER ASTM A 582, TYPE 303, COND. A.
GLASS PIN ——— KOVAR PER MIL–I–23011
GLASS ——— CORNING 7070

6. FINISH

CONNECTOR BODY AND GLASS PIN ——— GOLD PER ASTM B 488, TYPE 1, CODE C, CLASS 0.70
(.000030 MIN. THK.) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1
(.000050 MIN. THK.) OVER COPPER PER AMS 2418 (.000010 MIN. THK.)

GLASS ——— N/A