SPECIFICATION CONTROL DRAWING

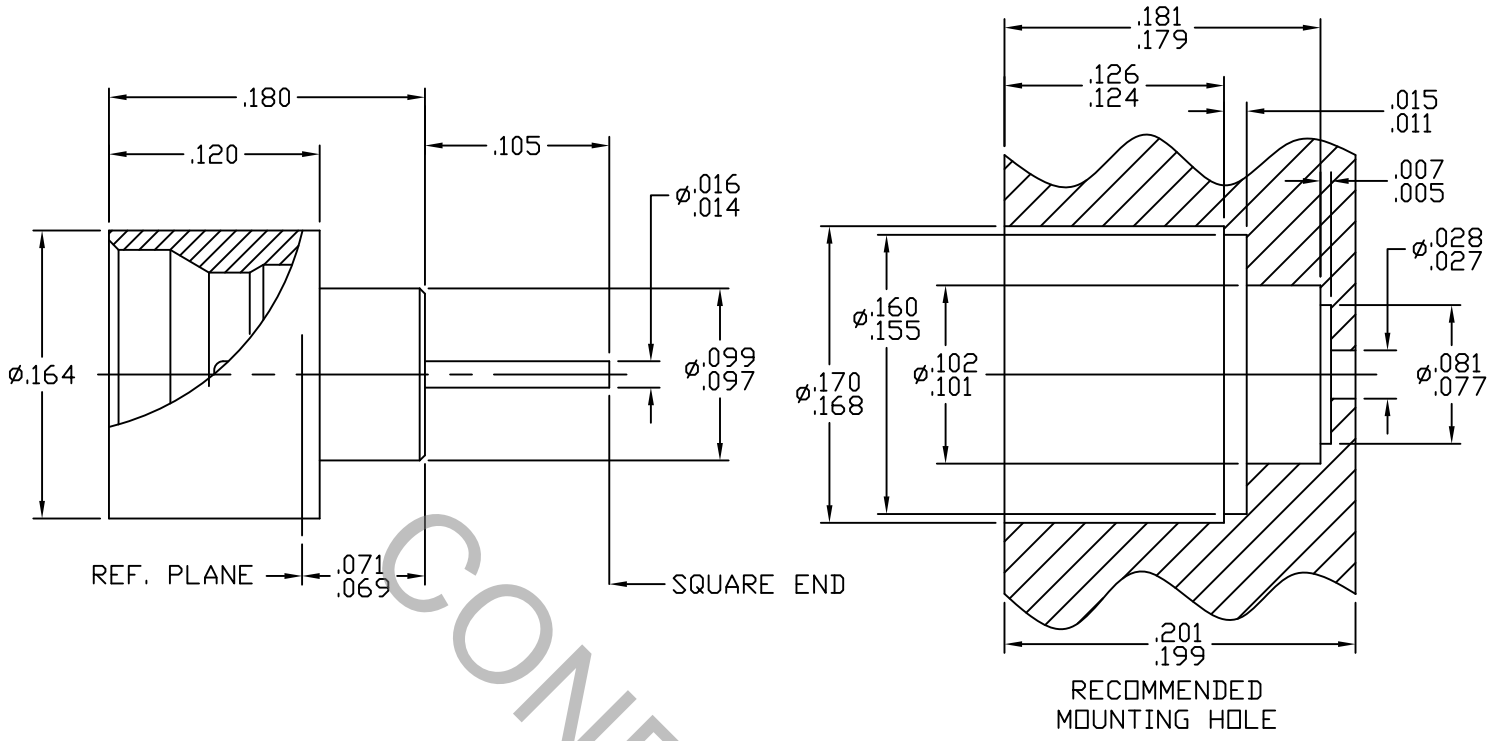

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS PER MIL-STD-348A, Fig. 326.2 (SMP, MALE, FULL DETENT)

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 39.0 GHz.
VSWR (MAX.) ❋	1.02 + .003 x FGHz.
INSERTION LOSS (dB MAX.) ❋	.045 dB x $\sqrt{\text{FGHz.}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	N/A
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65 ° c TO +165 ° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	10,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	10.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	17-1721	6/5/17	TS

DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS: .X ±.030, .XX ±.010, .XXX ±.005
FRACTIONAL: ±1/64
ANGULAR: X °±1 °0', X ° X' ± 15'
SURFACE ROUGHNESS 63 √ MIL-STD 10.

dynawave INCORPORATED
HAVERHILL, MA. 01835

DRAWN TS DATE 6/5/17

APPROVED DC DATE 6/5/17

TITLE SMP, PLUG (FULL DETENT) HERMETICALLY SEALED SHROUD SOLDER MOUNT

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 2140-0435-7406

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT

- MIN. AXIAL FORCE ——— 4.5 LBS.
- MIN. RADIAL TORQUE ——— 2.5 IN. OZ.

CONNECTOR ENGAGEMENT FORCES

- INSERTION (MAX. OUNCES) ——— 15.0
- WITHDRAWAL (MIN. OUNCES) ——— 5.0 LBS.

CONNECTOR DURABILITY (MIN. MATING) ——— 100

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65 ° c TO + 200 °c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)
HERMETICITY	1×10^{-8} cc/SEC.

CONFIDENTIAL

5. MATERIAL

CONNECTOR BODY AND GLASS PIN	KOVAR PER MIL–I–23011
GLASS	CORNING 7070

6. FINISH

CONNECTOR BODY AND GLASS PIN	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.25 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000150 MIN. THK.) OVER NICKEL (WOODS OR WATTS) (.000010 MIN. THK.)
GLASS	N/A