SPECIFICATION CONTROL DRAWING

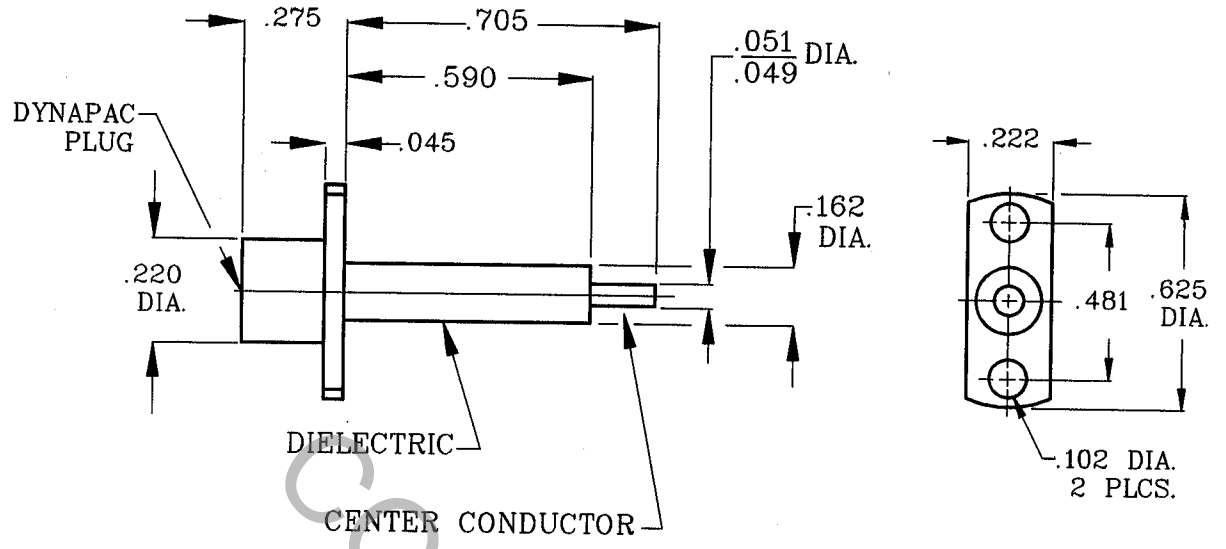

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS PER DYNAWAVE SPECIFICATION MD-21.

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz.
VSWR (MAX.) ✱	1.07 + .010 x FGHz.
INSERTION LOSS (dB MAX.) ✱	.045 dB x $\sqrt{FGHz}$.
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	100 dB − FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65° c TO +150° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	500
INSULATION RESISTANCE (MIN. MEGOHMS)	2,500
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	3.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

✱ TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.
–	1032	11/93	M.B.
A	1038	12/93	M.B.

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1° 0' X° X± 15'

SURFACE ROUGHNESS 63 √ MIL-STD 10.

dynawave INCORPORATED
GEORGETOWN MA. 01833

DRAWN M.B. DATE 11/93

APPROVED DGG DATE 11/93

TITLE
DYNAPAC, PLUG
2 HOLE MOUNT
STRAIGHT TERMINAL

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 2152-0032-6249

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT

- MIN. AXIAL FORCE — 5.0 LBS.
- MIN. RADIAL TORQUE — N/A

CONNECTOR ENGAGEMENT FORCES

- INSERTION (MAX. OUNCES) — N/A
- WITHDRAWAL (MIN. OUNCES) — N/A

CONNECTOR DURABILITY (MIN. MATING) — 500

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65 ° c TO + 165 °c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (125 VRMS)

CONFIDENTIAL

5. MATERIAL

CONNECTOR BODY	STAINLESS STEEL PER ASTM A 582, TYPE 303, COND. A.
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, COPPER ALLOY UNS C17300.
INSULATOR	TEFLON PER ASTM D 4894–91

6. FINISH

CONNECTOR BODY	PASSIVATE PER QQ–P–35C, TYPE V1.
CENTER CONTACT	GOLD PER MIL–G–45204, TYPE II, GRADE C, CLASS 2 (.0001 MIN.) OVER NICKEL PER QQ–N–290, CLASS 1 (.00010 MIN.) OVER COPPER PER MIL–C–14550 (.000010 MIN.)
INSULATOR	N/A