SPECIFICATION CONTROL DRAWING

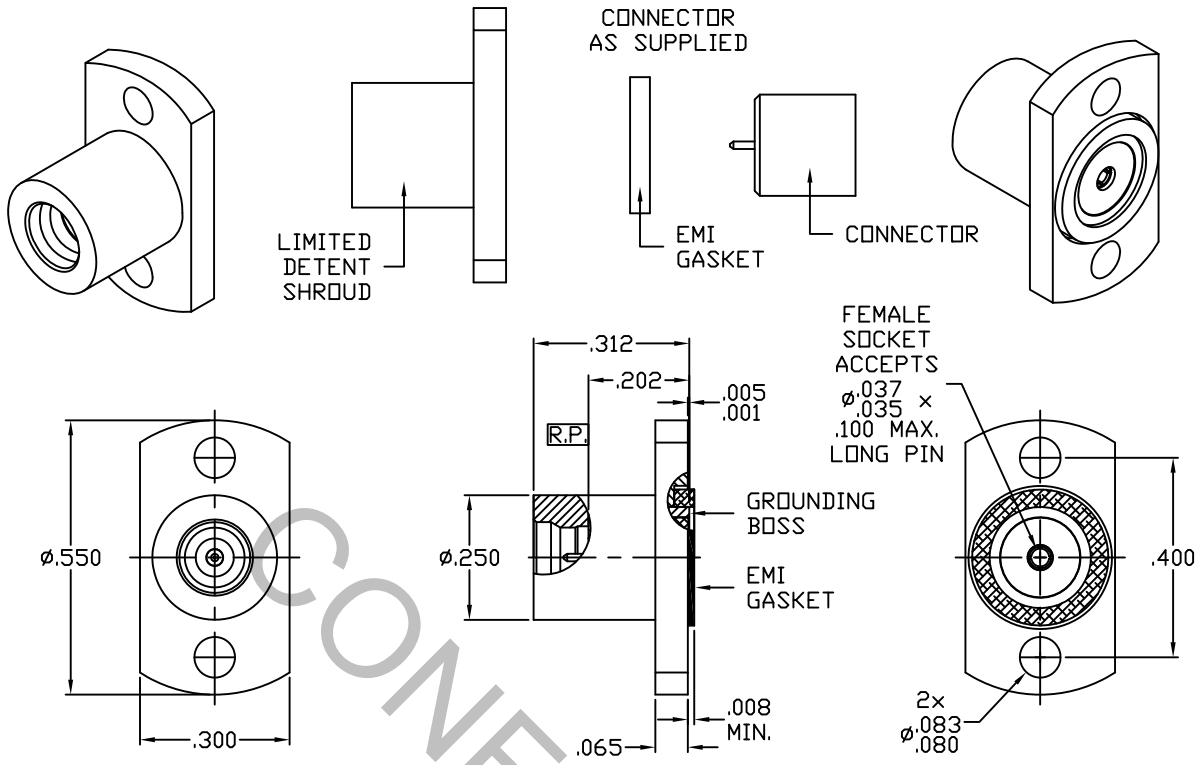

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 326.3 (SMP MALE, LIMITED DETENT).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 24.0 GHz
VSWR (MAX.) ❋	1.10 + .010 x FGHz
INSERTION LOSS (dB MAX.) ❋	.10 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	167
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	17-2153	9/28/17	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1°0' X°X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN DC DATE 9/28/17

APPROVED DC DATE 9/28/17

TITLE SMP MALE (LD), 2 HOLE FLANGE, FIELD REPLACEABLE, ACCEPTS ø.036 PIN

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 2172-0785-6236

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT

- MIN. AXIAL FORCE — 4.5 LBS.
- MIN. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) — INTERFACE N/A, REAR 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE N/A, REAR 1.0

CONNECTOR AXIAL FORCES

- INSERTION (MAX. POUNDS) — 10.0
- WITHDRAWAL (MIN. POUNDS) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 107, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (125 VRMS)

5. MATERIAL

BODY & BUSHING	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACT	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710, TYPE 1, GRADE 1, CLASS B.
EMI GASKET	SILVER PLATED ALUMINUM IN SILICONE PER MIL–G–83528, TYPE B.

6. FINISH

BODY & BUSHING	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATOR & EMI GASKET	N/A