SPECIFICATION CONTROL DRAWING

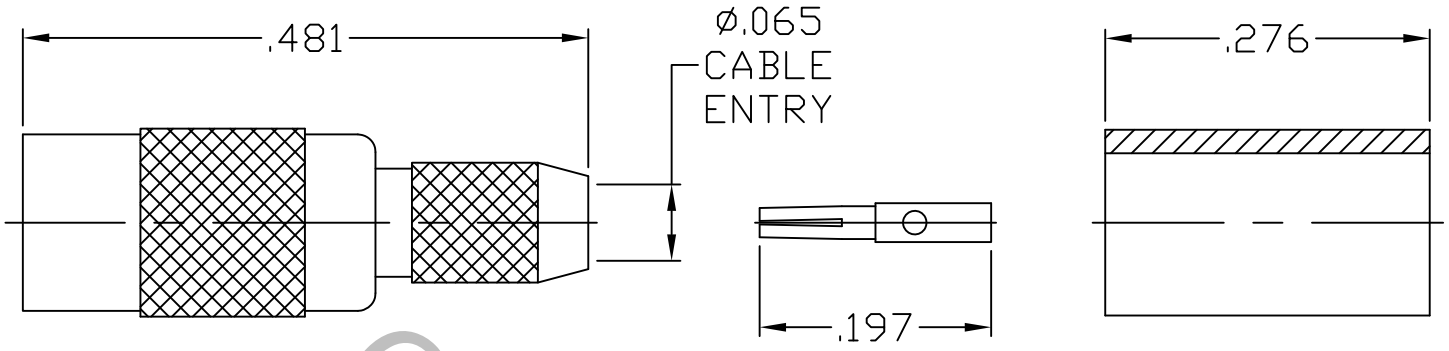

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per CECC 22000 (MMCX JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 6.0 GHz
VSWR (MAX.) ❋	1.15 + .015 x FGHz
INSERTION LOSS (dB MAX.) ❋	.10 dB x √FGHz
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	170
RF LEAKAGE (MIN. dB DOWN)	N/A
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	5.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.5

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	16-1748	6/20/16	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 6/20/16

APPROVED DC DATE 6/20/16

TITLE
MMCX JACK
STRAIGHT CRIMP
RD-316

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 2500-1830-2400

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX. AXIAL FORCE — 4.0 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — INTERFACE 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) — 3.4

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — N/A

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (125 VRMS)

5. MATERIAL

BODY	BRASS PER ASTM–B16, TEMPER H02, ALLOY C36000.
CONTACT	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
CRIMP SLEEVE	COPPER

6. FINISH

BODY & CRIMP SLEEVE	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS .075 (.000003 MIN. THK.) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS 2418 (.000010 MIN. THK.)
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS .075 (.000003 MIN. THK.) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS 2418 (.000010 MIN. THK.)
INSULATOR	N/A