SPECIFICATION CONTROL DRAWING

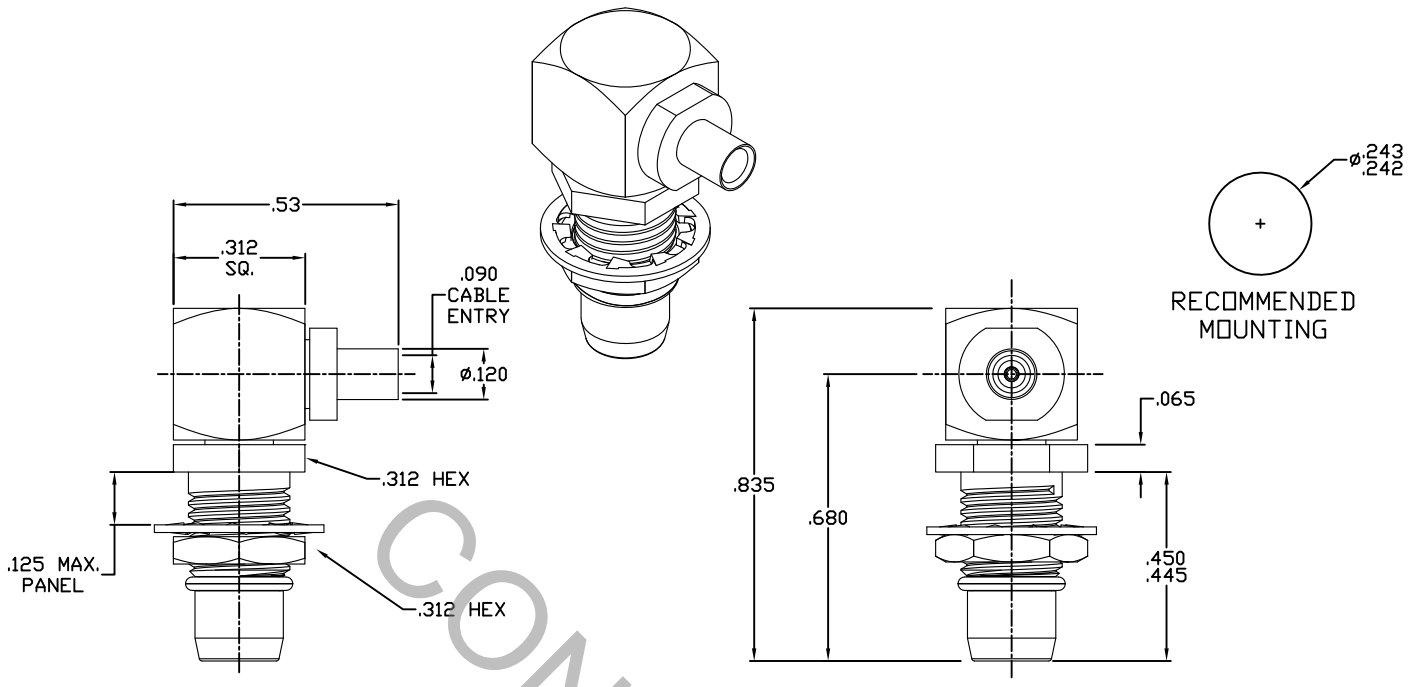

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 321.1 (BMA PLUG).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.07 + .010 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	13-1118	1/24/13	TS
AB	13-2628	11/27/13	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 1/24/13

APPROVED DC DATE 1/24/13

TITLE BMA PLUG
R/A BULKHEAD
DIRECT SOLDER TO
ø.085 SEMI-RIGID CABLE

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 2811-8521-6201

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX. AXIAL FORCE	4.5 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	N/A
● WITHDRAWAL (MIN. OUNCES)	N/A
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MOUNTING TORQUE	18 – 22 IN. LBS.

4. ENVIRONMENTAL

THERMAL SHOCK	MIL–STD–202, METHOD 107, COND. B (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

CONFIDENTIAL

5. MATERIAL

BODIES & HEX NUT	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACTS	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATORS	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
O–RING	NITRILE (BUNA N) PER MIL–P–25732.
LOCKWASHER	STAINLESS STEEL TYPE 410.

6. FINISH

BODIES, HEX NUT & LOCKWASHER	PASSIVATE PER AMS 2700, TYPE 2, CLASS 4.
CABLE ENTRY BODY	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1 (.000150 MIN. THK.) OVER NICKEL (WOODS OR WATTS) (.000010 MIN. THK.)
CONTACTS	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS 2418, (.000010 MIN. THK.)
INSULATORS & O–RING	N/A