SPECIFICATION CONTROL DRAWING

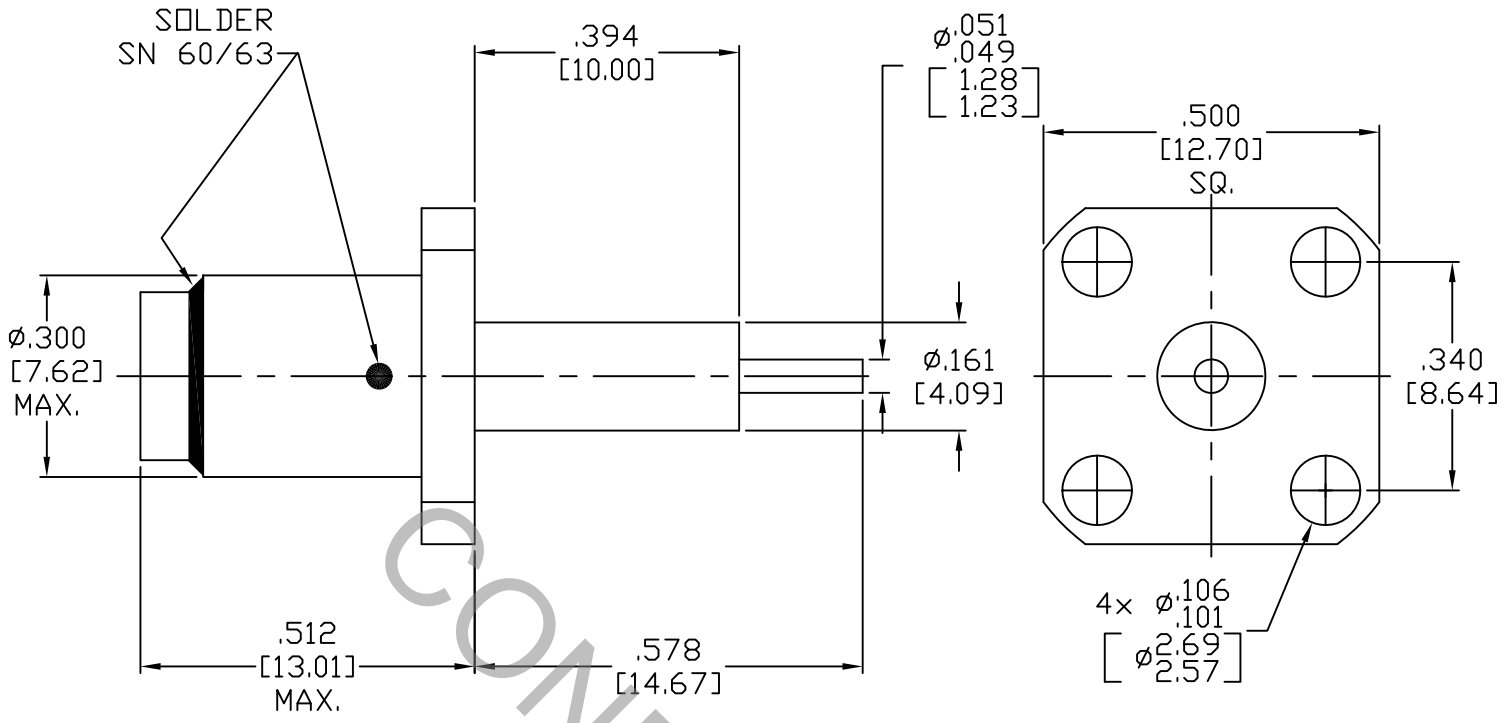

CONFIDENTIAL

1. MATING N/A

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 4.0 GHz.
VSWR (MAX.)	DC – 2.0 GHz., 1.05 2.0 – 4.0 GHz., 1.10
NOMINAL IMPEDANCE (OHMS)	50
AVERAGE POWER (MAX. WATTS)	2.0

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	16-1935	8/9/16	TS
AB	17-1913	7/27/17	TS

DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS: .X ±.030, .XX ±.010, .XXX ±.005
FRACTIONAL: ±1/64
ANGULAR: X° ±1°0', X.X° ±15'
SURFACE ROUGHNESS 63 √ MIL-STD 10.

dynawave INCORPORATED
HAVERHILL MA. 01835

DRAWN TS DATE 8/9/16

APPROVED DC DATE 8/9/16

TITLE: 4 HOLE FLANGE 50 ohm TERMINATION

CODE IDENT. 2J899

SHEET 1 OF 1

DWG. NO. 5454-1405-6251