SPECIFICATION CONTROL DRAWING

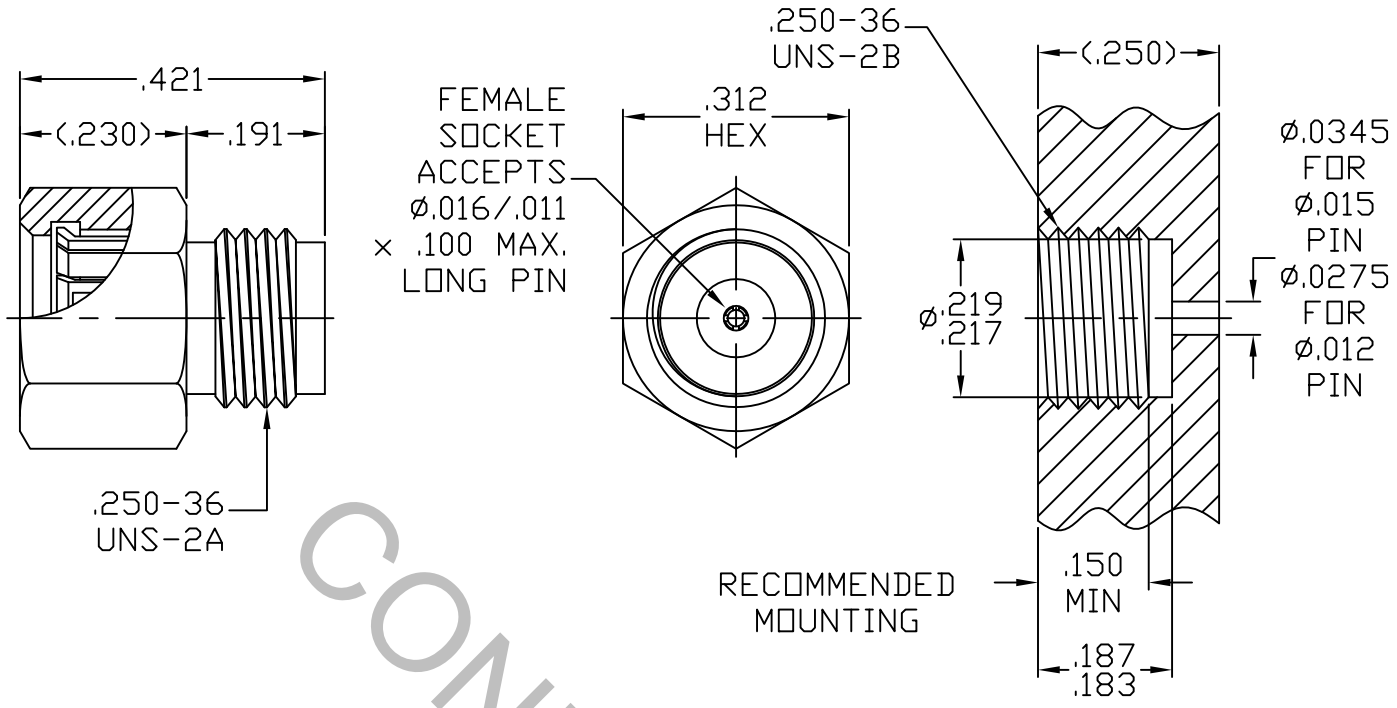

CONFIDENTIAL

1. MATING

INTERFACE DIMENSIONS PER MIL-STD-348A Fig. 321.2 (BMA, JACK)

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 26.5 GHz
VSWR (MAX.) ❋	SEE SHEET 3
INSERTION LOSS (dB MAX.)	
• BMA INTERFACE GAP (.000 to .015)	.035 dB x $\sqrt{FGHz}$
• BMA INTERFACE GAP (.016 to .030)	.050 dB x $\sqrt{FGHz}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	
• BMA INTERFACE BOTTOMED (.000 GAP)	−100 dB − FGHz
• BMA INTERFACE GAP (.001 to .015)	−90 dB − FGHz
• BMA INTERFACE GAP (.016 to .030)	−75 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	07-1105	1/30/07	DC
AB	12-1113	2/2/12	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1° 0', X° X ± 15'

SURFACE ROUGHNESS 63 √ MIL-STD-10.

dynawave INCORPORATED
HAVERHILL, MA. 01835

DRAWN DC DATE 1/30/07

APPROVED DC DATE 1/30/07

TITLE
BMA JACK,
SCREW-IN
MIC. PACKAGE

CODE IDENT. 2J899

SHEET 1 of 3

DWG. NO. 6730-0081-6215

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MIN. AXIAL FORCE — 4.5 LBS.
- MIN. RADIAL TORQUE — N/A

DYNAMATE ENGAGEMENT FORCES
- INSERTION (MAX. OUNCES) — INTERFACE 32.0, REAR 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE 2.0, REAR 1.0

DYNAMATE DURABILITY (MIN. MATING) — 1000

RECOMMENDED MATING FORCES
- MIC PACKAGE (TORQUE) — 20–24 IN. LBS.
- PLUG CONNECTOR – INSERTION FORCE — 3.0 LBS. MAXIMUM

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65 ° c TO + 165 °c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

CONNECTOR BODY	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A.
CENTER CONTACT AND SPRING FINGERS	BERYLLIUM COPPER PER ASTM B 196/B, 196M–03, COPPER ALLOY No. UNS 17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.

6. FINISH

CONNECTOR BODY	PASSIVATE PER AMS 2700, TYPE 2, CLASS 4.
CENTER CONTACT AND SPRING FINGERS	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THICKNESS) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1 (.000050 MIN. THICKNESS) OVER COPPER PER AMS 2418 (.000010 MIN. THK.)
INSULATOR	N/A

SPECIFICATION CONTROL DRAWING

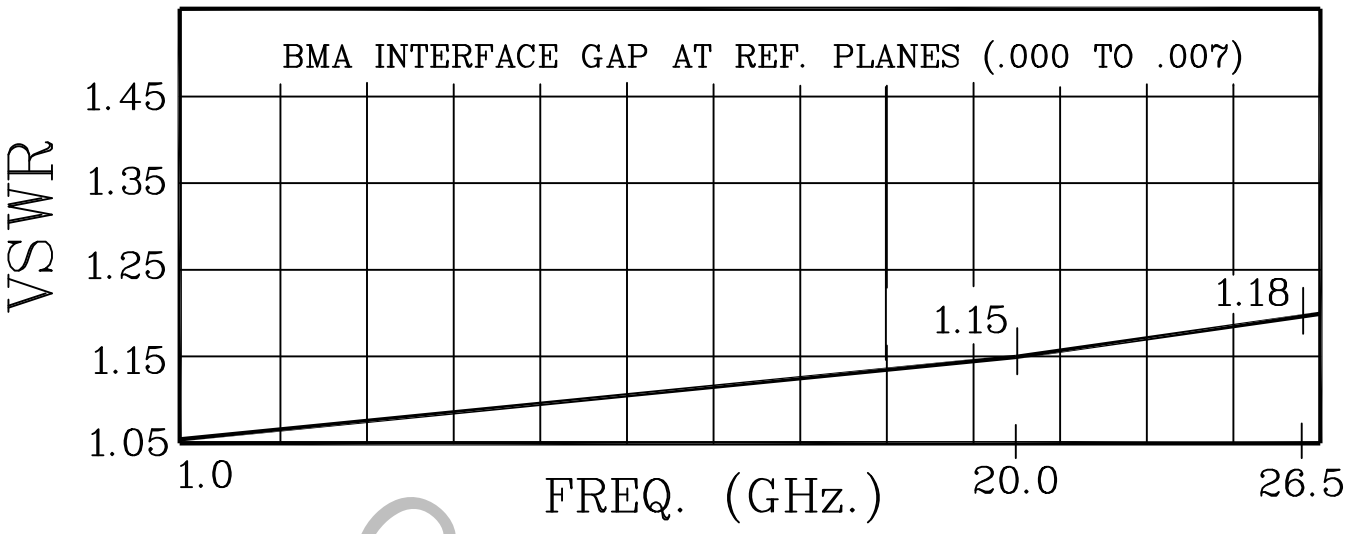

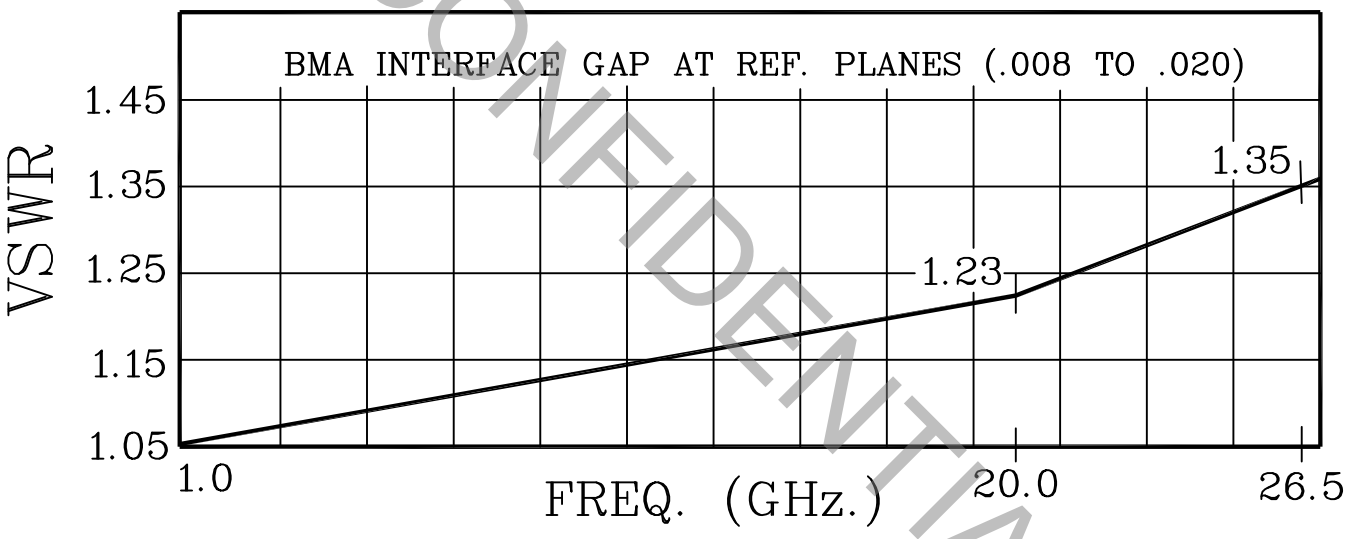

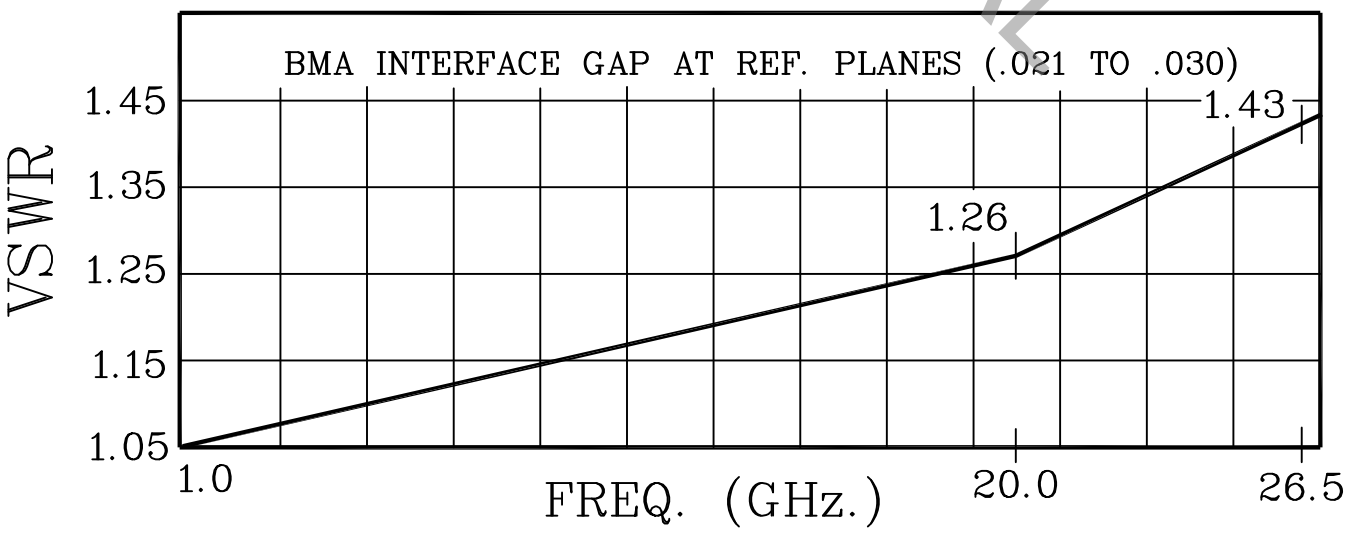

CONFIDENTIAL

dynawave INCORPORATED	SHEET 3 OF 3	DWG. NO. 6730-0081-6215	REV. AB