SPECIFICATION CONTROL DRAWING

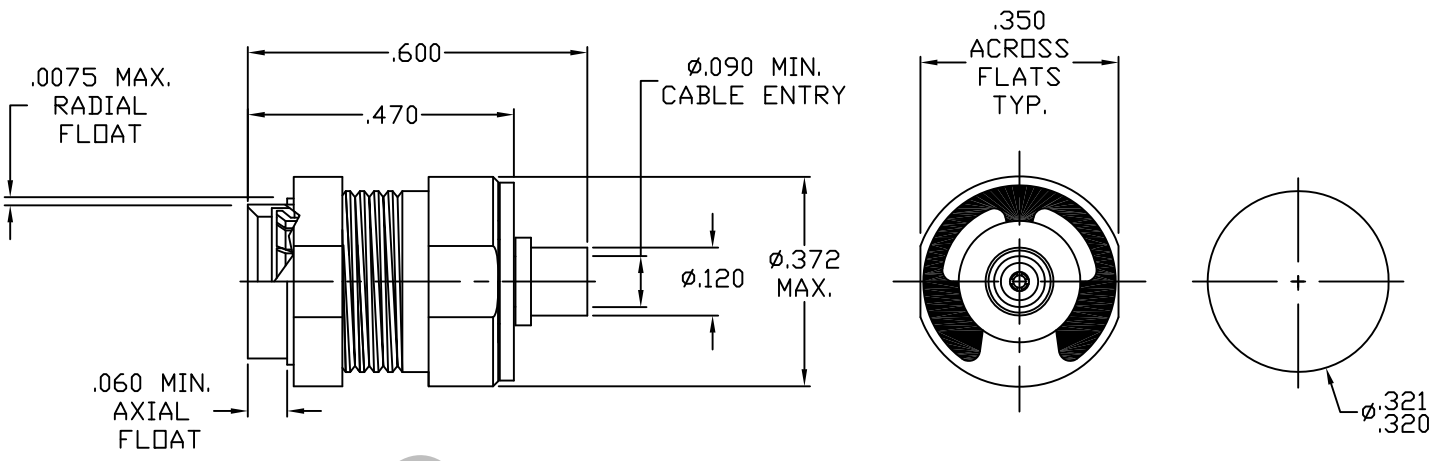

RECOMMENDED
MOUNTING HOLE

CONFIDENTIAL

1. MATING

INTERFACE DIMENSIONS PER MIL-STD-348 Fig. 321.2 (BMA JACK)

2. ELECTRICAL

FREQUENCY RANGE MHz	DC TO 26.5 GHz.
VSWR (MAX.) ❋	SEE SHEET 3
INSERTION LOSS: (dB MAX.)	
• INTERFACE GAP (.000 TO .015)	.040 dB x $\sqrt{\text{FGHz.}}$
• INTERFACE GAP (.000 TO .015)	.060 dB x $\sqrt{\text{FGHz.}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	
• DYNAMATE INTERFACE BOTTOMED (.000 GAP)	-100 dB - FGHz
• DYNAMATE INTERFACE GAP (.001 TO .015)	-90 dB - FGHz
• DYNAMATE INTERFACE GAP (.016 TO .030)	-75 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65° c TO + 165° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	10,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	10-1044	1/15/10	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030	± 1/64	X° ± 1° 0'
.XX ± .010		X° X' ± 15'
.XXX ± .005		

dynawave INCORPORATED
HAVERHILL, MA. 01835

DRAWN TS DATE 1/15/10

APPROVED DC DATE 1/15/10

TITLE
BMA JACK, BULKHEAD
FLOAT REAR MOUNT
TO Ø.085 S.R. CABLE

CODE IDENT. 2J899

SHEET 1 OF 3

DWG. NO. 6760-8521-6261

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE — 4.0 LBS.
- MIN. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) — INTERFACE 32.0, REAR 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE 2.0, REAR 1.0

CONNECTOR DURABILITY (MIN. CYCLES) — 1,000

RECOMMENDED MATING TORQUE — 8.0 TO 10.0 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL-STD-202, METHOD 102, COND. C (-65° c TO + 200° c)
SHOCK	MIL-STD-202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL-STD-202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, LESS STEP 7b
CORROSION	MIL-STD-202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

CONFIDENTIAL

5. MATERIAL

CONNECTOR BODY & OUTER BODY	STAINLESS STEEL PER ASTM-A-582, TYPE 303, COND. A
CENTER CONTACT & SPRING FINGERS	BERYLLIUM COPPER PER ASTM-B/196M, COPPER ALLOY UNS-C-17300, TEMPER TD04
INSULATOR	TEFLON PER ASTM D-1710-02, TYPE 1, GRADE 1, CLASS B
CENTER CONTACT HOOD	BRASS PER ASTM B 16, TEMPER H02, ALLOY C36000
RETAINING RING	SPRING STEEL PER SAE 1060-1090

6. FINISH

CONNECTOR BODY	GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 1.25 (.000050 MIN. THK.) OVER NICKEL PER QQ-N-290 (.000150 MIN. THK.) OVER WOODS OR WATTS NICKEL (.000010 MIN. THK.)
OUTER BODY	PASSIVATE PER AMS QQ-P-35, TYPE 2
CENTER CONTACT ASSY & SPRING FINGERS	GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 2.5 (.000100 MIN. THK) OVER NICKEL PER QQ-N-290 (.000050 MIN. THK.) OVER COPPER PER MIL-C-14550 (.000010 MIN. THK.)
RETAINING RING	CORROSION RETARDANT PHOSPHATE COATING PER MIL-P-16232D, TYPE Z
INSULATOR	N/A

SPECIFICATION CONTROL DRAWING

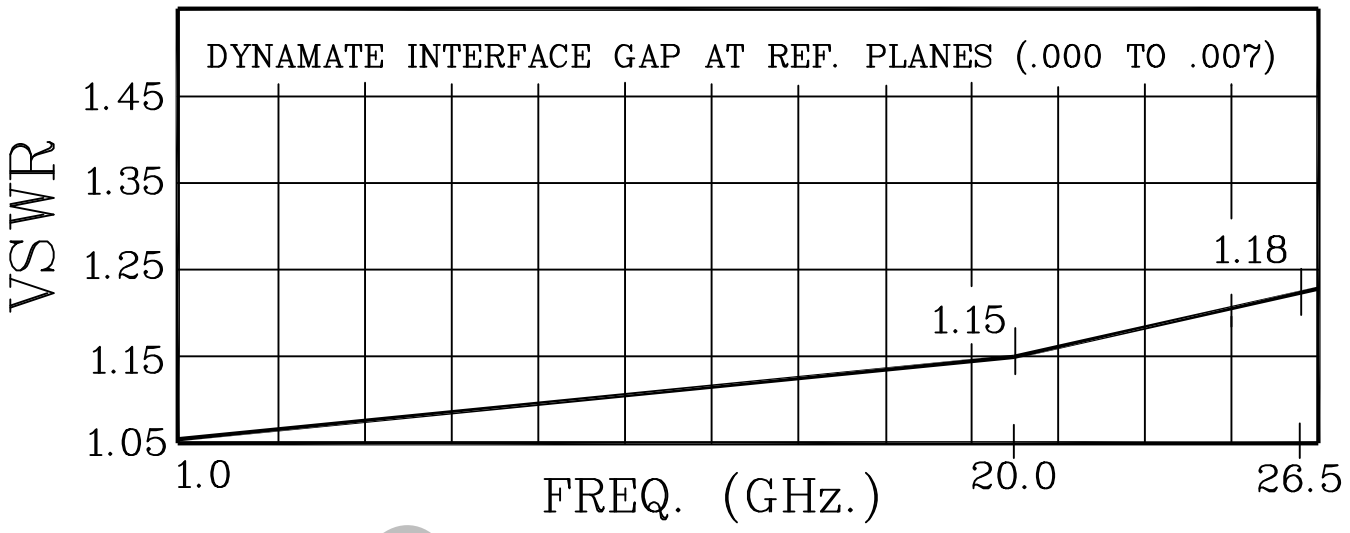

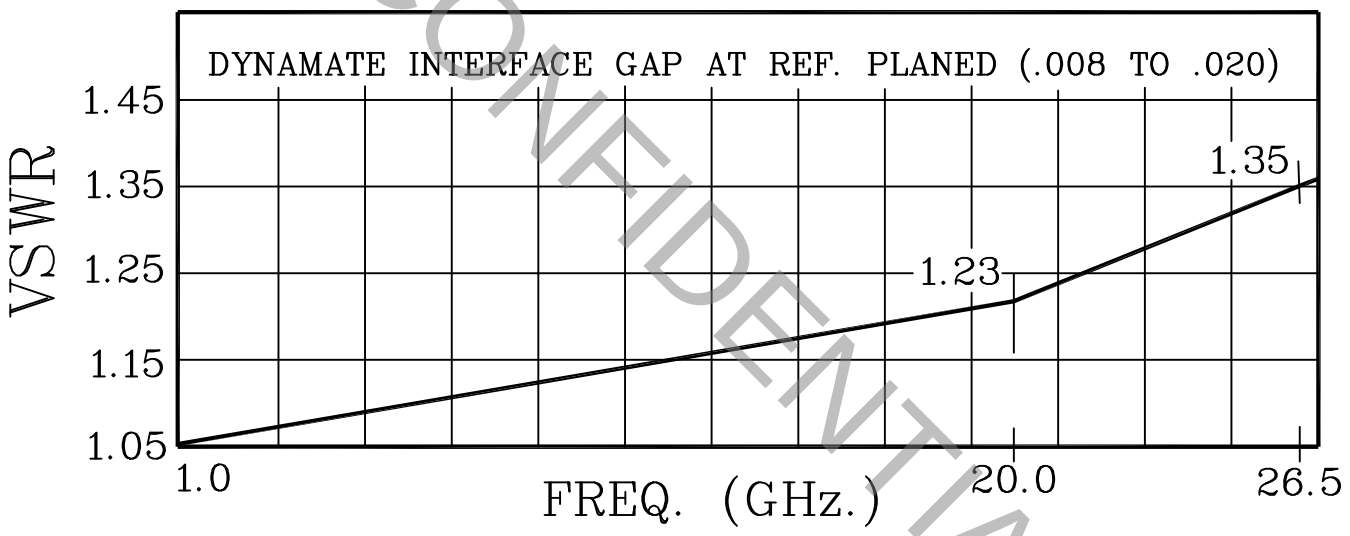

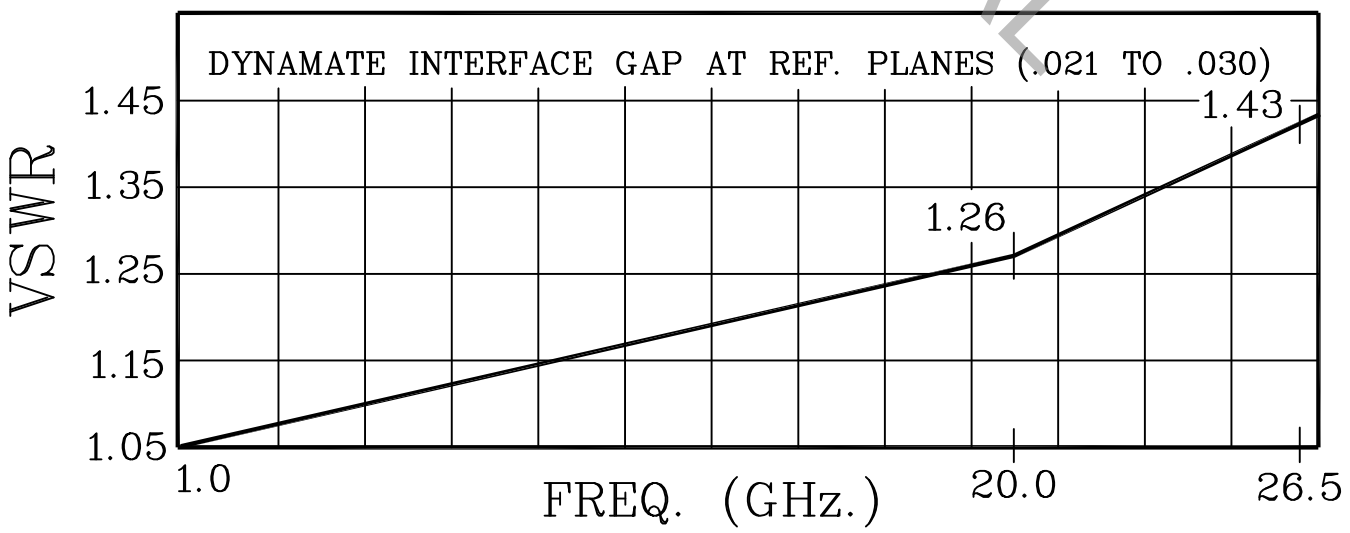

CONFIDENTIAL

dynawave INCORPORATED	Sheet 3 of 3	DWG. NO. 6760-8521-6261	REV. AA