SPECIFICATION CONTROL DRAWING

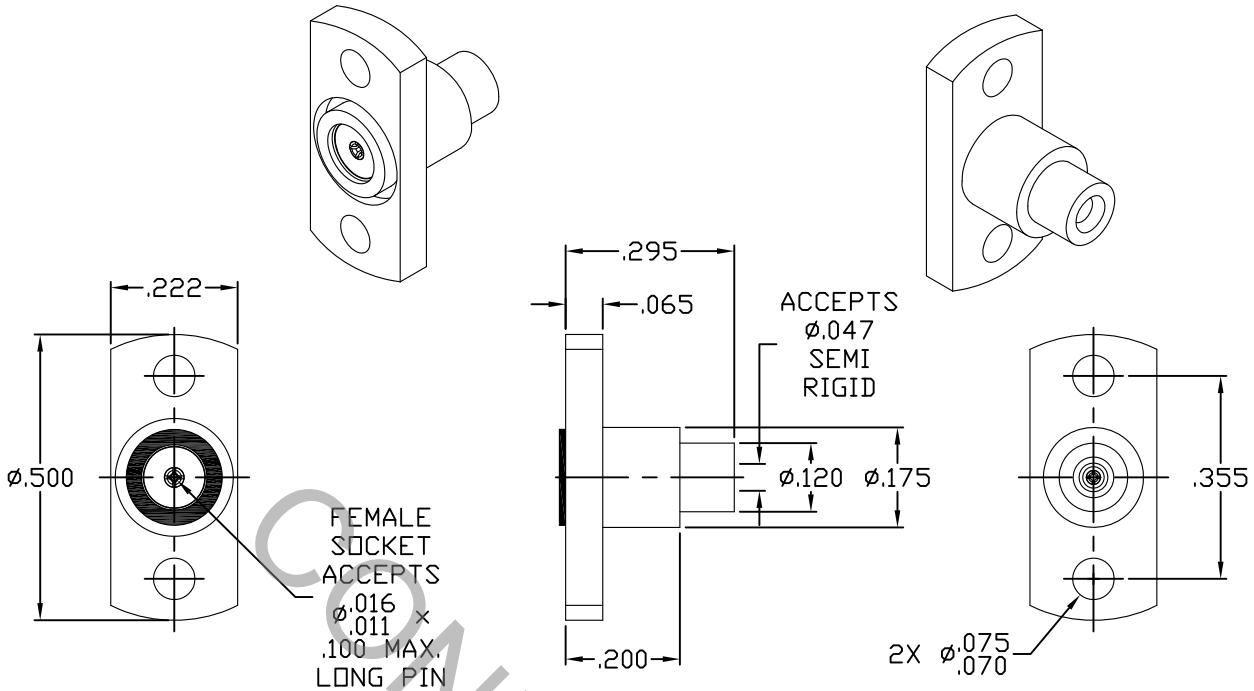

CONFIDENTIAL

1. MATING

INTERFACE DIMENSIONS PER DYNAWAVE SPECIFICATION MD-69

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 36.0 GHz
VSWR (MAX.) ❋	1.05 + .010 x FGHz
INSERTION LOSS (dB MAX.) ❋	.03 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	167
RF LEAKAGE (MIN. dB DOWN)	-100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	14-1882	7/24/14	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	±1/64	X °±1°0' X ° X' ± 15'

DRAWN RMS DATE 7/24/14

APPROVED DC DATE 7/24/14

CODE IDENT. 2J899

SHEET 1 OF 2

dynawave INCORPORATED
HAVERHILL, MA 01835

TITLE 2 HOLE FLANGE DIRECT SOLDER TO ø.047 SEMI-RIGID CABLE, ACCEPTS ø.016/.011 PIN

DWG. NO. 6952-4727-2713

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX AXIAL FORCE — 4.5 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — INTERFACE *40.0*
- WITHDRAWAL (MIN. OUNCES) — INTERFACE *1.0*

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. IN. LBS.) — N/A

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — N/A

* WHEN TESTED TO .012 ±.001 OR .015 ±.001 FEED THRU SIZE *

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (125 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY	BRASS PER ASTM B16, TEMPER H02, ALLOY C36000.
CONTACT	BERYLLIUM COPPER PER ASTM B196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM D 1710–02, TYPE 1, GRADE 1, CLASS B.
EMI GASKET	SILVER PLATED ALUMINUM IN SILICONE.

6. FINISH

BODY	NICKEL PER MIL–P–27418 (.000200 MIN. THK.) OVER COPPER PER AMS–2418 (.000010MIN. THK.).
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.).
INSULATOR & EMI GASKET	N/A