SPECIFICATION CONTROL DRAWING

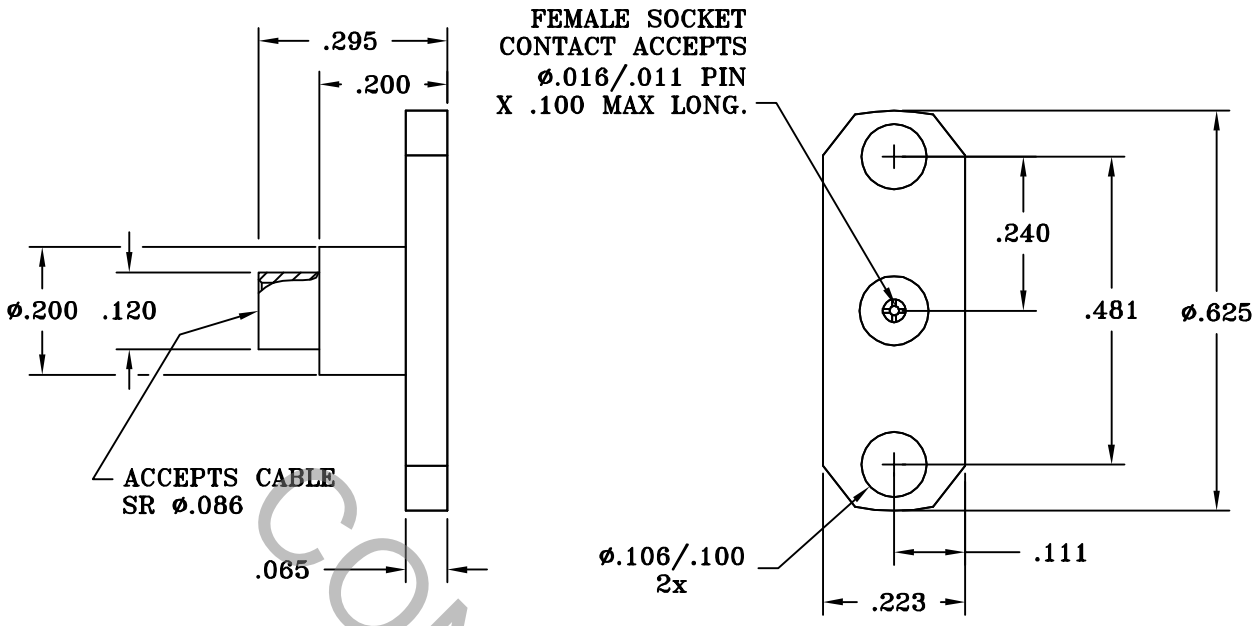

CONFIDENTIAL

1. MATING NOT APPLICABLE

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 36.0 GHz.
VSWR (MAX.) ❋	1.05 + .010 x FGHz.
INSERTION LOSS (dB MAX.)	.030 dB x $\sqrt{\text{FGHz}}$.
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	100 dB – FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65° c TO + 165° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	5000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	8.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	03-1515	4/23/03	DC
AB	12-1652	8/8/12	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	±1/64	X° ± 1° 0' X° X' ±15'

dynawave INCORPORATED
HAVERHILL, MA. 01835

DRAWN B.N. DATE 4/21/03

APPROVED DC DATE 4/23/03

TITLE
DIRECT ATTACHMENT
FOR SR .086
(2) HOLE FLANGE

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 6952-8520-6415

modified with deskPDF Editor - Get the free PDF Editor trial download at docudesk.com

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT

- MIN. AXIAL FORCE — 4.5 LBS.
- MIN. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) — 32.0
- WITHDRAWAL (MIN. OUNCES) — 1.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65 ° c TO + 200 °c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

CONFIDENTIAL

5. MATERIAL

CONNECTOR BODY	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACT	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.

6. FINISH

CONNECTOR BODY	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000150 MIN. THK.) OVER NICKEL (WOODS OR WATTS) (.000010 MIN. THK.)
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATOR	N/A

modified with deskPDF Editor - Get the free PDF Editor trial download at docudesk.com