SPECIFICATION CONTROL DRAWING

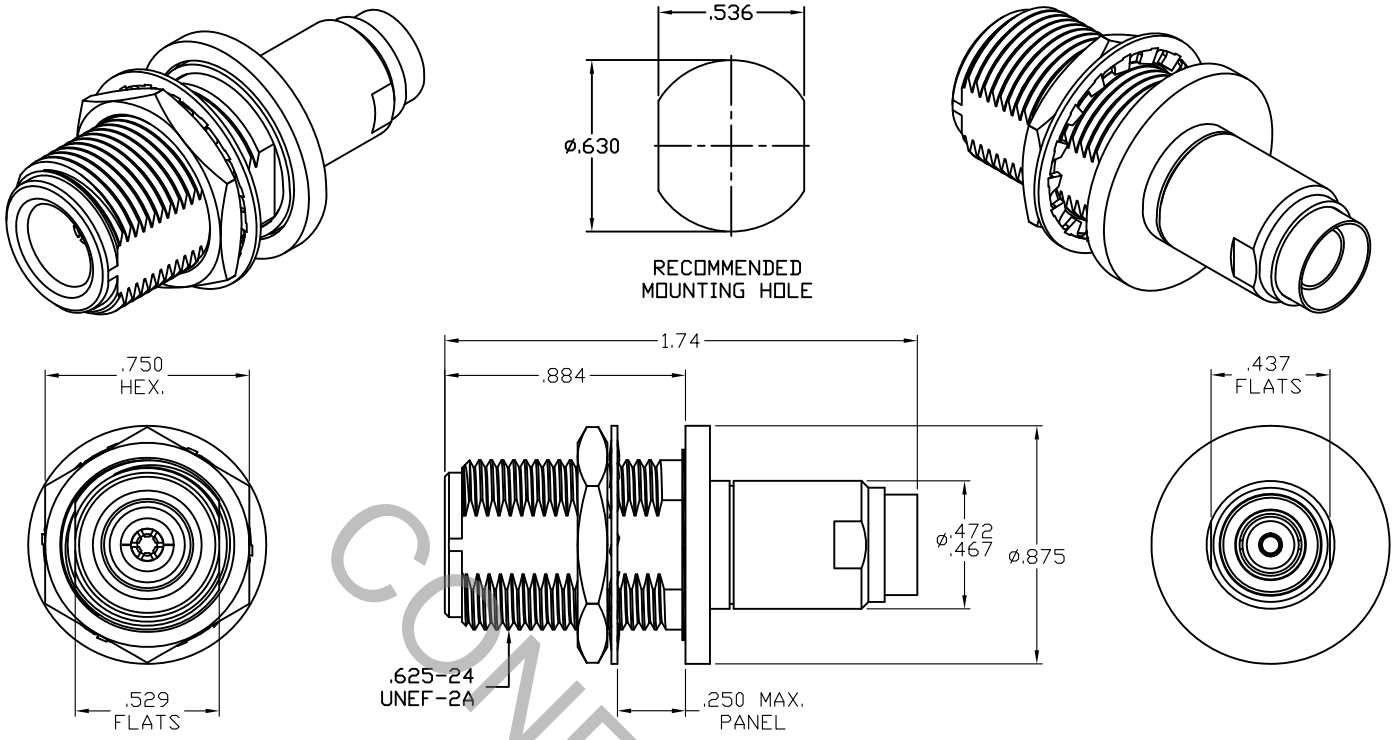

SOLD ON DYNAWAVE CABLE ASSEMBLIES ONLY

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 304.2 (N JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.07 + .007 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	500
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.5
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

This Document contains proprietary and confidential information.

RoHS COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	13-1927	6/27/13	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave CABLE INCORPORATED
HAVERHILL, MA 01835

DRAWN RMS DATE 6/27/13

APPROVED DC DATE 6/27/13

TITLE
N JACK, BULKHEAD,
SOLDER CLAMP, PLUG-IN
CTC, DF226 LIGHT ARMOR

CODE IDENT. 6DZL5

SHEET 1 OF 2

DWG. NO. 7510-226R-6240

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX. AXIAL FORCE — 6.0 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — INTERFACE 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — 15 – 18 IN. LBS.

RECOMMENDED MOUNTING TORQUE — 25 – 28 IN. LBS.

4. ENVIRONMENTAL

THERMAL SHOCK	MIL–STD–202, METHOD 107, COND. B (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY, BUSHINGS, CLAMP NUT, HEX NUT & PRESS SLEEVE	STAINLESS STEEL PER ASTM A 582, TYPE 303, COND. A.
CONTACTS	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INTERFACE INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
REAR INSULATOR	CROSS LINKED POLYETHYLENE (400° F).
GASKET & O–RING	SILICONE RUBBER PER ZZ–R–765.
LOCKWASHER	400 SERIES STAINLESS STEEL
SOLDER SLEEVE	BRASS PER ASTM B16, TEMPER H02, ALLOY C36000

6. FINISH

BODY, BUSHINGS, CLAMP NUT, HEX NUT, PRESS SLEEVE & LOCKWASHER	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
CONTACTS	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 0.75 (.000030 MIN. THK.) OVER NICKEL per SAE–AMS–QQ–N–290, CLASS 1 (.000050 MIN. THK.) OVER COPPER per AMS–2418 (.000010 MIN. THK.)
SOLDER SLEEVE	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL per SAE–AMS–QQ–N–290, CLASS 1 (.000150 MIN. THK.) OVER COPPER per AMS–2418 (.000010 MIN. THK.)
INSULATORS, GASKET & O–RING	N/A