SPECIFICATION CONTROL DRAWING

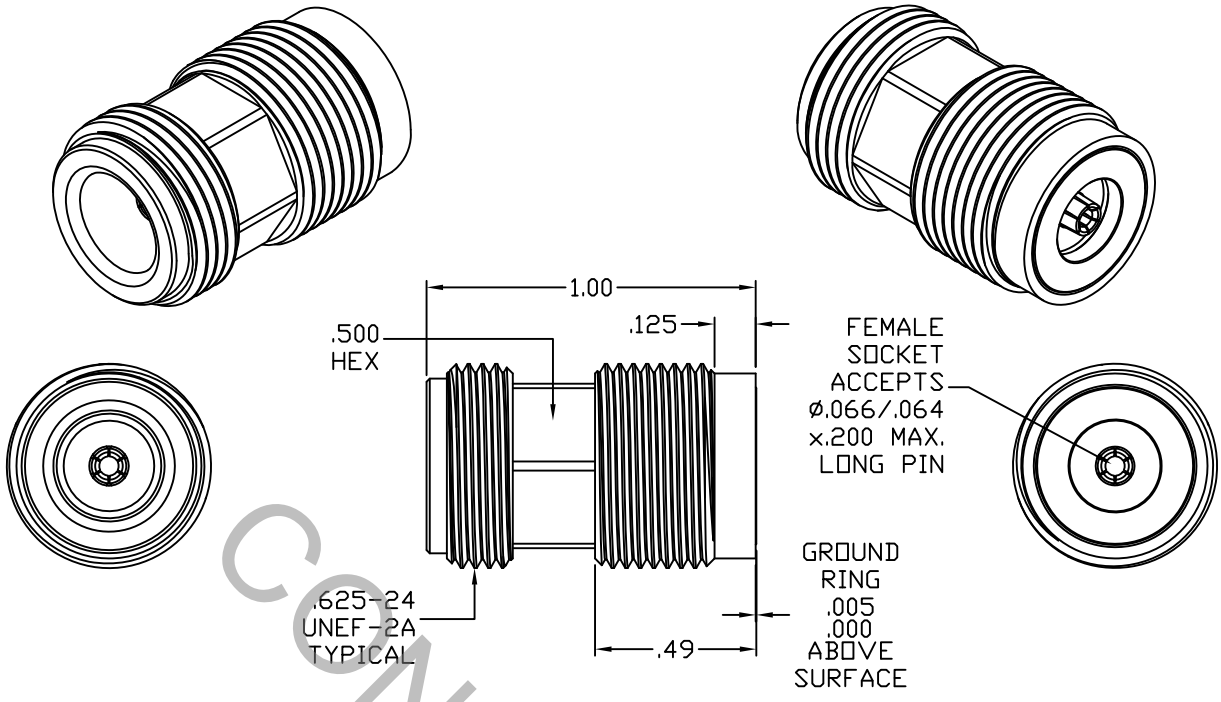

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 304.2 (N JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 10.0 GHz
VSWR (MAX.) ❋	1.06 + .008 x FGHz
INSERTION LOSS (dB MAX.) ❋	−.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	1,000
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	3,000
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.0
• OUTER CONTACT (MAX. MILLIOHMS)	0.2

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	16-2068	9/1/16	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN	DC	DATE	9/1/16
APPROVED	DC	DATE	9/1/16

TITLE: N JACK, THREAD-IN, ACCEPTS ø.065 PIN

CODE IDENT.	SHEET 1 OF 2	DWG. NO.
2J899		7530-0081-6265

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX. AXIAL FORCE — 6.0 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — INTERFACE 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — 15 – 18 IN. LBS.

RECOMMENDED MOUNTING TORQUE — 30 – 35 IN. LBS.

CONFIDENTIAL

4. ENVIRONMENTAL

THERMAL SHOCK	MIL–STD–202, METHOD 107, COND. B (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (750 VRMS)

5. MATERIAL

BODY	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACT	BERYLLIUM COPPER PER ASTM–B–196–90, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.

6. FINISH

BODY	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL per SAE–AMS–QQ–N–290, CLASS 1 (.000050 MIN. THK.) OVER COPPER per AMS–2418 (.000010 MIN. THK.)
INSULATOR	N/A