SPECIFICATION CONTROL DRAWING

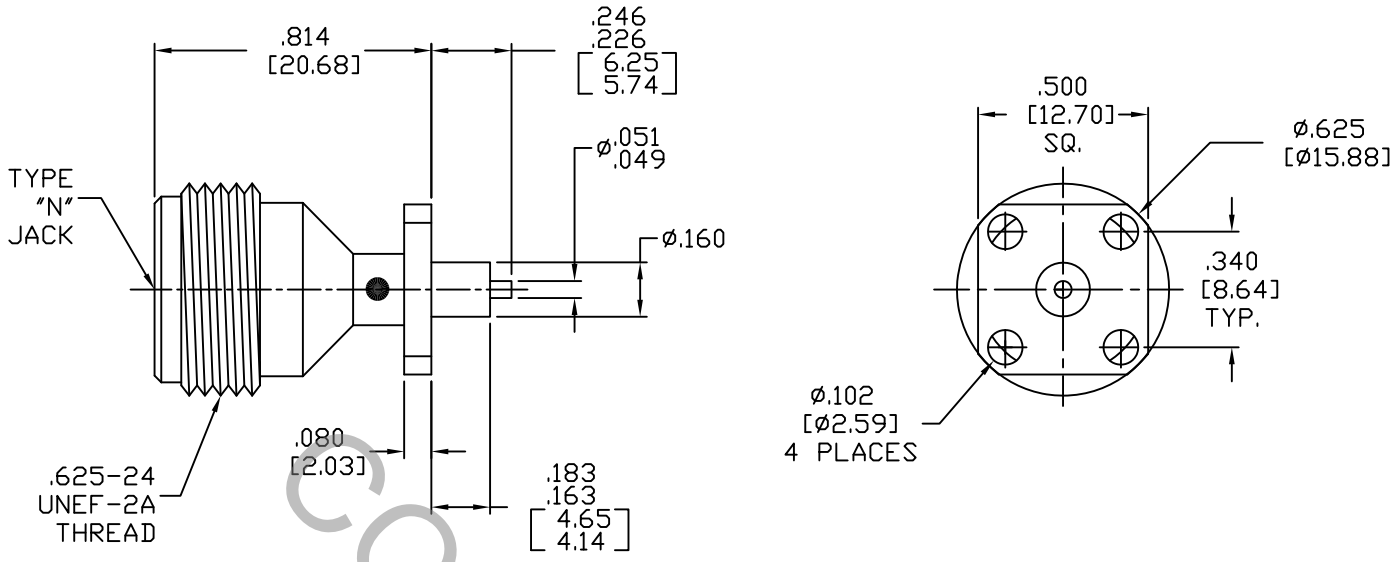

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 304.2 (N JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 11.0 GHz
VSWR (MAX.) ❋	1.07 + .008 x FGHz
INSERTION LOSS (dB MAX.) ❋	.065 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	500
RF LEAKAGE (MIN. dB DOWN)	-60 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	2.0
• OUTER CONTACT (MAX. MILLIOHMS)	3.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	15-1877	6/15/15	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	±1/64	X °±1 °0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 6/15/15

APPROVED DC DATE 6/15/15

TITLE
N JACK, 4 HOLE
FLANGE MOUNT, STRAIGHT
TERMINAL, EPOXY CAPTURED

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 7554-0032-2100

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX.AXIAL FORCE	6.0 LBS.
MAX. RADIAL TORQUE	4.0 IN./OZS.
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	INTERFACE 32.0
● WITHDRAWAL (MIN. OUNCES)	INTERFACE 2.0
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	18 – 23 IN. LBS.

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

5. MATERIAL

BODY	BRASS PER ASTM B16, TEMPER H02, ALLOY C36000
CONTACT	BERYLLIUM COPPER PER ASTM B196/B, 196M–03, COPPER ALLOY No. UNS C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM D 1710–02. TYPE 1, GRADE 1, CLASS B.

6. FINISH

BODY	TRI–METAL ALLOY, 55%–60% COPPER, 25%–28% TIN AND 14%–18% ZINC.
CONTACT	GOLD PER ASTM B 488, TYPE 1, CODE C, CLASS 1.25 (.000050 MIN.) OVER NICKEL PER SAE AMS QQ–N–290, CLASS 1 (.000050 MIN.) OVER COPPER PER AMS 2418 (.000010 MIN.)
INSULATOR	N/A