# SPECIFICATION CONTROL DRAWING

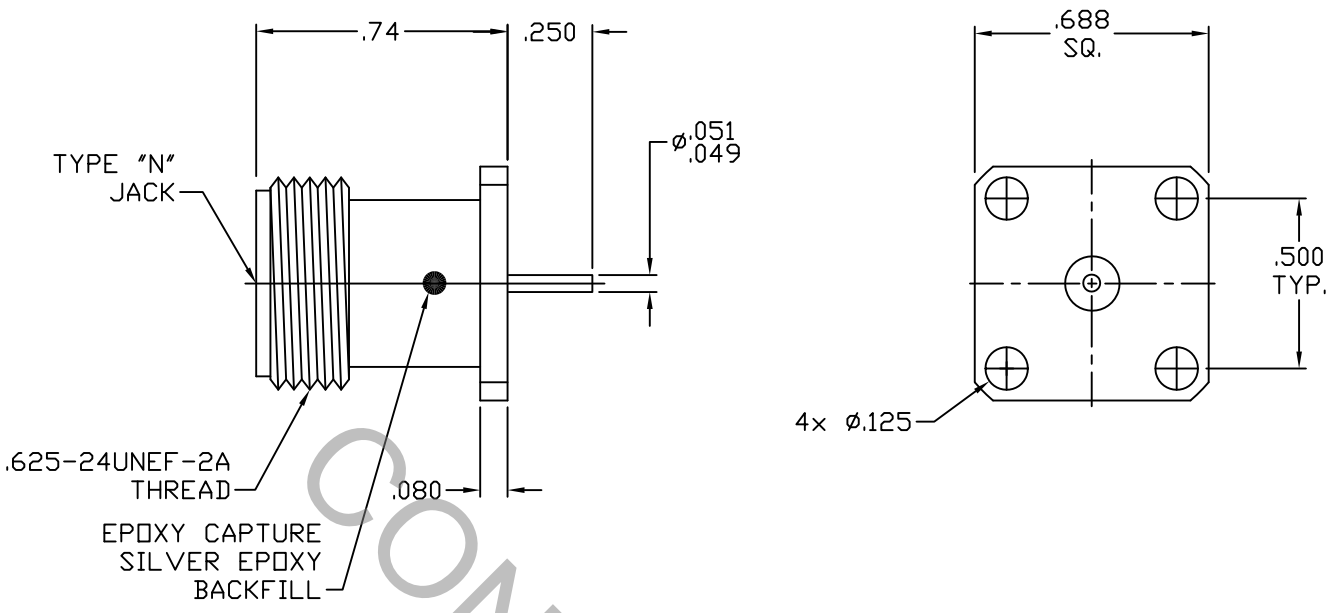


CONFIDENTIAL

## 1. MATING

INTERFACE DIMENSIONS MIL-STD-348 Fig. 304.2 (N JACK).

## 2. ELECTRICAL

| | |
|---|---|
| FREQUENCY RANGE GHz | DC TO 11.0 GHz |
| VSWR (MAX.) ❋ | 1.07 + .010 x FGHz |
| INSERTION LOSS (dB MAX.) ❋ | .05 dB x $\sqrt{\text{FGHz}}$ |
| NOMINAL IMPEDANCE (OHMS) | 50 |
| VOLTAGE RATING (MAX. VRMS) | 250 |
| RF LEAKAGE (MIN. dB DOWN) | −75 dB − FGHz |
| TEMPERATURE RATING (DEGREES CENTIGRADE) | −65°c TO + 165°c |
| DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS) | 2,500 |
| INSULATION RESISTANCE (MIN. MEGOHMS) | 5,000 |
| CONTACT RESISTANCE | |
| • CENTER CONTACT (MAX. MILLIOHMS) | 1.0 |
| • OUTER CONTACT (MAX. MILLIOHMS) | 2.0 |

❋ TERMINATED IN A 50 OHM LOAD

**RoHS** COMPLIANT

| REV. | DCN NO. | DATE | APP. |
|---|---|---|---|
| AA | 11-2013 | 11/16/11 | TS |

DIMENSIONS ARE IN INCHES
TOLERANCES

| DECIMALS | FRACTIONAL | ANGULAR |
|---|---|---|
| .X ±.030<br>.XX ±.010<br>.XXX ±.005 | ±1/64 | X °±1 °0'<br>X ° X' ± 15' |

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 11/16/11

APPROVED TS DATE 11/16/11

TITLE
N JACK, 4 HOLE
FLANGE, PIN TERMINAL,
EPOXY CAPTURED

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 7554-0032-2706

# SPECIFICATION CONTROL DRAWING

## 3. MECHANICAL

| | |
|---|---|
| CAPTIVATION–CENTER CONTACT | |
| MAX.AXIAL FORCE | 10.0 LBS. |
| MAX. RADIAL TORQUE | 4.0 IN./OZS. |
| CENTER CONTACT AXIAL FORCES | |
| ● INSERTION (MAX. OUNCES) | INTERFACE 32.0 |
| ● WITHDRAWAL (MIN. OUNCES) | INTERFACE 2.0 |
| CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) | 2.0 |
| CONNECTOR DURABILITY (MIN. CYCLES) | 500 |
| RECOMMENDED MATING TORQUE | 30 – 35 IN. LBS. |

CONFIDENTIAL

## 4. ENVIRONMENTAL

| | |
|---|---|
| TEMPERATURE CYCLING | MIL–STD–202, METHOD 102, COND. C ( –65° c TO + 200° c ) |
| SHOCK | MIL–STD–202, METHOD 213, COND. I (100 G's) |
| VIBRATION | MIL–STD–202, METHOD 204, COND. D (20 G's) |
| MOISTURE RESISTANCE | MIL–STD–202, METHOD 106, LESS STEP 7b |
| CORROSION | MIL–STD–202, METHOD 101, COND. B (48 HOURS) |
| BAROMETRIC PRESSURE (ALTITUDE) | MIL–STD–202, METHOD 105, COND. C ( 70,000 FT. ) ( 625 VRMS ) |

## 5. MATERIAL

| | |
|---|---|
| BODY | BRASS PER ASTM B16, TEMPER H02, ALLOY C36000 |
| CONTACT | BERYLLIUM COPPER PER ASTM B196/B, 196M–03, COPPER ALLOY No. UNS–C17300. TEMPER TD04. |
| INSULATOR | TEFLON PER ASTM D 1710–02, TYPE 1, GRADE 1, CLASS B. |

## 6. FINISH

| | |
|---|---|
| BODY | NICKEL PER SAE–AMS–QQ–N–290, CLASS 1 (.000200 MIN. THK.)<br>ADD BRIGHTNESS TO OBTAIN BRIGHT APPEARANCE<br>OVER COPPER PER AMS–2418, (.000010 MIN. OR AS SPECIFIED) |
| CONTACT | GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.25<br>(.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290<br>CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418<br>(.000010 MIN. THK.) |
| INSULATOR | N/A |