SPECIFICATION CONTROL DRAWING

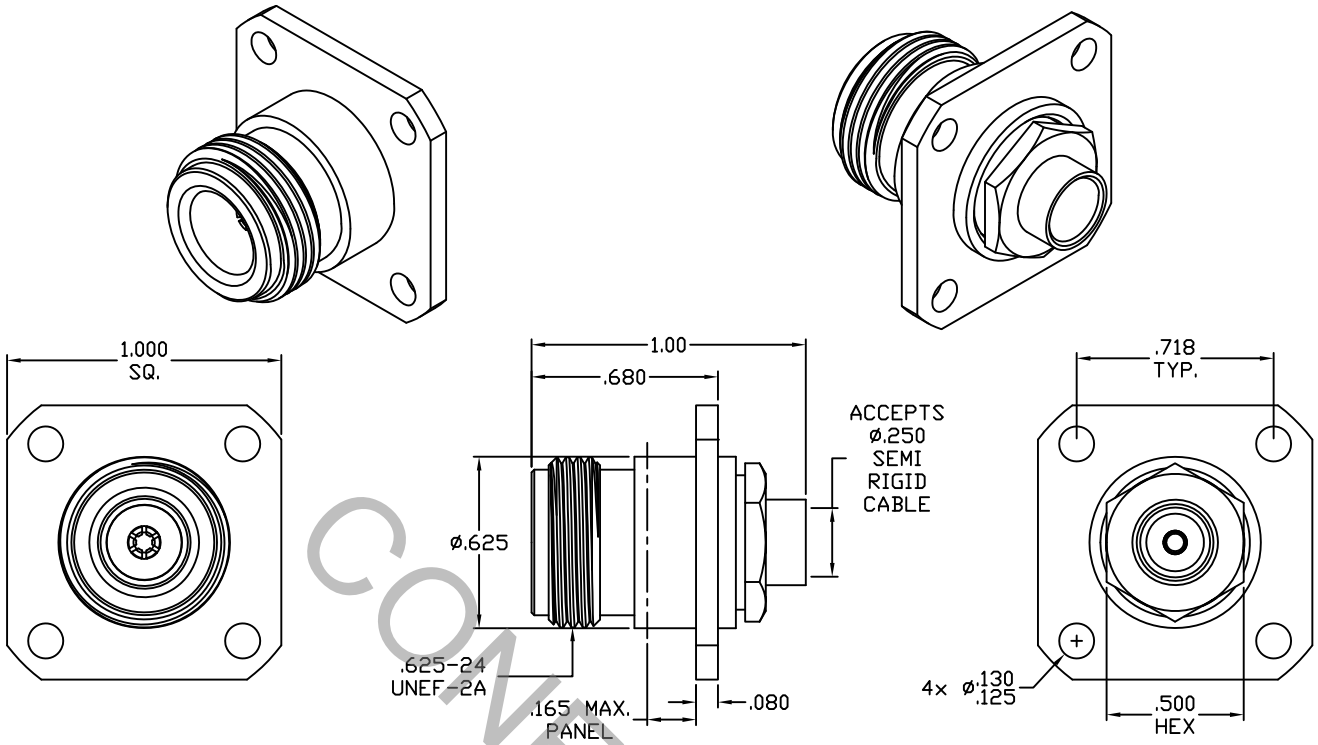

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 304.2 (N JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.06 + .005 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	500
RF LEAKAGE (MIN. dB DOWN)	-100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	13-1903	6/20/13	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN DC DATE 6/20/13

APPROVED DC DATE 6/20/13

TITLE TYPE N JACK, 4 HOLE FLANGE, DIRECT SOLDER TO ø.250 SEMI-RIGID CABLE

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 7554-2521-6227

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MIN. AXIAL FORCE	6.0 LBS.
MIN. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	INTERFACE 48.0
● WITHDRAWAL (MIN. OUNCES)	INTERFACE 2.0
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	30 – 35 IN. LBS.

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 107, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

5. MATERIAL

BODY & CLAMP NUT	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACT	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
O–RING	SILICONE RUBBER PER ZZ–R–765.

6. FINISH

BODY	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
CLAMP NUT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000150 MIN. THK.) OVER NICKEL (WOODS OR WATTS) (.000010 MIN. THK.)
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATOR & O–RING	N/A