SPECIFICATION CONTROL DRAWING

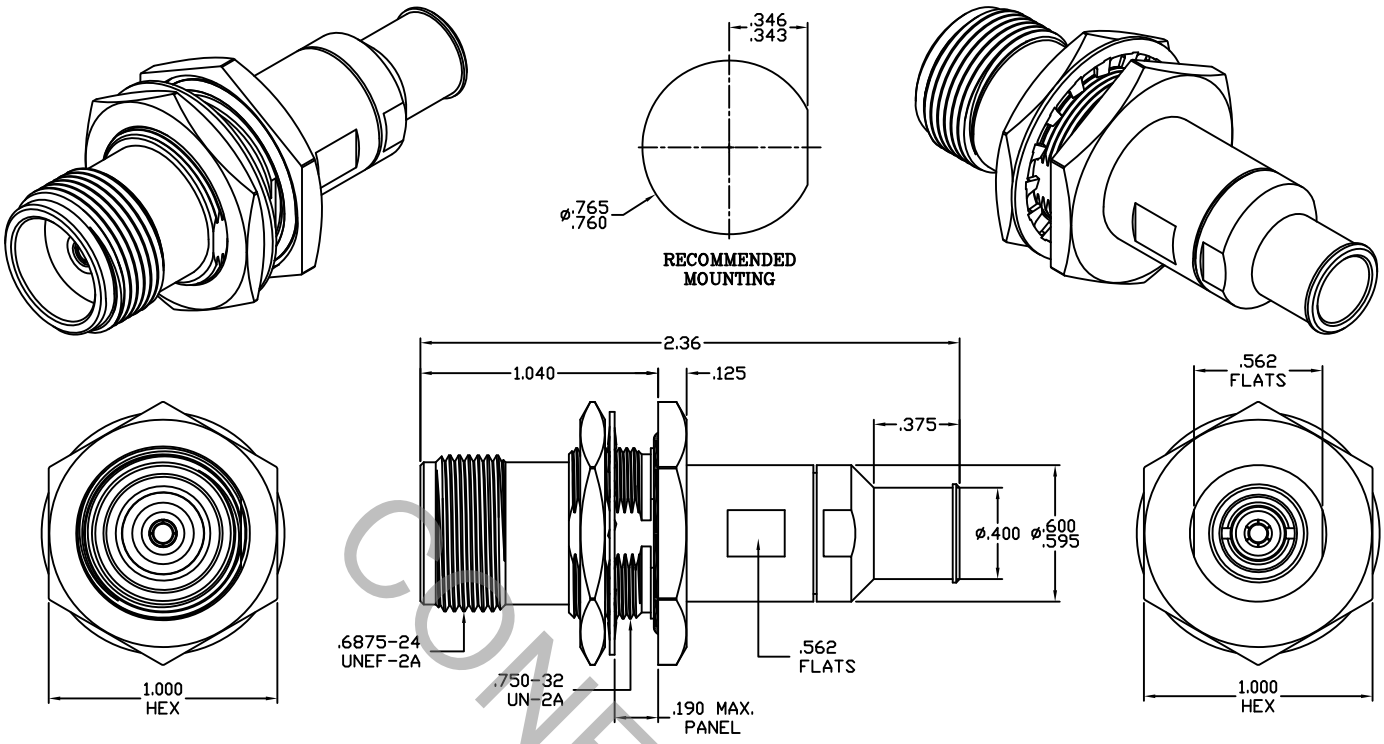

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 309.2 (SC JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 13.0 GHz
VSWR (MAX.) ❋	1.06 + .005 x FGHz
INSERTION LOSS (dB MAX.) ❋	.06 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	500
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	3.0
• OUTER CONTACT (MAX. MILLIOHMS)	1.0

❋ TERMINATED IN A 50 OHM LOAD

This Document contains proprietary and confidential information.

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	12-1717	8/24/12	DC
AB	13-2287	9/24/13	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave CABLE INCORPORATED
HAVERHILL, MA 01835

DRAWN DC DATE 8/24/12

APPROVED DC DATE 8/24/12

TITLE SC JACK, BULKHEAD, PLUG-IN, SOLDER CLAMP, DF118 LOW LOSS

CODE IDENT. 6DZL5

SHEET 1 OF 2

DWG. NO. 7910-118H-6240

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX. AXIAL FORCE — 6.0 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — N/A
- WITHDRAWAL (MIN. OUNCES) — N/A

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — 20 – 23 IN. LBS.

RECOMMENDED MOUNTING TORQUE — 25 – 28 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 107, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY, HEX NUT, CLAMP NUT, BUSHING & PRESS SLEEVE	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACTS	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATORS	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
O–RINGS	SILICONE RUBBER PER ZZ–R–765.
SOLDER SLEEVE	BRASS PER ASTM–B–16, TEMPER H02, ALLOY C36000.
LOCKWASHER	400 SERIES STAINLESS STEEL

6. FINISH

BODY, HEX NUT, LOCKWASHER, CLAMP NUT, BUSHING & PRESS SLEEVE	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
SOLDER SLEEVE	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000150 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
CONTACTS	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 0.75 (.000030 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATORS & O–RINGS	N/A