SPECIFICATION CONTROL DRAWING

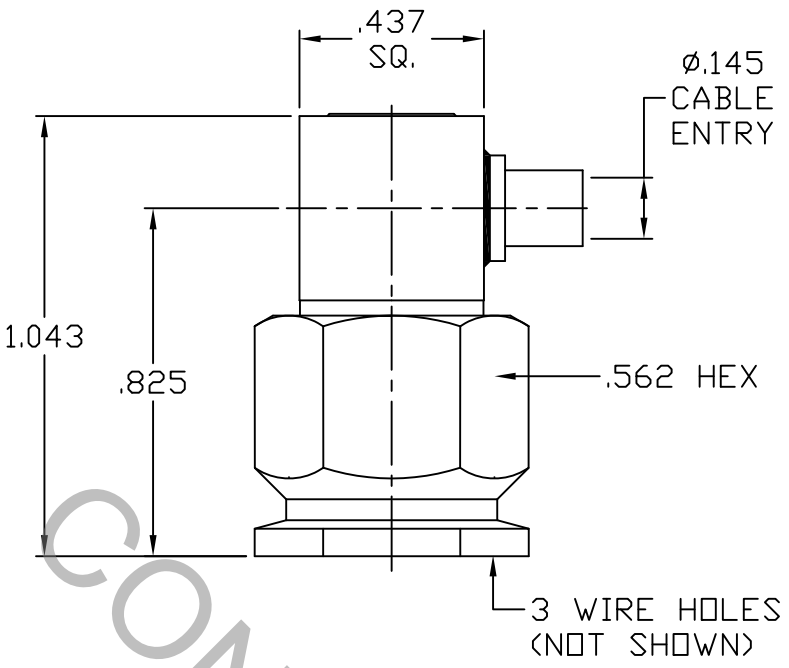

CONFIDENTIAL

1. MATING

INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 313.1 (TNC PLUG).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 6.0 GHz
VSWR (MAX.) ❋	1.10 + .015 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	415
RF LEAKAGE (MIN. dB DOWN)	-100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,250
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.5
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	07-1410	4/18/07	DC
AB	13-1695	5/8/13	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN DC DATE 4/18/07

APPROVED DC DATE 4/18/07

TITLE: TNC PLUG
RIGHT ANGLE
DIRECT SOLDER TO
ø.141 SEMI-RIGID CABLE

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 8201-4120-6200

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX. AXIAL FORCE — 6.0 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — N/A
- WITHDRAWAL (MIN. OUNCES) — N/A

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — 25 – 30 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (310 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY, COUPLING NUT & CAP	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACT & RETAINING RING	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATORS	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
GASKET	SILICONE RUBBER PER ZZ–R–765.

6. FINISH

COUPLING NUT & CAP	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
BODY	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000150 MIN. THK.) OVER NICKEL (WOODS OR WATTS) (.000010 MIN. THK.)
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATORS, GASKET & RETAINING RING	N/A