SPECIFICATION CONTROL DRAWING

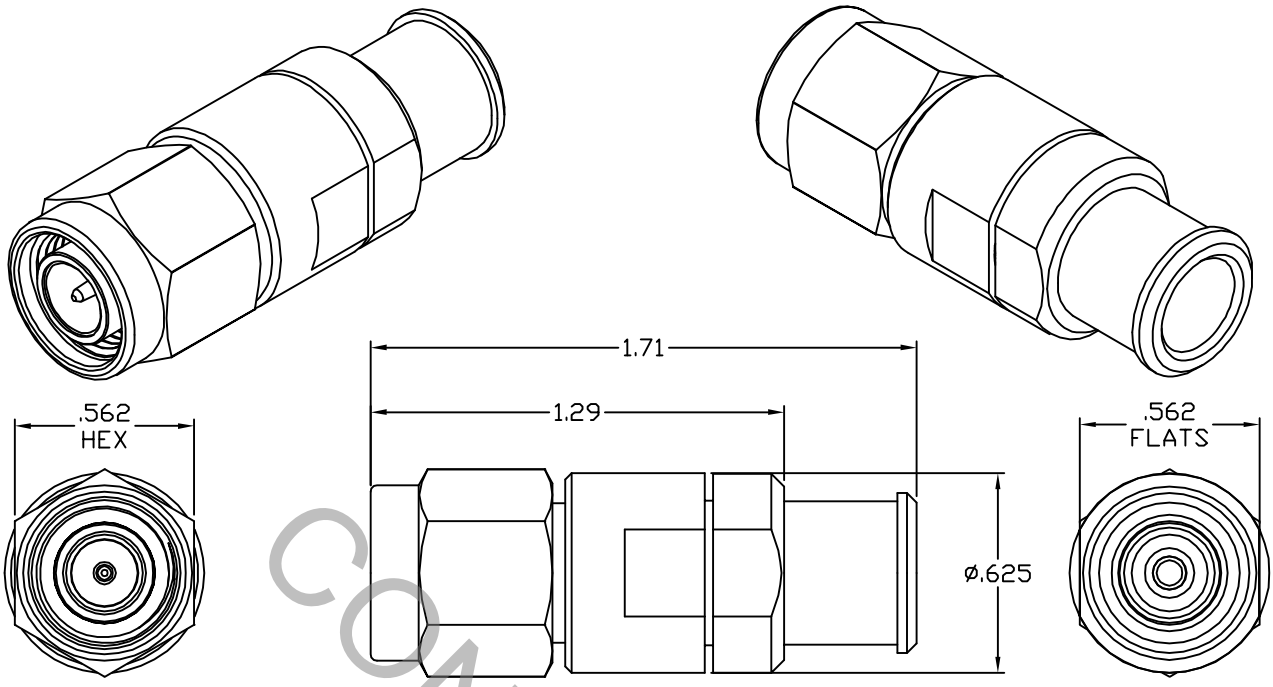

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS MIL-STD-348 Fig. 313.3 (TNCA PLUG) WITH SOLID OUTER.

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.06 + .006 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{FGHz}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	500
RF LEAKAGE (MIN. dB DOWN)	100 dB – FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.5
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	10-1212	2/26/10	DC
AB	10-1929	9/30/10	DC
BA	12-1473	6/11/12	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	±1/64	X °±1°0' X ° X' ± 15'

dynawave CABLE INCORPORATED
HAVERHILL, MA 01835

DRAWN DC DATE 2/26/10

APPROVED DC DATE 2/26/10

TITLE
TNCA PLUG
SOLDER CLAMP
DF418 LOW LOSS CABLE

CODE IDENT. 6DZL5

SHEET 1 OF 2

DWG. NO. 8400-418H-6200

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX. AXIAL FORCE	6.0 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
• INSERTION (MAX. OUNCES)	N/A
• WITHDRAWAL (MIN. OUNCES)	N/A
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	15 – 18 IN. LBS.

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

5. MATERIAL

BODY & COUPLING NUT	STAINLESS STEEL PER AMS 5640, TYPE 303, COND. A
CONTACT & RETAINING RING	BERYLLIUM COPPER PER ASTM B196–90, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
GASKET	SILICONE RUBBER PER ZZ–R–765

6. FINISH

BODY & COUPLING NUT	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 2.5 (.00010 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATOR, GASKET & RETAINING RING	N/A