SPECIFICATION CONTROL DRAWING

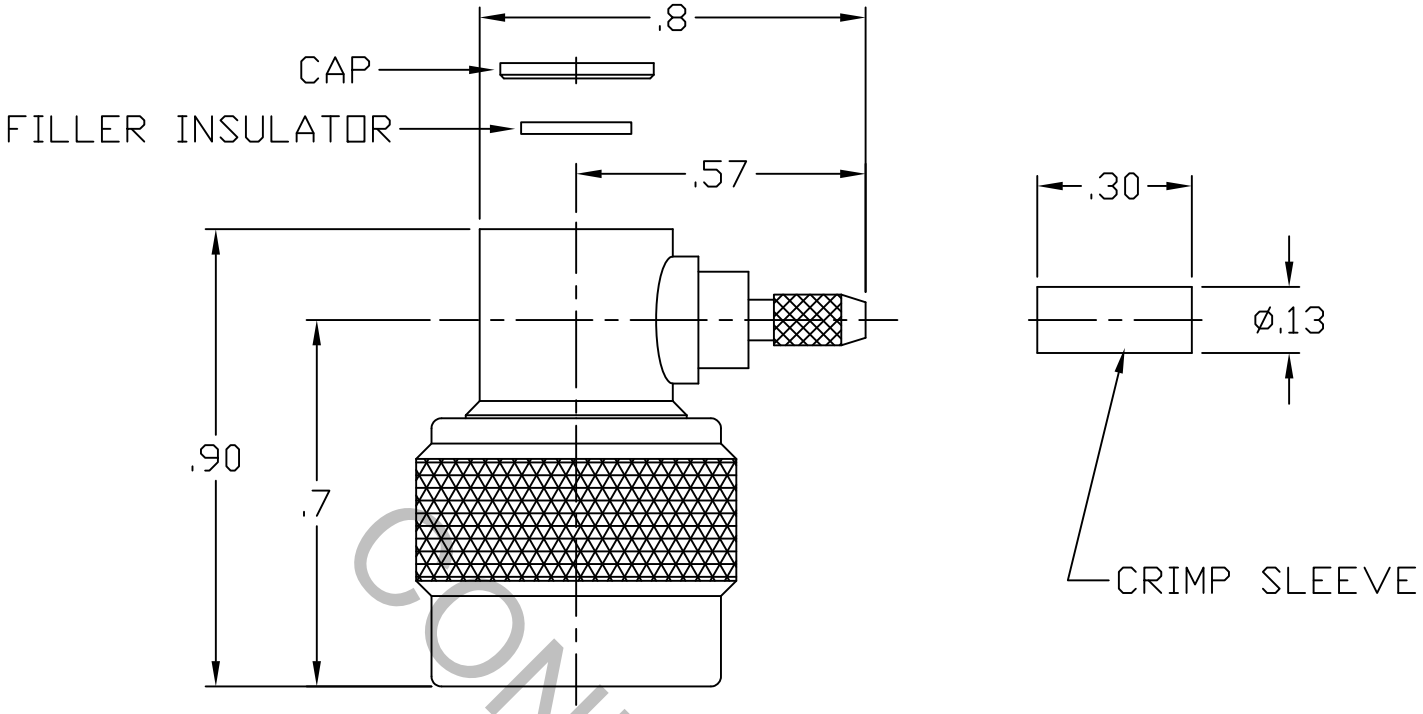

CONFIDENTIAL

1. MATING — INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 313.1 (TNC PLUG) WITH SOLID OUTER CONDUCTOR.

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 6.0 GHz
VSWR (MAX.) ❋	1.65 + .020 x FGHz
INSERTION LOSS (dB MAX.) ❋	.06 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	335
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,000
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.5
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	10-1008	1/5/10	TS
AB	10-1028	1/12/10	TS
AC	10-1209	2/26/10	DC
AD	10-1343	4/1/10	DC
AE	10-1369	4/8/10	DC
AF	10-1386	4/14/10	DC
AG	16-2402	11/11/16	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 1/5/10

APPROVED DC DATE 1/5/10

CODE IDENT. 2J899

SHEET 1 OF 2

TITLE
TNC PLUG
RIGHT ANGLE CRIMP TO
RG316 DB FLEX. CABLE

DWG. NO. 8401-1830-2700

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX. AXIAL FORCE	6.0 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	N/A
● WITHDRAWAL (MIN. OUNCES)	N/A
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	15 – 20 IN. LBS.

4. ENVIRONMENTAL

THERMAL SHOCK	MIL–STD–202, METHOD 107, COND. B (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (250 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY, COUPLING NUT & CRIMP SLEEVE	BRASS PER ASTM B 16, TEMPER H02, ALLOY C36000.
CONTACT & RETAINING RING	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
GASKET	SILICONE RUBBER PER ZZ–R–765.

6. FINISH

BODY, COUPLING NUT & CLAMP NUT AND CRIMP SLEEVE	NICKEL PER QQ–N–290, CLASS 1.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL per SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER per AMS–2418 (.000010 MIN. THK.)
INSULATOR, RETAINING RING & GASKET	N/A