SPECIFICATION CONTROL DRAWING

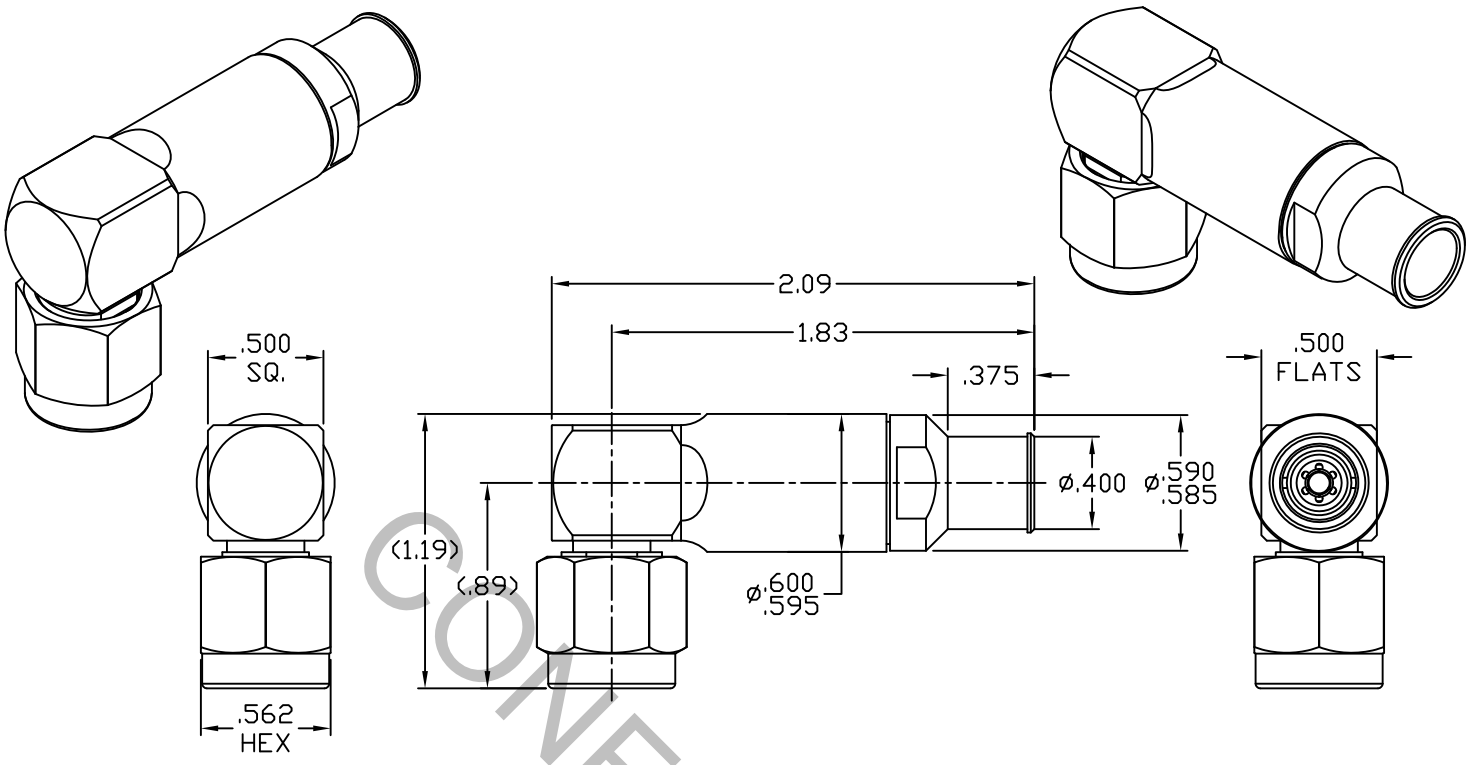

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 313.3 (TNCA PLUG) WITH SOLID OUTER.

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.08 + .007 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	500
RF LEAKAGE (MIN. dB DOWN)	-100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,500
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.5
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.
AA	17-1373	3/20/17	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave CABLE INCORPORATED
HAVERHILL, MA 01835

DRAWN RMS DATE 3/20/17

APPROVED DC DATE 3/20/17

TITLE
TNCA PLUG, RIGHT ANGLE, SOLDER CLAMP, PLUG-IN CONTACT, DF318 LOW LOSS

CODE IDENT. 6DZL5

SHEET 1 OF 2

DWG. NO. 8401-318H-6249

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX. AXIAL FORCE	6.0 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	N/A
● WITHDRAWAL (MIN. OUNCES)	N/A
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	15 – 18 IN. LBS.

4. ENVIRONMENTAL

THERMAL SHOCK	MIL–STD–202, METHOD 107, COND. B (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (375 VRMS)

CONFIDENTIAL

5. MATERIAL

CUBE, BODY, BUSHINGS, CLAMP NUT, COUPLING NUT & PRESS SLEEVE	STAINLESS STEEL PER ASTM–A–582, TYPE 303, COND. A
CONTACTS & RETAINING RING	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATORS	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
REAR INSULATOR	CROSS LINKED POLYETHYLENE.
GASKET	SILICONE RUBBER PER ZZ–R–765.
SOLDER SLEEVE	BRASS PER ASTM–B–16, TEMPER H02, ALLOY C36000.

6. FINISH

CUBE, BODY, BUSHINGS, CLAMP NUT, COUPLING NUT & PRESS SLEEVE	PASSIVATE PER AMS–2700, TYPE 2, CLASS 4.
SOLDER SLEEVE	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000150 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
CONTACTS	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 0.75 (.000030 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
RIGHT ANGLE CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE–AMS–QQ–N–290 CLASS 1 (.000050 MIN. THK.) OVER COPPER PER AMS–2418 (.000010 MIN. THK.)
INSULATORS, RETAINING RING & GASKET	N/A