SPECIFICATION CONTROL DRAWING

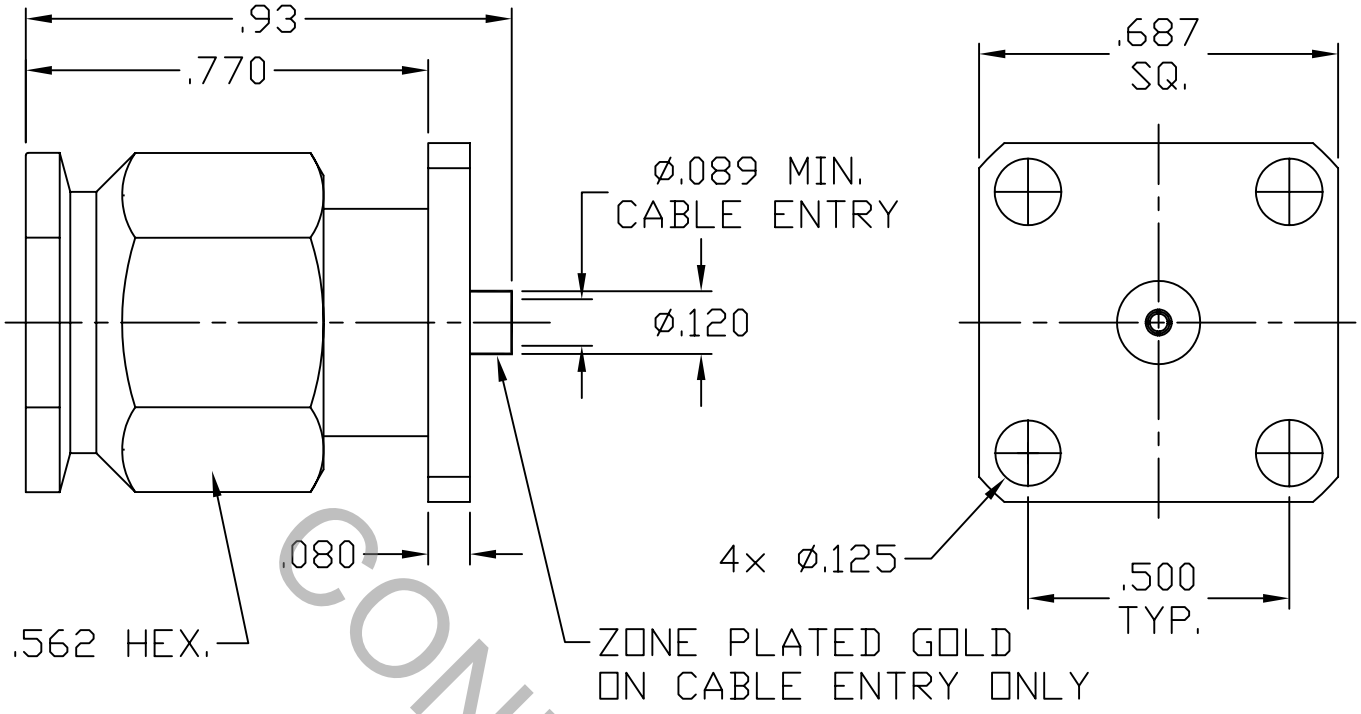

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 313.1 (TNC PLUG).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.07 + .010 x FGHz
INSERTION LOSS (dB MAX.) ❋	.05 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	300
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	900
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	1.5
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	08-1472	4/29/08	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	±1/64	X °±1°0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 4/29/08

APPROVED DC DATE 4/29/08

TITLE KTNC, PLUG
4 HOLE FLANGE
DIRECT SOLDER TO
ø.085 SEMI-RIGID CABLE

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 8454-8521-6800

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX.AXIAL FORCE — 4.5 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — N/A
- WITHDRAWAL (MIN. OUNCES) — N/A

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. IN. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — 10 – 15 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (225 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY & COUPLING NUT	STAINLESS STEEL PER ASTM–A–581, TYPE 303, COND. A
CONTACT & RETAINING RING	BERYLLIUM COPPER PER ASTM B196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710–02, TYPE 1, GRADE 1, CLASS B.
GASKET	SILICONE RUBBER PER ZZ–R–765.

6. FINISH

BODY (CABLE ENTRY ONLY)	ZONE PLATED GOLD ON INTERNAL AND EXTERNAL CABLE ENTRY GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 1.25 (.000050 MIN. THK.) OVER NICKEL per QQ–N–290 (.000150 MIN. THK.) OVER COPPER per MIL–C–14550 (.000010 MIN. THK.)
BODY AND COUPLING NUT	PASSIVATE PER AMS QQ–P–35, TYPE 2
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 2.5 (.000100 MIN. THK.) OVER NICKEL per QQ–N–290 (.000050 MIN. THK.) OVER COPPER per MIL–C–14550 (.000010 MIN. THK.)
INSULATOR, RETAINING RING & GASKET	N/A