SPECIFICATION CONTROL DRAWING

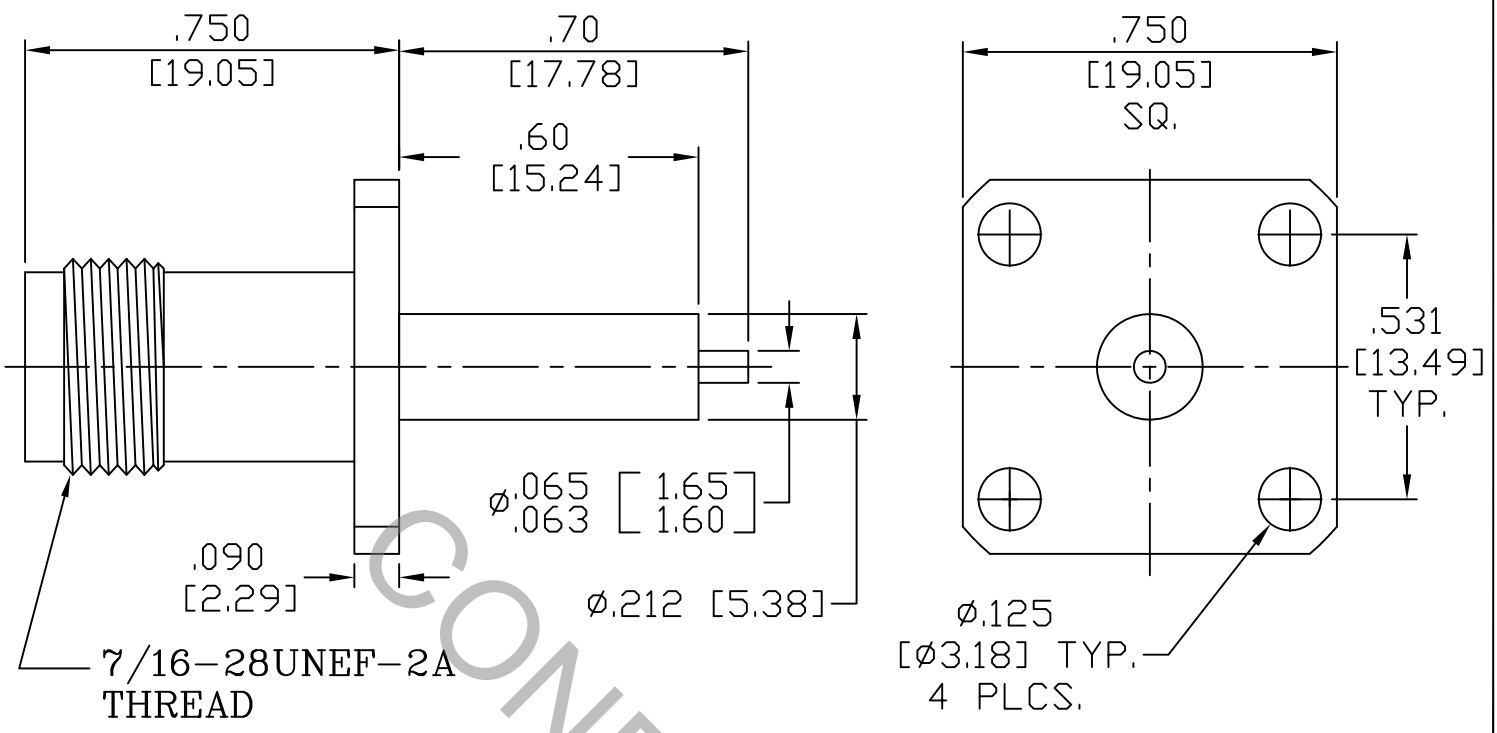

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 313.2 (TNC JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz
VSWR (MAX.) ❋	1.05 + .010 x FGHz
INSERTION LOSS (dB MAX.) ❋	.04 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	300
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	10-1418	4/22/10	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ±.030 .XX ±.010 .XXX ±.005	± 1/64	X °±1°0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN	TS	DATE	4/22/10
APPROVED	DC	DATE	4/22/10

TITLE
KTNC JACK
4 HOLE FLANGE
STRAIGHT TERMINAL

CODE IDENT.	SHEET 1 OF 2	DWG. NO.
2J899		8554-0031-6224

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT	
MAX. AXIAL FORCE	4.5 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	32.0
● WITHDRAWAL (MIN. OUNCES)	2.0
CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RECOMMENDED MATING TORQUE	10 – 15 IN. LBS.

CONFIDENTIAL

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 200° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (310 VRMS)

5. MATERIAL

BODY	STAINLESS STEEL PER ASTM A 582, TYPE 303, COND. A
CONTACT	BERYLLIUM COPPER PER ASTM B196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM D 1710–02, TYPE 1, GRADE 1, CLASS B.

6. FINISH

BODY	PASSIVATE PER AMS 2700, TYPE 2, CLASS 4.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 2.5 (.000100 MIN. THK.) OVER NICKEL per QQ–N–290 (.000050 MIN. THK.) OVER COPPER per MIL–C–14550 (.000010 MIN. THK.)
INSULATOR	N/A