SPECIFICATION CONTROL DRAWING

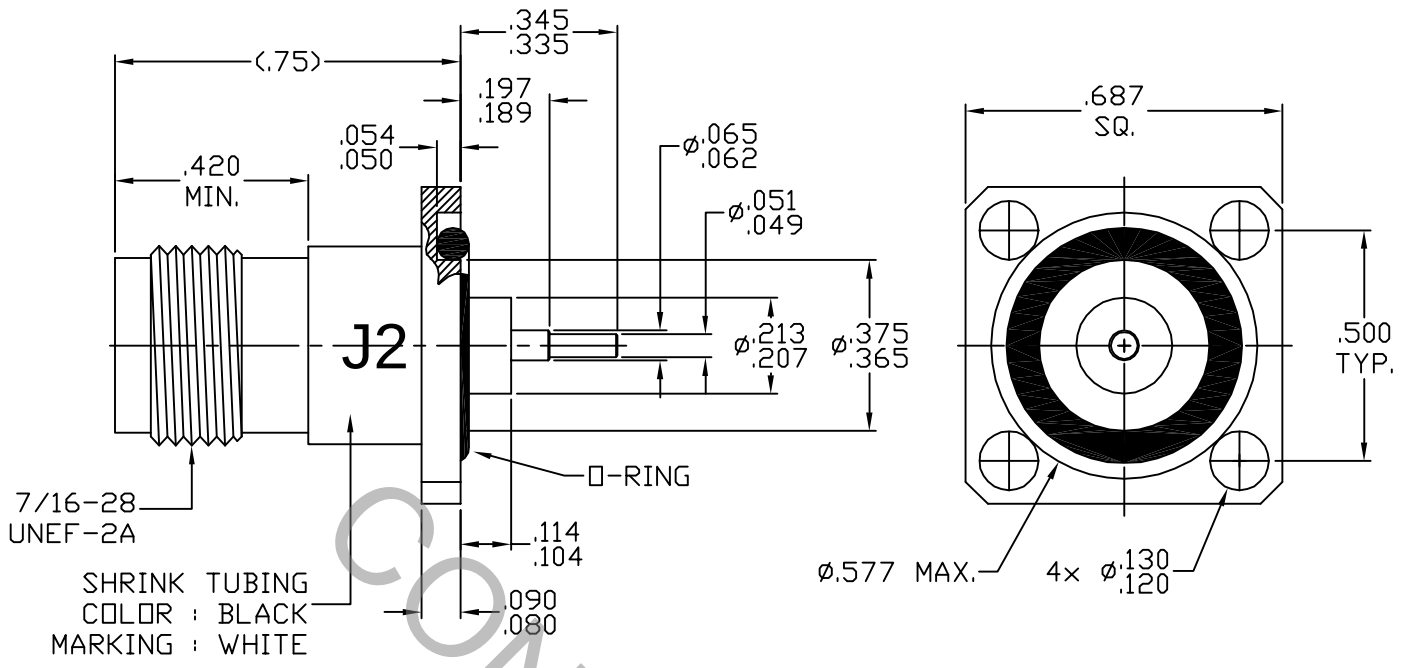

CONFIDENTIAL

1. MATING INTERFACE DIMENSIONS Per MIL-STD-348 Fig. 313.2 (TNC JACK).

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 18.0 GHz.
VSWR (MAX.) ❋	1.07 + .008 x FGHz.
INSERTION LOSS (dB MAX.) ❋	.04 dB x $\sqrt{\text{FGHz}}$.
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	410
RF LEAKAGE (MIN. dB DOWN)	−100 dB − FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	−65°c TO + 165°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	1,250
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	07-2133	11/20/07	TS
AB	07-2186	12/10/07	DC

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X ° ± 1° 0' X ° X' ± 15'

dynawave INCORPORATED
HAVERHILL, MA 01835

DRAWN TS DATE 11/20/07

APPROVED DC DATE 11/20/07

TITLE
KTNC JACK
4 HOLE FLANGE
PIN TERMINAL

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 8554-0631-2707

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION–CENTER CONTACT
- MAX. AXIAL FORCE — 6.0 LBS.
- MAX. RADIAL TORQUE — N/A

CENTER CONTACT AXIAL FORCES
- INSERTION (MAX. OUNCES) — INTERFACE 32.0
- WITHDRAWAL (MIN. OUNCES) — INTERFACE 2.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) — 2.0

CONNECTOR DURABILITY (MIN. CYCLES) — 500

RECOMMENDED MATING TORQUE — 15 – 20 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL–STD–202, METHOD 102, COND. C (–65° c TO + 165° c)
SHOCK	MIL–STD–202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL–STD–202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL–STD–202, METHOD 106, LESS STEP 7b
CORROSION	MIL–STD–202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL–STD–202, METHOD 105, COND. C (70,000 FT.) (310 VRMS)

CONFIDENTIAL

5. MATERIAL

BODY	BRASS PER ASTM B 16, TEMPER H02, ALLOY C36000.
CONTACT	BERYLLIUM COPPER PER ASTM–B–196/B, 196M–03, COPPER ALLOY No. UNS–C17300, TEMPER TD04.
INSULATOR	TEFLON PER ASTM–D–1710.–02, TYPE 1, GRADE 1, CLASS B.
O'RING	SIILCONE RUBBER PER ZZ–R–765E, CLASS 1.

6. FINISH

BODY	NICKEL PER QQ–N–290, CLASS 1.
CONTACT	GOLD PER ASTM–B–488, TYPE I, CODE C, CLASS 2.5 (.000100 MIN. THK.) OVER NICKEL per QQ–N–290 (.000050 MIN. THK.) OVER COPPER per MIL–C–14550 (.000010 MIN. THK.)
INSULATOR AND O'RING	N/A