SPECIFICATION CONTROL DRAWING

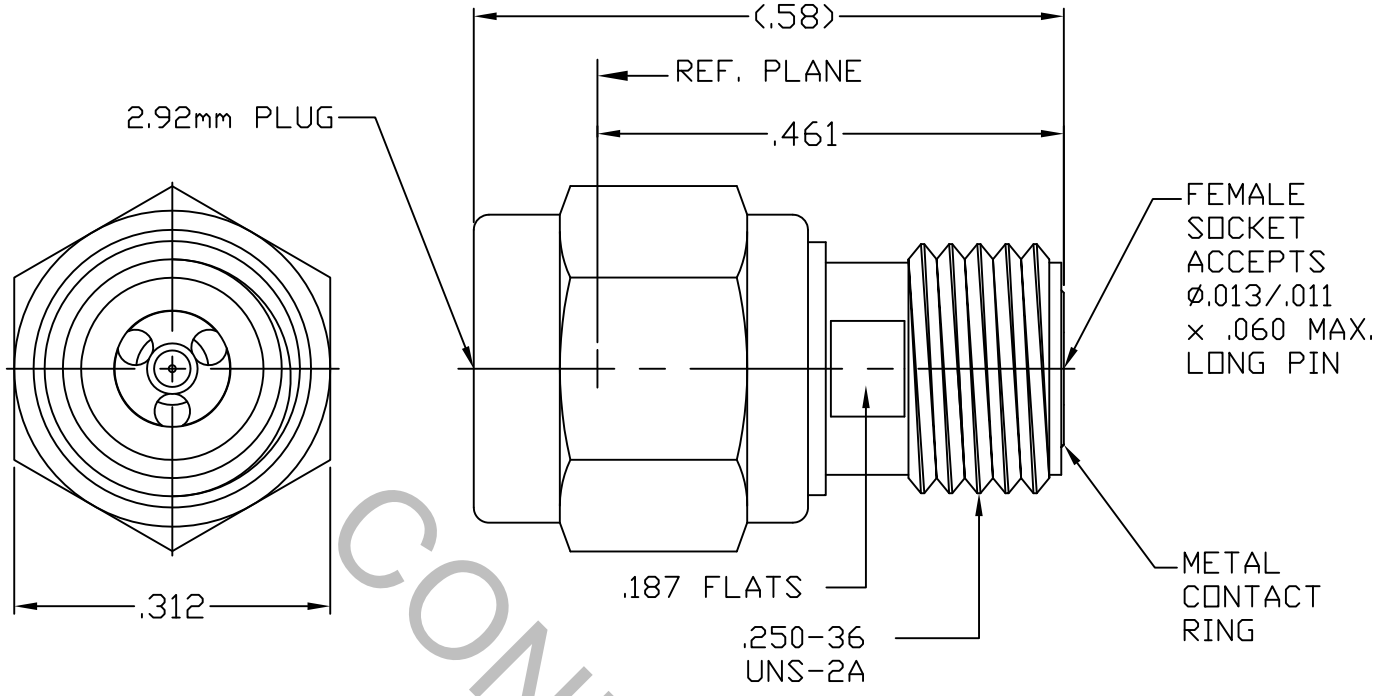

CONFIDENTIAL

1. MATING

INTERFACE DIMENSIONS PER MIL-STD-348 Fig 323.1 (2.92mm, PLUG)

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 40.0 GHz.
VSWR (MAX.) ❋	1.04 + .005 x FGHz.
INSERTION LOSS (dB MAX.)	.035 dB x $\sqrt{}$ FGHz.
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	-100 dB - FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	-55°c TO + 125°c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	10,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

❋ TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

REV.	DCN NO.	DATE	APP.
AA	11-2031	11/22/11	TS
AB	13-1682	5/7/13	TS

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
.X ± .030	± 1/64	X ± 1°
.XX ± .010		X' ± 15'
.XXX ± .005		

dynawave INCORPORATED
HAVERHILL, MA. 01835

DRAWN: TS DATE: 11/22/11

APP.: DC DATE: 11/22/11

TITLE
2.92mm PLUG, THREAD-IN
ACCEPTS .012 DIA. PIN

CODE IDENT. 2J899

SHEET 1 OF 2

DWG. NO. 9430-0085-6212

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT	
MAX. AXIAL FORCE	4.5 LBS.
MAX. RADIAL TORQUE	N/A
CENTER CONTACT AXIAL FORCES	
● INSERTION (MAX. OUNCES)	REAR 32.0
● WITHDRAWAL (MIN. OUNCES)	REAR 1.0
CONNECTOR ENGAGEMENT/DISENGAGEMENT(MAX. IN. LBS.)	2.0
CONNECTOR DURABILITY (MIN. CYCLES)	500
RRECOMMENDED MATING TORQUE	7 - 10 IN. LBS.
RRECOMMENDED MOUNTING TORQUE	27 - 30 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING	MIL-STD-202, METHOD 102, COND. C (-55 °c TO + 125 °c)
SHOCK	MIL-STD-202, METHOD 213, COND. I (100 G's)
VIBRATION	MIL-STD-202, METHOD 204, COND. D (20 G's)
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, LESS STEP 7b
CORROSION	MIL-STD-202, METHOD 101, COND. B (48 HOURS)
BAROMETRIC PRESSURE (ALTITUDE)	MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

CONFIDENTIAL

5. MATERIAL

CONNECTOR BODY, NUT & SLEEVE	STAINLESS STEEL PER ASTM A 582, TYPE 303, COND. A
CONTACT & RETAINING RING	BERYLLIUM COPPER PER ASTM B 196/B, 196M-03, COPPER ALLOY UNS 17300, TEMPER TD04.
INSULATOR	PLASTIC COMPOSITE
GASKET	SILICONE RUBBER PER ZZ-R-765.

6. FINISH

CONNECTOR BODY & NUT	PASSIVATE PER AMS 2700, TYPE 2, CLASS 4.
CONTACTS	GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 0.75 (.000030-.000055 THK.) OVER NICKEL PER SAE-AMS-QQ-N-290 CLASS 1 (.000050-.000075 THK.) OVER COPPER PER AMS-2418 (.000010 MIN. THK.)
PRESS SLEEVE	GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 1.27 (.000050 MIN. THK.) OVER NICKEL PER SAE-AMS-QQ-N-290 CLASS 1 (.000150 MIN. THK.) OVER NICKEL (WOODS OR WATTS) (.000010 MIN. THK.)
INSULATOR, RING & GASKET	N/A