


SPECIFICATION CONTROL DRAWING

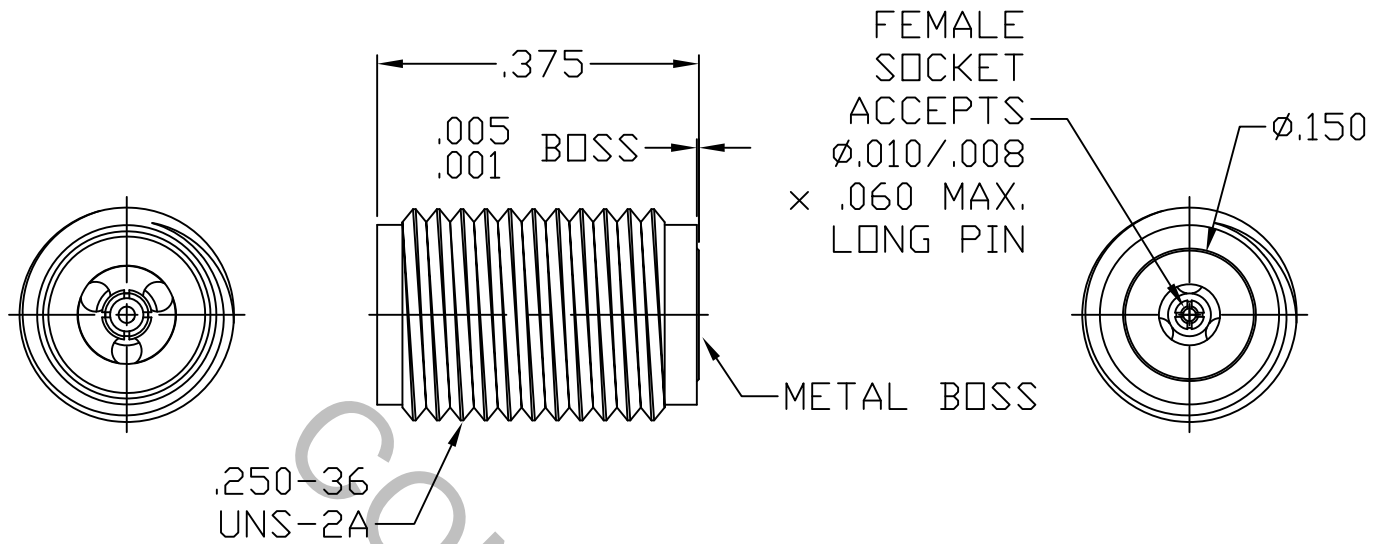

1. MATING INTERFACE DIMENSIONS FOR 2.92mm, JACK per MIL-STD-348A FIG. 323.2

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 40.0 GHz
VSWR (MAX.) *	_____	1.05 + .01 x FGHz
INSERTION LOSS (dB MAX.)	_____	.03 dB x √FGHz
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	250
RF LEAKAGE (MIN. dB DOWN)	_____	-100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65° c TO + 125° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	750
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	5,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

* TERMINATED IN A 50 OHM LOAD

RoHS
COMPLIANT

This Document contains proprietary and confidential information.

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			<small>INCORPORATED HAVERHILL, MA. 01835</small>
AA	03-1914	7/18/03	DC	DECIMALS	FRACTIONAL	ANGULAR	
AB	08-1662	7/21/08	DC	.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1°, 0' X°, X' ± 15'	
AC	16-2108	9/9/16	TS	DRAWN: G.E. DATE: 7/18/03			TITLE 2.92mm JACK, THREAD-IN, ACCEPTS Ø.009 PIN
AD	18-2413	12/20/18	TS	APP.: G.E. DATE: 7/18/03			
				CODE IDENT.	SHEET 1 OF 2		DWG. NO. 9530-0085-6208
				2J899			

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

MAX. AXIAL FORCE _____ 4.5 LBS.

MAX. RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

● INSERTION (MAX. OUNCES) _____ INTERFACE AND REAR 32.0

● WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0, REAR 1.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RRECOMMENDED MATING TORQUE _____ 7 - 10 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-25 °c TO + 125 °c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

CONNECTOR BODY & METAL BOSS _____ STAINLESS STEEL PER ASTM-A-582, TYPE 303, COND. A

CONTACTS _____ BERYLLIUM COPPER PER ASTM-B-196/M, 196-03, COPPER ALLOY No. UNS C17300, TEMPER TD04.

INSULATOR _____ PLASTIC COMPOSIT

6. FINISH

BODY _____ PASSIVATE PER AMS 2700, TYPE 2, CLASS 4.

METAL BOSS _____ GOLD PER ASTM-B-488, TYPE II, CODE C, CLASS 1.25
(.000050 Min. Thk.) OVER NICKEL PER SAE AMS QQ-N-290, CLASS 1
(.000050 Min. Thk.) OVER WOODS OR WATTS NICKEL (.000010 MIN. THK.)

CONTACTS _____ GOLD PER ATSM-B-488, TYPE I, CODE C, CLASS .75
(.000030 Min. Thk.) OVER NICKEL PER SAE AMS QQ-N-290, CLASS 1
(.000050 Min. Thk.) OVER COPPER PER AMS 2418 (.000010 MIN. THK.)

INSULATOR _____ N/A