


SPECIFICATION CONTROL DRAWING

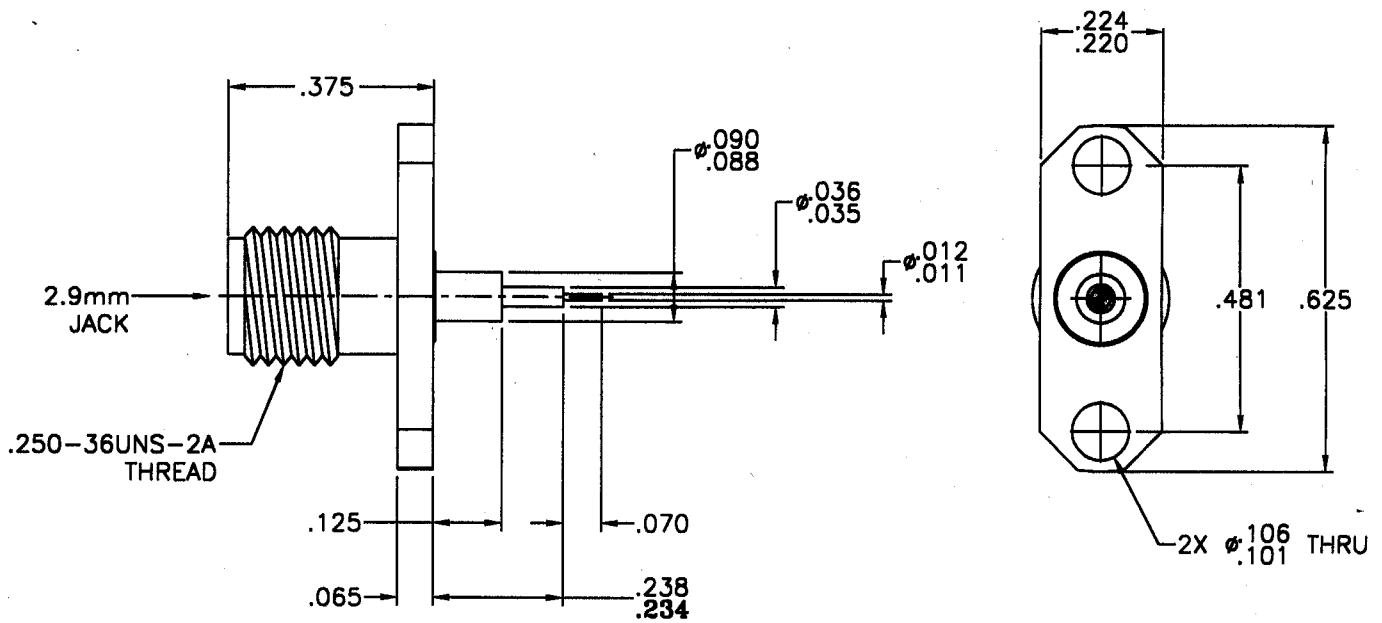

1. MATING INTERFACE DIMENSIONS FOR 2.9mm, JACK per MD-95.

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 40.0 GHz
VSWR (MAX.) *	1.05 + .01 x FGHz
INSERTION LOSS (dB MAX.)	.03 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	-25° c TO + 100° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	10,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			<small>INCORPORATED</small> HAVERHILL, MA. 01835
AA	01-0810	8/17/01	L	DECIMALS	FRACTIONAL	ANGULAR	
				.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1' 0" X° X' ± 15'	TITLE 2.9mm, JACK 2 HOLE FLANGE WITH .011 DIA. PIN
				DRAWN:	DATE:		
				APP.: L	DATE: 8/17/01		DWG. NO. 9552-0085-6212
				CODE IDENT. 2J899	SHEET 1 OF 2		

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT
 MAX. AXIAL FORCE _____ 6.0 LBS.
 MAX. RADIAL TORQUE _____ N/A
CENTER CONTACT AXIAL FORCES
 ● INSERTION (MAX. OUNCES) _____ INTERFACE 48.0
 ● WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0
 CONNECTOR ENGAGEMENT/DISENGAGEMENT(MAX. IN. LBS.) _____ 2.0
 CONNECTOR DURABILITY (MIN. CYCLES) _____ 500
 RRECOMMENDED MATING TORQUE _____ 7 - 10 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-25° c TO +100° c)
 SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)
 VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)
 MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b
 CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)
 BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

CONNECTOR BODY _____ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A
 CONTACT _____ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND. H.T.
 INSULATOR _____ TEFLON
 SLEEVE _____ BRASS PER ASTM B18, TEMPER H02, ALLOY C36000

6. FINISH

CONNECTOR BODY _____ PASSIVATE PER QQ-P-35A, TYPE I
 CONTACT _____ GOLD per MIL-G-45204, TYPE II, GRADE C, CLASS 2 (.000100 Minimum Thickness) OVER NICKEL per QQ-N-290, CLASS 1 (.000100 Minimum Thickness) OVER COPPER per MIL-C-14550 (.000010 Minimum Thickness).
 INSULATOR _____ N/A
 SLEEVE _____ NICKEL PER QQ-N-290 CLASS 1, OVER COPPER PER MIL-C-14550



SHEET 2 OF 2

DWG.
NO.

9552-0085-6212

REV.

AA