


SPECIFICATION CONTROL DRAWING

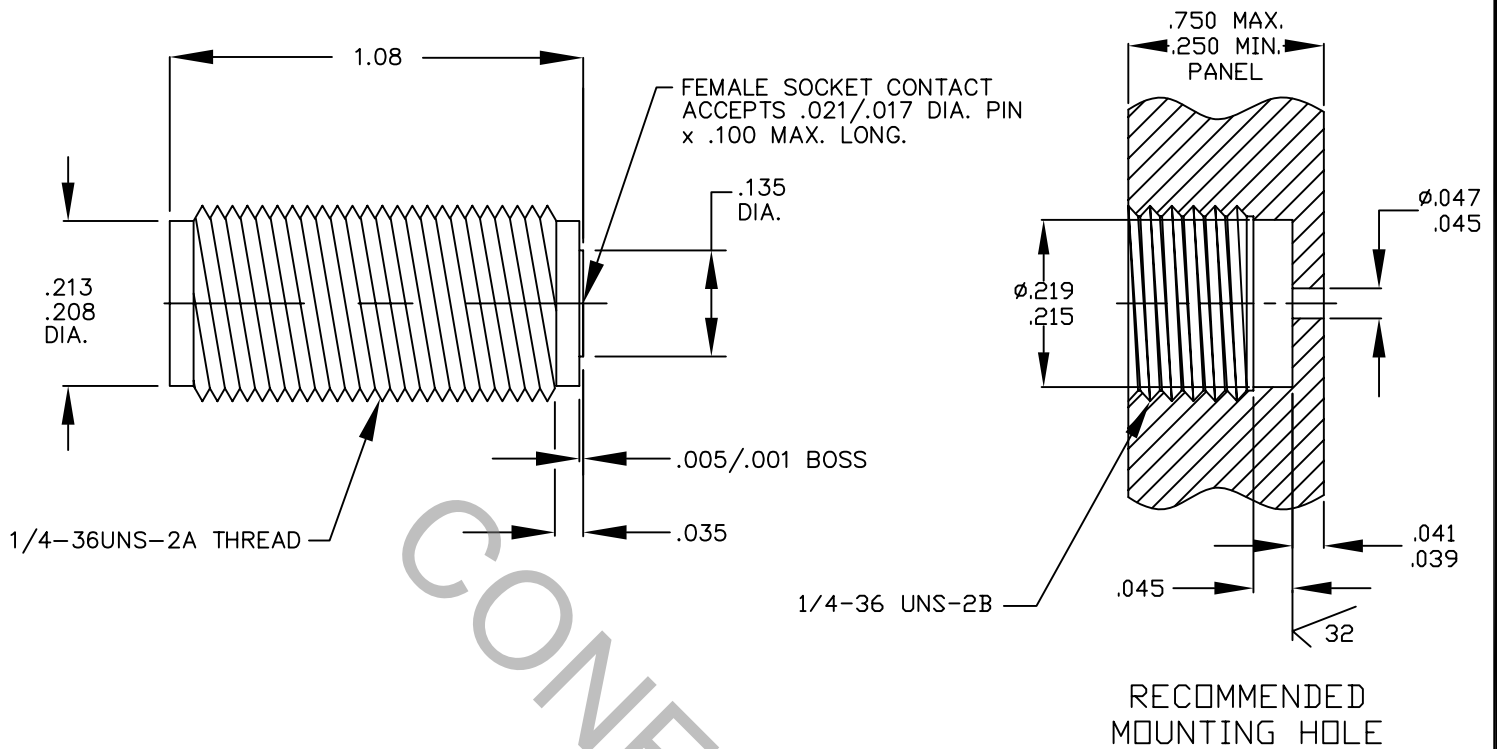

1. MATING INTERFACE DIMENSIONS FOR SMA JACK per MIL-STD-348 (Fig. 310-2).

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 26.5 GHz
VSWR (MAX.) *	_____	1.07 + .010 x FGHz.
INSERTION LOSS (dB MAX.)	_____	.04 dB x √FGHz
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	250
RF LEAKAGE (MIN. dB DOWN)	_____	100 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65°c TO + 165 °c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	750
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	10,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

*TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			dynawave INCORPORATED HAVERHILL, MA. 01835
				DECIMALS	FRACTIONAL	ANGULAR	
AA	00-1174	9/14/00	DGG	.X ±.030 .XX ±.010 .XXX ±.005	±/64	X ° ±1 0' X ° X' ±15'	TITLE SMA, JACK SCREW-IN FIELD REPLACEABLE
AB	06-1506	4/18/06	TS				
				DRAWN KLF	DATE 9/14/00		
				APPROVED DGG	DATE 9/14/00		
				CODE IDENT. 2J899	SHEET 1 OF 2	DWG. NO. 9930-0881-6280	

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

MAX. AXIAL FORCE _____ 6.0 LBS.

MAX. RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

● INSERTION (MAX. OUNCES) _____ INTERFACE 48.0; REAR 32.0

● WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0; REAR 1.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. IN. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE

● INTERFACE _____ 7 - 10 IN. LBS.

● PACKAGE _____ 15 - 20 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65°C TO + 200°C)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

BODY _____ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A

CONTACT _____ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND. H.T.

INSULATOR _____ TEFLON PER MIL-P-19468, AND L-P-403, TYPE I

6. FINISH

BODY _____ PASSIVATE PER QQ-P-35A, TYPE I

CONTACT _____ GOLD per MIL-G-45204, TYPE II, GRADE C, CLASS 2 (.000100 MIN. THK.) OVER NICKEL per QQ-N-290, CLASS 1, (.000100 MIN. THK.) OVER COPPPER per MIL-C-14550 (.000010 MIN. THK.).

INSULATOR _____ N/A